


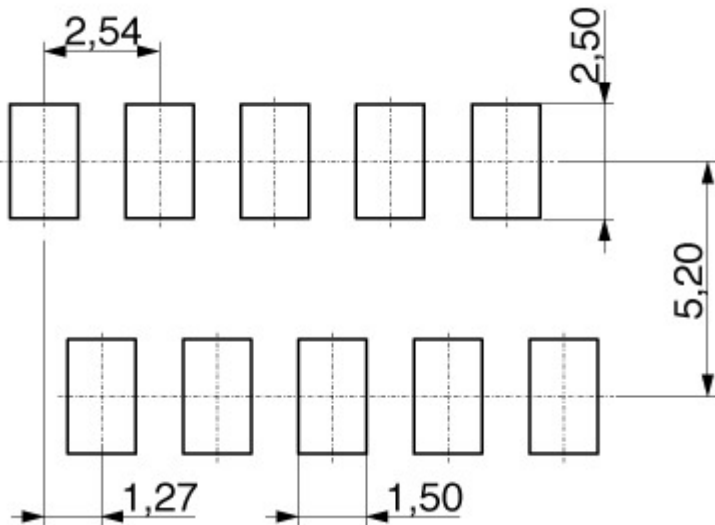
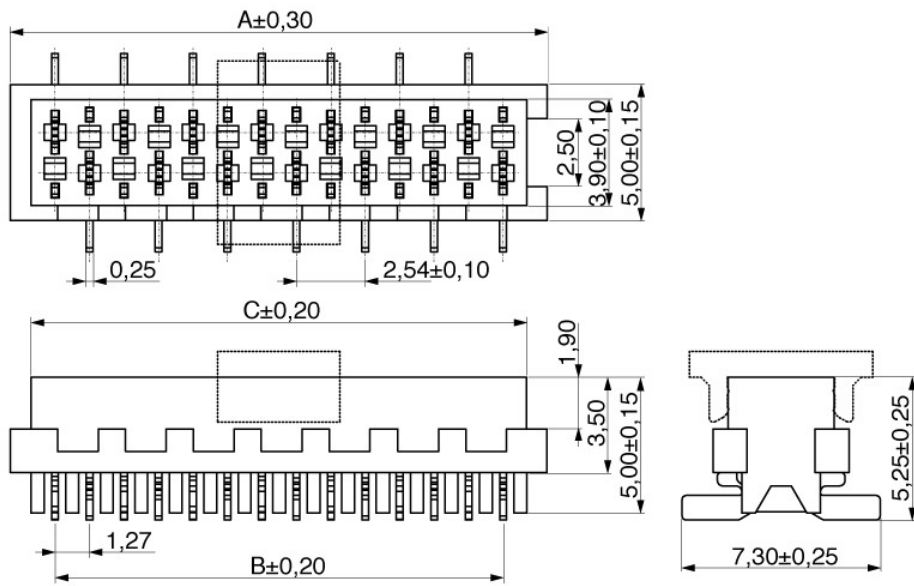


Pitch (mm)	1,27
Pincount	18
Gender	Female
Polarising	yes
Locking	No
Material contact	Phosphor bronze
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current IEC	1,0 A
Rated voltage	230 V RMS / V DC
Withstand voltage	500 V RMS for 1 Minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Board termination	 SMD Gull Wing
Orientation to PCB	 Vertical
No of rows	2
Cap	Without cap
AWG	28
Contact style	Die cut
Socket layout	 DIL strip (Dual-in-line)
Packaging	Tube
A	24,78
B	21,59
C	23,38





Order code: **374-1-018-0-NTX-KT0**



binder mpe GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Telefon: +49 (0) 83 62 / 91 56-0
E-Mail: info@mpe-connector.de

Creation date: **01.12.2025**, Internet: <https://www.mpe-connector.de/en/products/socket-connectors/female-header-micro-match-smd-127-mm/374-1#374-1-018-0-NTX-KT0>