


Polzahl No. of pos.	A ±0.2	B ±0.1	C ±0.1	D ±0.1	Art.-Nr. Part-No
13	45.6	12x2.5=30	12x2.5=30	40	101E10079X
21	65.6	20x2.5=50	20x2.5=50	60	101E10099X
31	90.6	30x2.5=75	30x2.5=75	85	101E10119X

NOTES:

- INSULATOR: PC GF UL 94 V-1, GREY
- CONTACTS: COPPER ALLOY
PLATING: HARD SILVER PLATED
500 MATING CYCLES
- CONNECTOR IS PART MARKED: PART-NÖ CONEC ABC

P.C.B. HOLE DRILLINGS

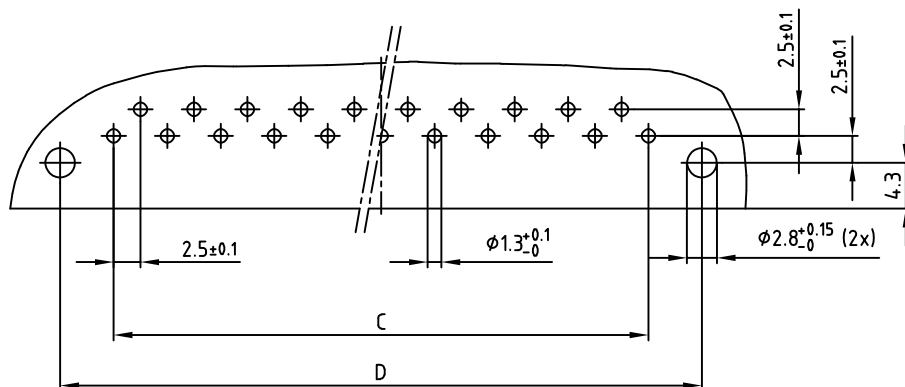

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
1 x c	Ä23-0990	23.06.2023	JLE
1 x b	Ä4688	15.03.2013	E.Mick.
a	Original		

tolerance		dim. in mm	
2006	date	name	
drawn	21.08.	Sonnenberg	
appd.	21.08.	Mickenbecker	
norm	DIN 41617		

scale:		2:1	
material:		SEE NOTES	
title:			
MALE CONNECTOR			
13pos.-31pos. / 2,5mm			
with angled solder pins			
dwg no:			DIN-A
10K4A014			3
part no:			sh: 1/1
SEE TABLE			

