

Lautsprecher LSF-15SMD2


Art.-Nr.: 107034SA

Specification :

1	Rated Input Power	0.5W
2	Max Input Power	1.0W
3	Rated Impedance	8Ω±15%
4	Sound Pressure Level S.P.L.	87dB (0.5W/0.1m)±3dB
5	Resonance Frequency (Fo.)	850±20%Hz
6	Frequency Range	FO~20kHz
7	Distortion	Less than 5% at 2kHz input Rated Power
8	Magnet	Rare earth permanent (SMCO) 6.7x1.1mm
9	Weight (g)	1.5
10	Temperature	Operating: -30~+85°C Storage: -40~+85°C
11	RoHS	Yes


Dimensions :

(Unit :mm)

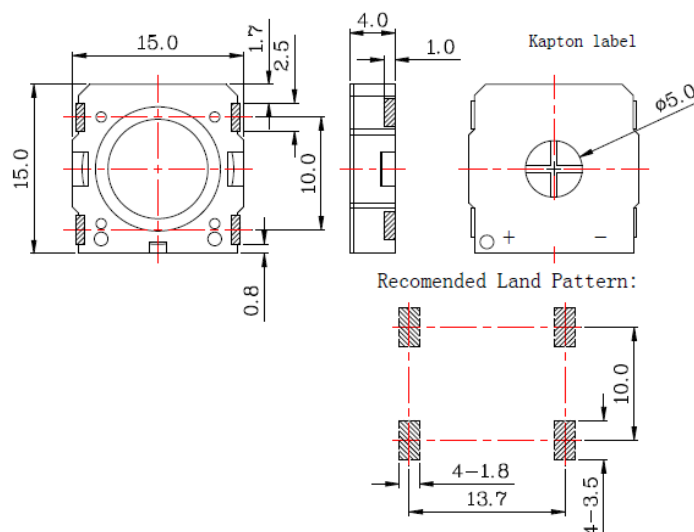


Lautsprecher LSF-15SMD2 Art.-Nr.: 107034SA


Measuring Method :

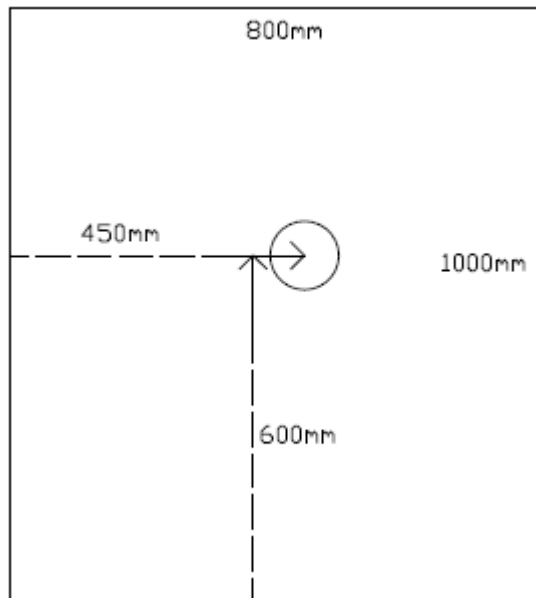

Frequency Response :

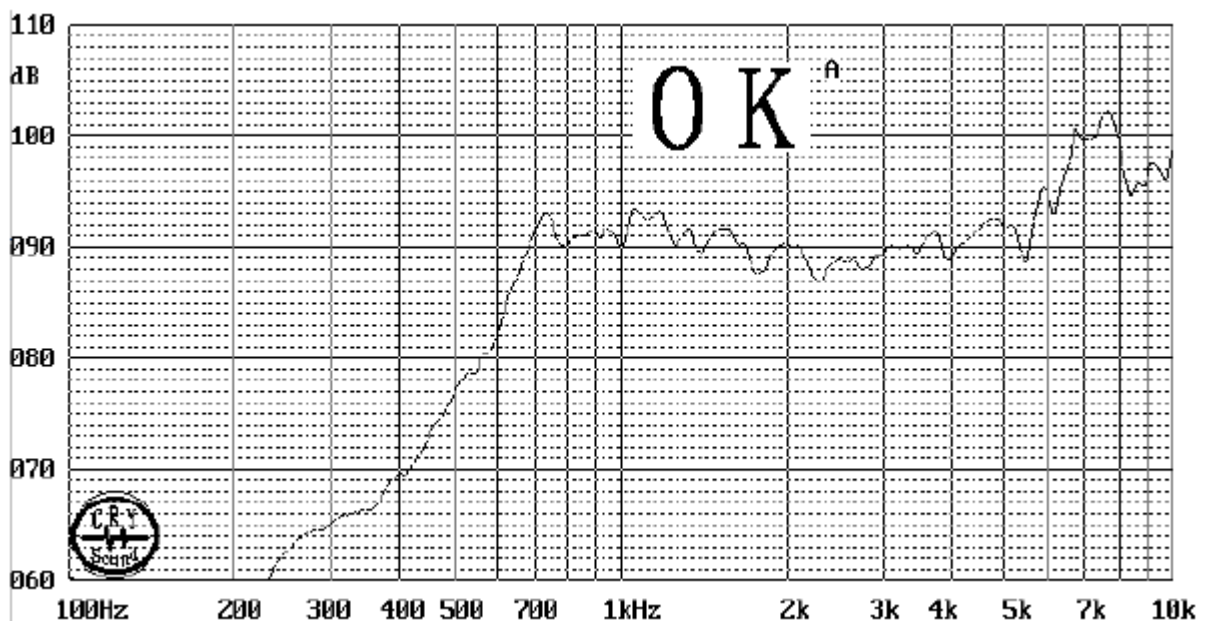

Lautsprecher LSF-15SMD2 Art.-Nr.: 107034SA
Environment Test :

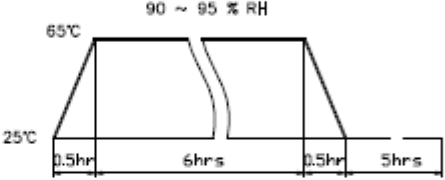
ITEM	SPECIFICATIONS
01	High temp. Test Keep 96 hours at $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test Keep 96 hours at $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test Keep 96 hours at $+40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 92-95% and leave 3 hours in normal temperature and then checked.
04	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p>  <p>The graph shows a temperature cycle starting at 25°C, ramping up to 65°C in 0.5 hours, holding at 65°C for 6 hours at 90-95% RH, ramping down to 25°C in 0.5 hours, and finally holding at 25°C for 5 hours.</p>
05	Thermal cycle test. Low temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration 10~55~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test Fix on jig. Then drop from 152cm height to the concrete floor X,y, z 6 direction. 5 times each, total 30 times.
08	Free drop test Free drop from 100cm height to the concrete floor X,Y, Z 6 direction. 1 times each, total 6 times.
09	Load test Rated Power White noise is applied for 96 hours
10	Max Power test Max power 1 min. on - 2 min. off 10 cycles.
11	Terminal strength test Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
Criterion : After these test , the change of S.P.L shall be within ± 3 dB	

Lautsprecher LSF-15SMD2 Art.-Nr.: 107034SA

Soldering Condition :

(1) Recommendable reflow soldering condition is as follows
(Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed
after heat of product goes down to normal.

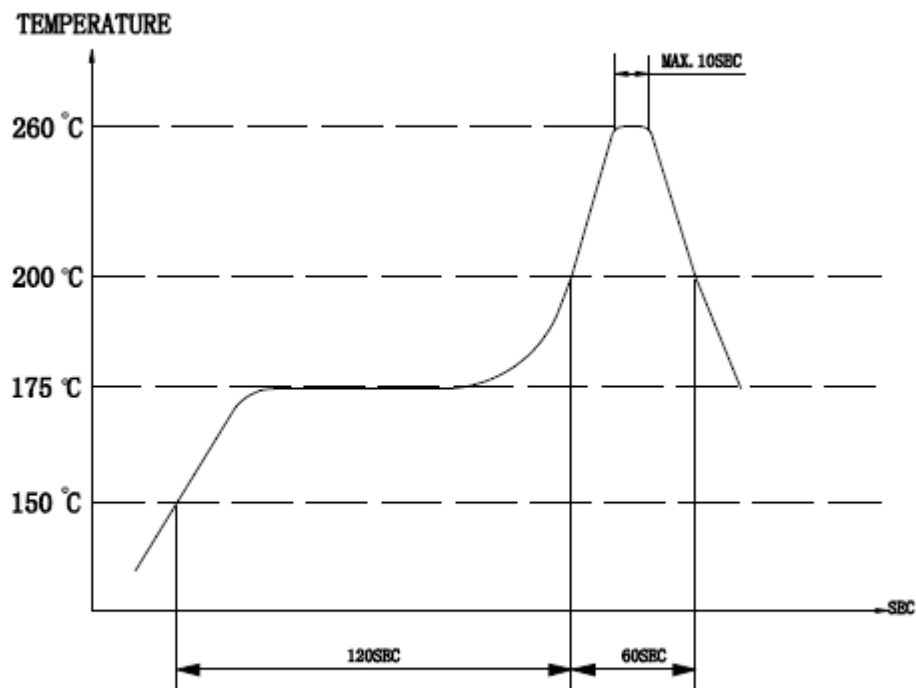

Heat resistant line

(Used when heat resistant reliability test is performed)

(2) Manual soldering

Manual soldering temperature 350° C within 5 sec.

Lautsprecher LSF-15SMD2 Art.-Nr.: 107034SA

Packing :

