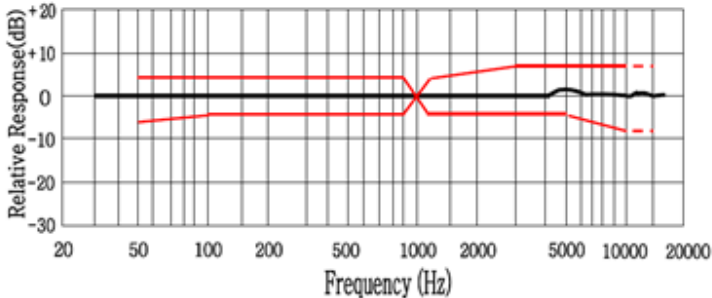
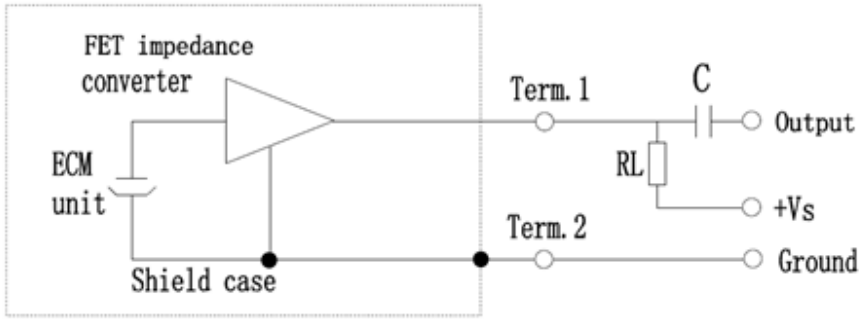


Mikrofon EMY-9745NP-42



Art.-Nr.: 200410

Specification :

Electrical Specifications:		
3.1	Sensitivity Range	-42±3dB RL=2.2KΩ Vs=4.5V(1KHz 0dB=1V/Pa)
3.2	Impedance	Max. 2.2KΩ 1KHz (RL=2.2KΩ)
3.3	Frequency	20-16000 Hz
3.4	Current Consumption	Max.0.5mA
3.5	Operation Voltage Range	1.0V-10V
3.6	Max. Sound Pressure Level	110dB S.P.L
3.7	S/N Ratio	More than 58dB
3.8	Sensitivity Reduction	3.0V-2.0V Sensitivity Variation less than 3dB
3.9	RoHS and REACH compliance	YES
3.10 Typical Frequency Response Curve		
		
3.11 Schematic Diagram:		
		
$R_L=2.2K\ \Omega$, $V_S=4.5V$ $C=1\mu F$		



Mikrofon EMY-9745NP-42

Art.-Nr.: 200410

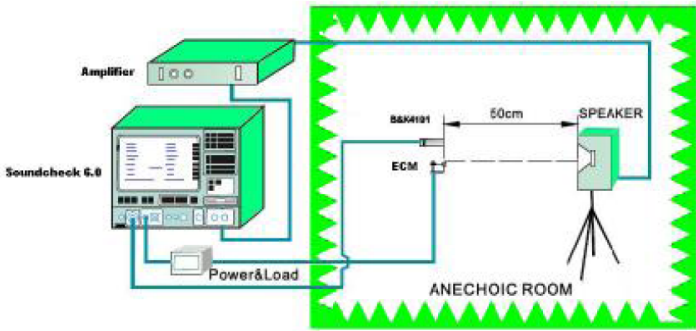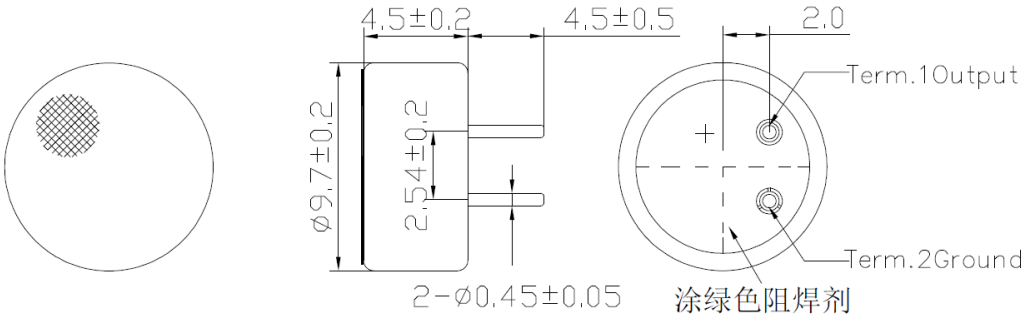3.12 Test Setup Drawing:											
											
Mechanical Specifications:											
4.1	<p>Appearance Drawing (mm)</p> 										
4.2	<table border="1"> <tr> <td>Weight</td> <td>0.20g</td> </tr> </table>	Weight	0.20g								
Weight	0.20g										
<p>Reliability Tests: After any following tests, the sensitivity of the microphone unit shall not change more than $\pm 3\text{dB}$ from initial value, and shall keep their initial operation and appearance.</p>											
5.1	<table border="1"> <tr> <td>Hi-Temp. Test</td> <td>The microphone unit must be subjected to $+70^{\circ}\text{C}$ for 240 Hours, and expose to room temperature for 3 Hours.</td> </tr> <tr> <td>5.2</td> <td> <table border="1"> <tr> <td>Low-Temp. Test</td> <td>The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.</td> </tr> <tr> <td>5.3</td> <td> <table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table> </td> </tr> </table> </td> </tr> </table>	Hi-Temp. Test	The microphone unit must be subjected to $+70^{\circ}\text{C}$ for 240 Hours, and expose to room temperature for 3 Hours.	5.2	<table border="1"> <tr> <td>Low-Temp. Test</td> <td>The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.</td> </tr> <tr> <td>5.3</td> <td> <table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table> </td> </tr> </table>	Low-Temp. Test	The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.	5.3	<table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table>	Humi.&Heat Test	The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .
Hi-Temp. Test	The microphone unit must be subjected to $+70^{\circ}\text{C}$ for 240 Hours, and expose to room temperature for 3 Hours.										
5.2	<table border="1"> <tr> <td>Low-Temp. Test</td> <td>The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.</td> </tr> <tr> <td>5.3</td> <td> <table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table> </td> </tr> </table>	Low-Temp. Test	The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.	5.3	<table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table>	Humi.&Heat Test	The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .				
Low-Temp. Test	The microphone unit must be subjected to -20°C for 240 Hours, and expose to room temperature for 3 Hours.										
5.3	<table border="1"> <tr> <td>Humi.&Heat Test</td> <td>The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .</td> </tr> </table>	Humi.&Heat Test	The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .								
Humi.&Heat Test	The microphone unit must be subjected to $+60^{\circ}\text{C}$, 93% RH-for 240 Hours, and expose to room temp for 3 Hours .										

Mikrofon *EMY-9745NP-42*

Art.-Nr.: 200410

5.4	Thermal Shocking Test	The microphone unit must be subjected to a environment from - 20℃ for30 minutes to the end of +70℃ for 30 minutes, which shall be repeated 5 cycles and exposed to room temperature for 3 hours .		
5.5	Vibration Test	The microphone unit must be subjected to a procedure that after vibrating for two hours from each of the two directions with a frequency of 10-55Hz and a 1.52mm-high amplitude.		
5.6	Dropping Test	The microphone unit must be subjected to a procedure that after dropping to a slippery marble floor for 5 times from a 1-meter-high without package.		
Environmental Condition:				
6.1	Storage condition	-40℃~+75℃ R.H. less than 90%		
6.2	Operation condition	-20℃~+70℃ R.H. less than 90%		
6.3	Arbitration condition	Temperature : 20℃ ± 1℃ Relative humidity: 63%~67% Air pressure : 86~106Kpa		
Packaging				
---	DRAWING	QTY (PCS)	SIZE(mm)	MARKING
INNER BOX		100	100X100X8	AS CUSTOMER'S P.O
OUTER BOX		15000	425 X 265 X 110	AS CUSTOMER'S P.O
Output Inspection standard				
Output inspection standard is executed according to (GB/T2828. 1-2003) .				