

SMD-Signalgeber (ohne Ansteuerung) **SMD-22D12** Art.-Nr.: 220061


Specification :

TYPE	UNIT	SMD-22D12
• Min. Sound Output at 10cm	dB	90
Rated Voltage	Vp-p	12
Operating Voltage	Vp-p	1~25
• Resonant Frequency	Hz	4.000±500
• Max. Current Consumption	mA	5
Electrostatic Capacity	pF	19000±30%
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+80
Weight	g	4.0
Housing Material		PPS (Black)
RoHS		Yes

- Value applying at rated voltage

Dimensions :

(Unit: mm)

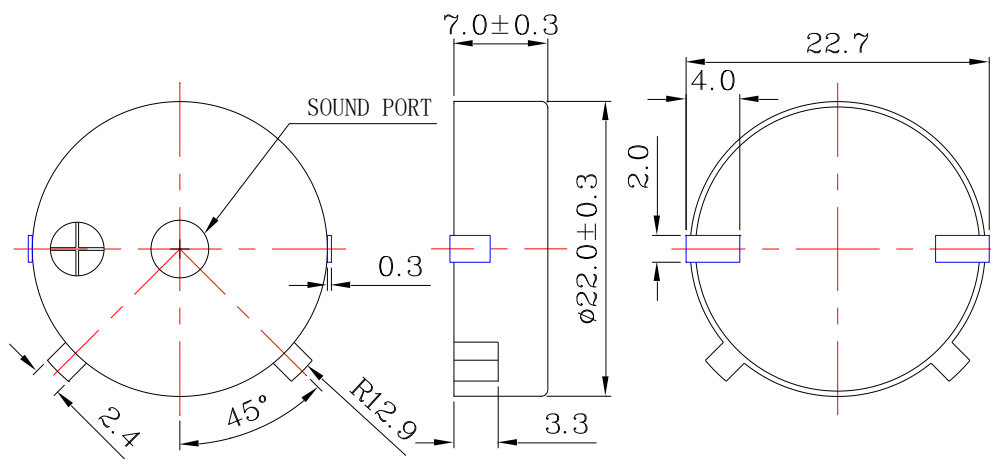

SMD-Signalgeber (ohne Ansteuerung) SMD-22D12 Art.-Nr.: 220061


Testing Method :

Standard Measurement conditions


Temperature: $25 \pm 2^\circ\text{C}$ Humidity: 45-65%

Acoustic Characteristics:

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

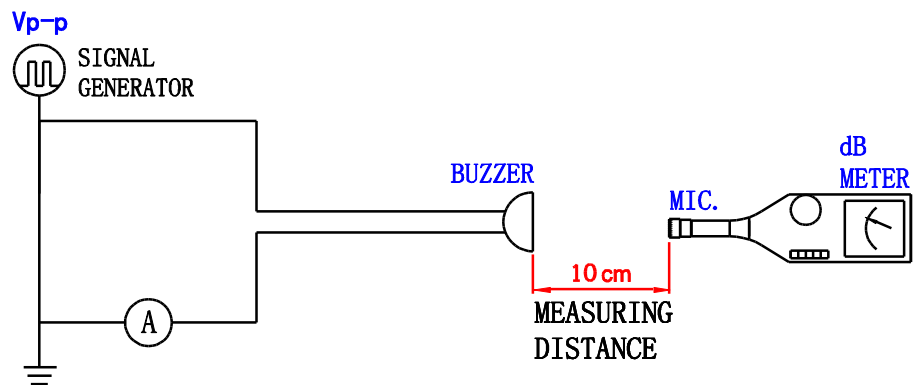


In the measuring test, buzzer is placed as follows:

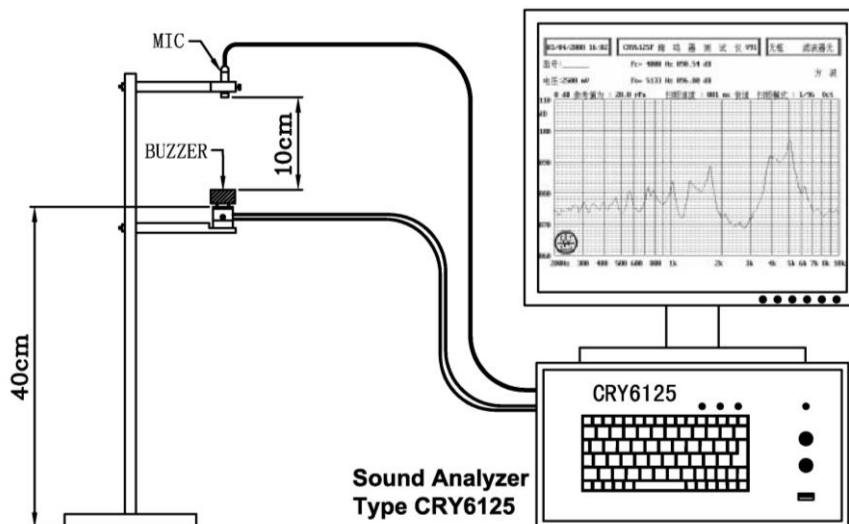

SMD-Signalgeber (ohne Ansteuerung) SMD-22D12 Art.-Nr.: 220061

Typical Frequency Response Curve :

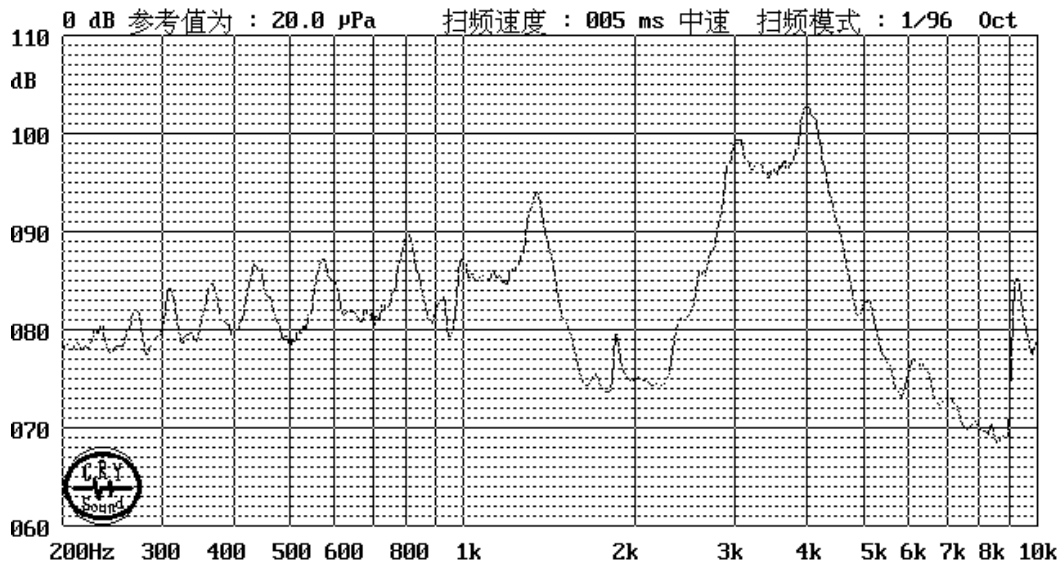


Picture :



Soldering Condition :

(1)Recommendable reflow soldering condition is as follows
(Reflow soldering is twice)

Note:It is requested that reflow soldering should be executed
after heat of product goes down to normal.

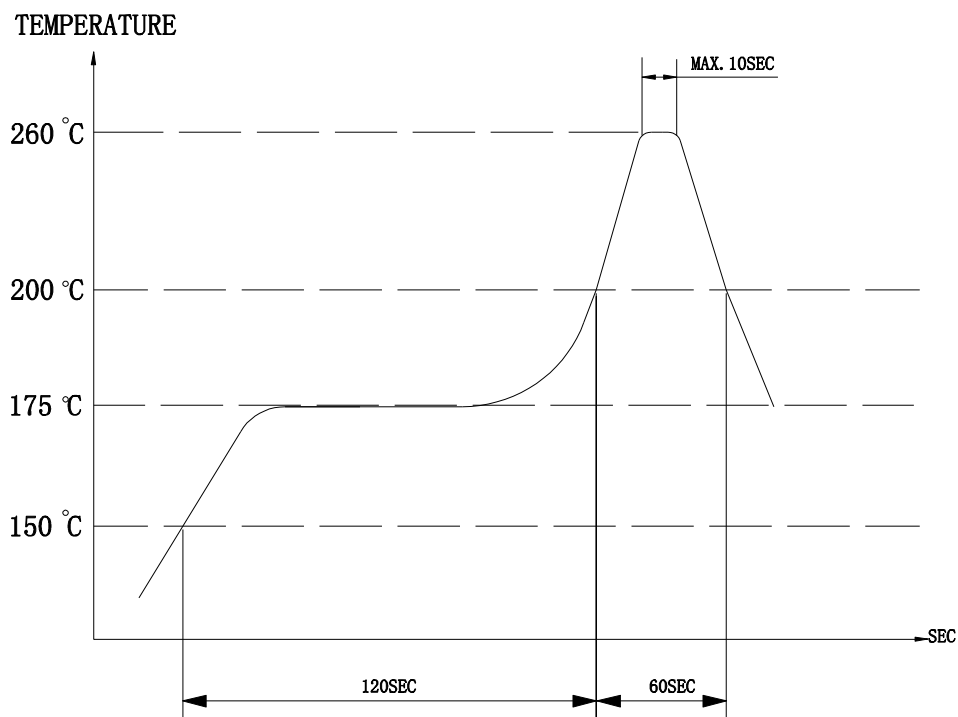

Heat resistant line


(Used when heat resistant reliability test is performed)

(2)Manual soldering




Manual soldering temperature 350 °C within 5 sec.

SMD-Signalgeber (ohne Ansteuerung) SMD-22D12 Art.-Nr.: 220061

Reliability Test :

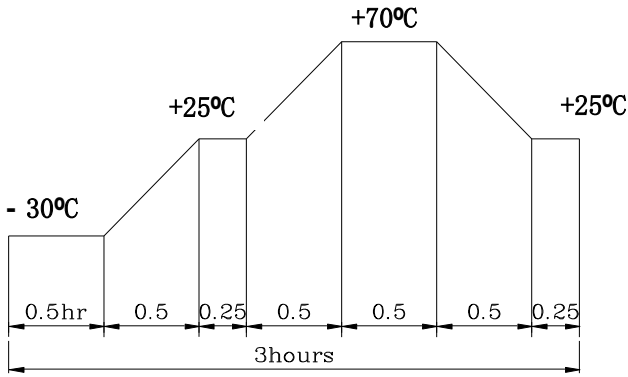NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	After being placed in a chamber with 80±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
2	Low Temperature Test (Storage)	After being Placed in a chamber with -40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
4	Temperature Cycle Test	<p>The part shall be subjected to 5 cycles. One cycle shall be consist of:</p>  <p>The diagram shows a temperature cycle profile over 3 hours. It starts at -30°C for 0.5 hours, then ramps up to +25°C in 0.5 hours, holds at +25°C for 0.25 hours, ramps up to +70°C in 0.5 hours, holds at +70°C for 0.5 hours, ramps down to +25°C in 0.5 hours, holds at +25°C for 0.25 hours, and finally ramps down to -30°C in 0.5 hours. The total duration is 3 hours.</p> <p>Allowable variation of SPL after test: ±10dB.</p>
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm . Allowable variation of SPL after test: ±10dB.
6	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours . Allowable variation of SPL after test: ±10dB.
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300±5°C for 3±1 seconds . 90% min. lead terminals shall be wet with solder (Except the edge of terminals).
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds. No visible damage and cutting off.

SMD-Signalgeber (ohne Ansteuerung) SMD-22D12 Art.-Nr.: 220061

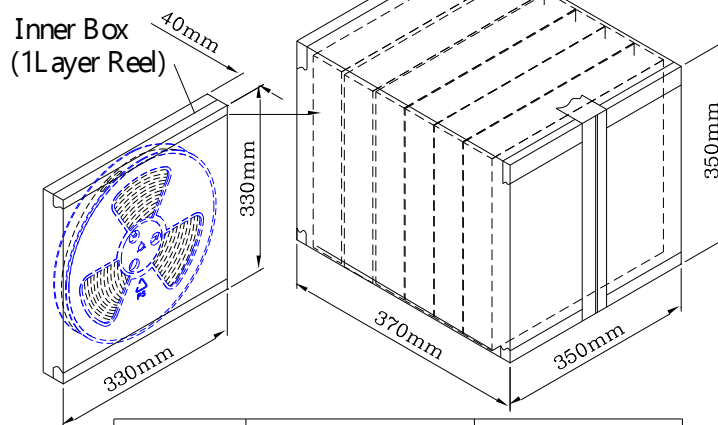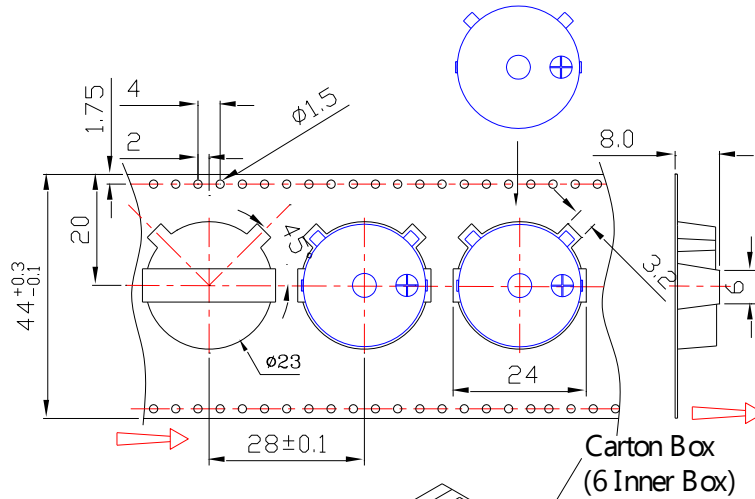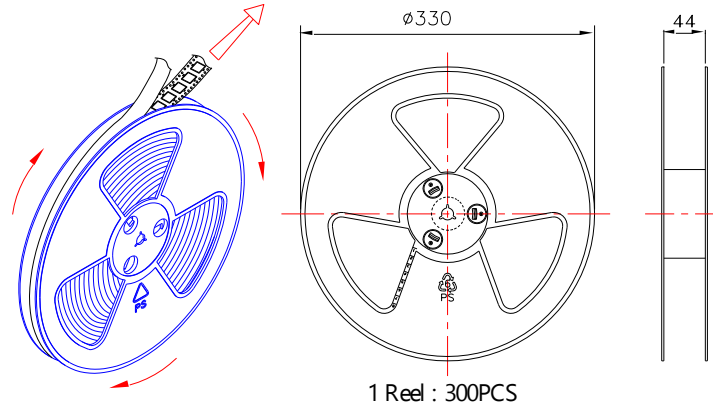

Inner Box	330mmx330mmx40mm	1x300PCS=300PCS
Carton Box	350mmx350mmx370mm	6x300PCS=1800PCS