

嘉耐股份有限公司  
**JYA NAY CO., LTD.**

安全規格認證型陶瓷電容器

**Safety standard certified ceramic capacitor**

**JY TYPE(Y2:250V)**

**X1:400V Y2:250V**

總公司 桃園市中壢區民族路六段 230 巷 9 號

Head Office: 9 Ln 230 Sec 6 Minzu Rd Zhongli District Taoyuan Taiwan

[Tel:886-3-4903829](tel:886-3-4903829) Fax:886-3-4903871 e-mail: [sales@jyanay.com.tw](mailto:sales@jyanay.com.tw)

<b>JNC</b>	<b>Safety Standard Recognized Ceramic Capacitor</b>
------------	---

1. This specification is applied to following Safety Standard Recognized Ceramic Capacitor for Electronics Appliance.

TUV / ENEC18

X1, Y2 Class based on IEC/EN 60384-14 2013

UL /CSA

X1, Y2 Class based on CAN/ANSI/UL 60384-14

2. Approval Standard and Recognized No.

	Standard No.	Certificate No.	Rated Voltage
UL/CSA	UL 60384-14	E201384	X1:400V AC Y2:250V AC
TUV	IEC/EN 60384-14 2013	R50232061	
ENEC 18	EN 60384-14 2013	HN 69250772	
CQC	IEC 60384-14	CQC13001087288	

3. Part No.


Ex.

<b>JY</b>	<b>08</b>	<b>B</b>	<b>221</b>	<b>K</b>	<b>Y</b>	<b>7</b>	<b>2</b>	<b>N</b>
<b>Type</b>	<b>Body Dia.</b>	<b>T.C.</b>	<b>Nominal Capacitance</b>	<b>Capacitance Tolerance</b>	<b>Lead Style</b>	<b>Lead Spacing</b>	<b>Lead Length</b>	<b>RoHS</b>
X1:400V AC		E:Y5U		J:±5%	L	0: 10mm	2:25 mm Min.	H:HF
Y2:250V AC		F:Y5V		K:±10%	Y	1: 12.5mm	3:3.5±1 mm	N:RoHS
		B:Y5P		M:±20%	K	5: 5.0mm	5:5±1 mm	
		SL:SL			D	6: 6.4mm	T1/T2:Taping Box	
						7: 7.5mm	R1/R2:Taping Reel	

4. Rating

4.1 Operating Temperature:25/125/21

4.2 Lead Style:

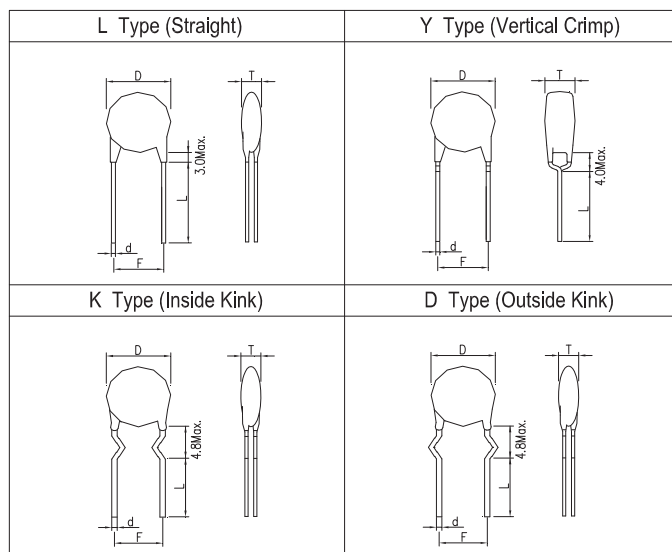

*JNC*

Safety Standard Recognized Ceramic Capacitor

Marking:

1. Company Name Code : JNC

2. Type Designation : JY

Ex.


3. Nominal Capacitance: 3-digit-system

4. Capacitance Tolerance: Code

5. Manufactured Date: Abbreviation

Ex. 2012

_____1(January)	21
_____2(February)	22
:              :	:
_____10(October)	20
_____11(November)	2N
_____12(December)	2D



20\*:

\*:NONE Made in Taiwan

\*:C Made in Dongguan

6. Approval Mark:

TUV Approval Mark:



CUL Approval Mark:



ENEC Approval Mark:



EN/UL 60384-14 CLASS CODE: X1, Y2

Rated Voltage Mark: 400V~ , 250V~

**JNC****Safety Standard Recognized Ceramic Capacitor X1,Y2****Part Numbering****JY Type-Class X1: 400VAC, Y2: 250VAC**

Part Number	Temp. Char.	Cap. (PF)	Cap. Tol. (%)	Dimensions(Unit:mm)				AC Tested Vol. V(r.m.s.)
				D (Max.)	F (±1.0)	T (Max.)	φ d	
JY08B101K□□□□	<b>B (Y5P)</b>	100	<b>±10%</b>	8.0	5.0	5.0	0.6±0.1	2600
JY08B151K□□□□		150						
JY08B181K□□□□		180						
JY08B221K□□□□		220						
JY08B331K□□□□		330						
JY08B471K□□□□		470						
JY09B561K□□□□		560		9.0				
JY09B681K□□□□		680		9.0				
JY10B102K□□□□		1000		10.0				
JY08E102M□□□□		<b>E (Y5U)</b>		1000				
JY09E152M□□□□	1500		9.0					
JY10E222M□□□□	2200		10.0					
JY11E252M□□□□	2500		11.0					
JY12E332M□□□□	3300		12.0					
JY13E392M□□□□	3900		13.0					
JY14E472M□□□□	4700		14.0					
JY08F102M□□□□	<b>F (Y5V)</b>	1000	<b>±20%</b>	8.0	7.5/10	5.0	0.6±0.1	2600
JY08F152M□□□□		1500		8.0				
JY09F222M□□□□		2200		9.0				
JY10F252M□□□□		2500		10.0				
JY10F332M□□□□		3300		10.0				
JY11F392M□□□□		3900		11.0				
JY12F472M□□□□		4700		12.0				
JY13F502M□□□□		5000		13.5				
JY14F562M□□□□		5600		14.0				
JY15F682M□□□□		6800		15.0				
JY16F103M□□□□		10000		16.0				