



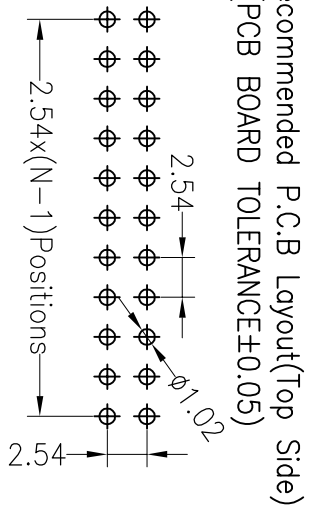

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c



Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

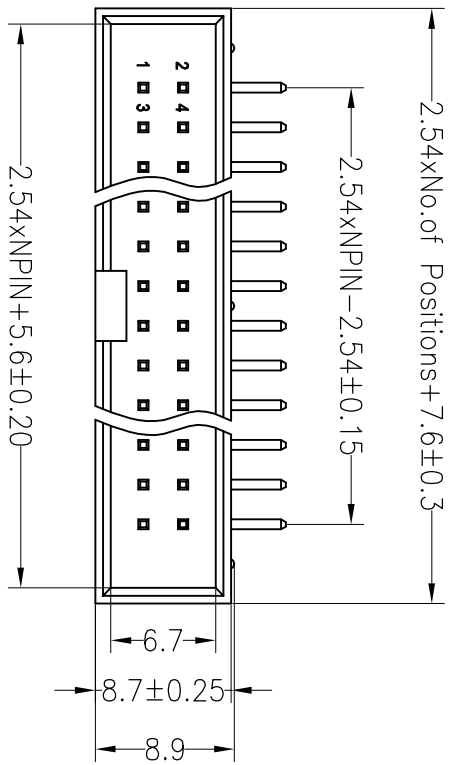

**Ordering Information**

3210 XX R XX X B K00 X 01

- No. of Pins 6---64
- Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin
- Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP
- Packing T=Tube A=Tray P=Tube+Cap

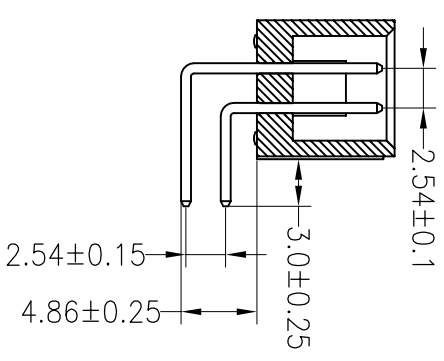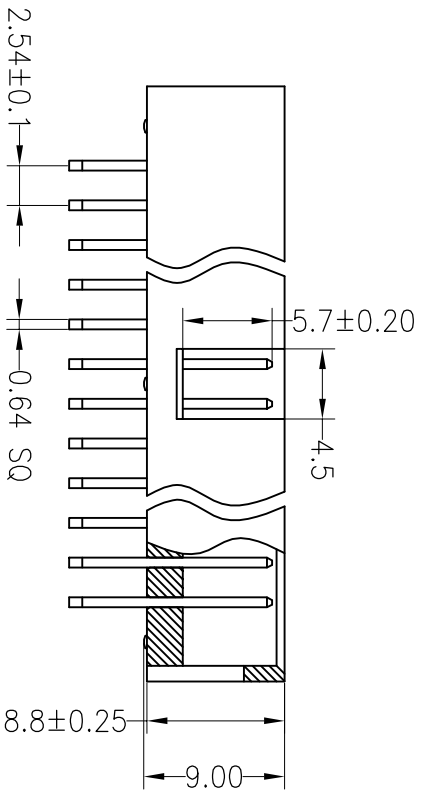

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	13.08.15	UNIT	mm	A4	1/1	3210XXXXXXBK00X01	
X.XX	±0.20	CHECK		SIZE					
X:XXX	±0.10			SHEET					
Angle	±3°	APPROVE		PROJ.					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	TITLE:			
1	2013.08.15	NEW DRAWING				2.54mm Box Header H8.8mm 90° L=16.0/L=21.0			

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892