HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

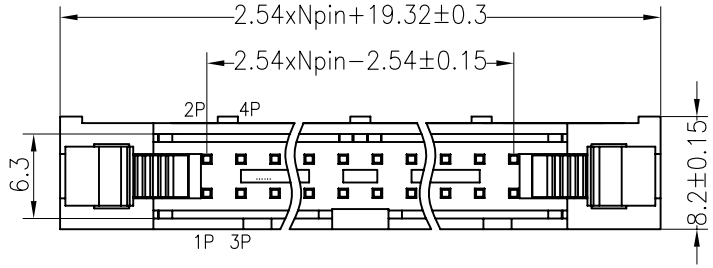

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

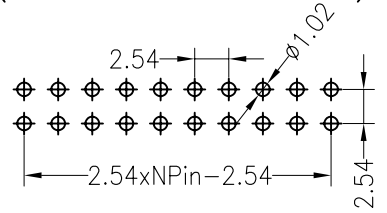



Long Latch



Short Latch

Ordering Information

3310 XX S XX X X X X 01

No.of Pins Per Row	Contact Plating	Insulator Material Option	Color Type	Latch Type	Packing
6--64	G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 F=BK−PA9T F=BK−LCP	B=Black G=Grey	L=Long Latch S=Short Latch N=Without Latch	0=PE Bag A=Tray T=Tube P=Tube+Cap

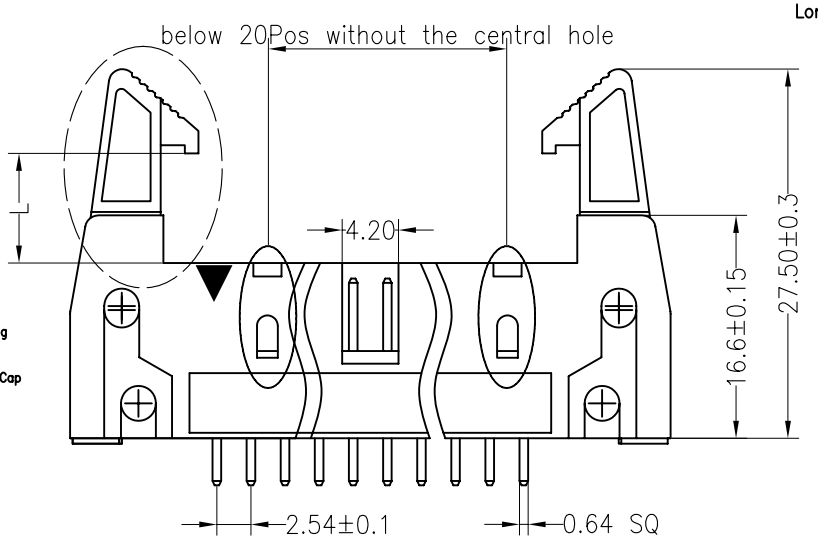

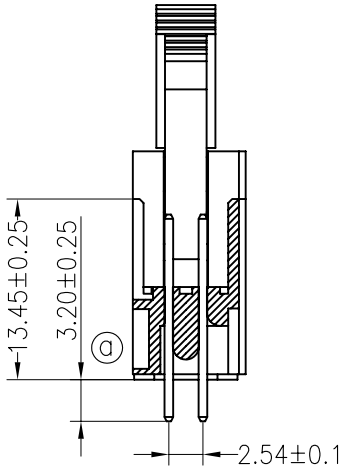

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2014.05.08	DIP尺寸更改为3.2	ⓐ
A0	2012.03.28	NEW DRAWING	

OPERATION		DRAW	WZG	14.05.13
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JiLN ® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992

PART NO.	3310XXSXXXXXX01
TITLE:	2.54 ejector header Npin 180°