


**SAFETY ISOLATING TRANSFORMER**

POWER : 2.8VA  
 INPUT VOLTAGE : 230V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 9V~

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER  
 IPOD  
 UL94V0  
 OPERATING TEMPERATURE : -25°C to 40°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 INHERENT PROTECTION

**STANDARDS :**

- UL5085 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

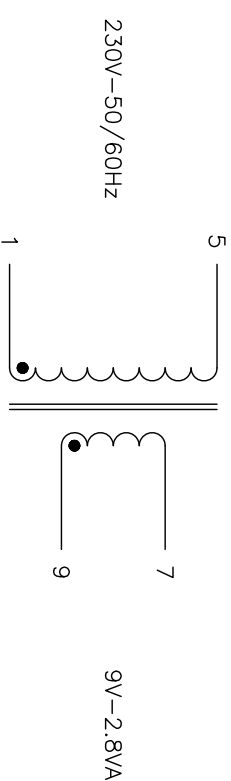

Entonci:		Tolérance générale:	
Entonci:		General tolerance:	
Ech:	1:1		
Matière:			
Matériau:			
Dessiné par:	ROUSSEL.Ch	Date:	18/05/2004
		Visé:	J.P.M.

**DATA SHEET 44698**  
**EI 30X18**



22, Allée du Clos des Champs  
 Z.A. Les Portes de la Forêt  
 77090 COLLEBEN  
 Tél : 01-60-57-55-55  
 Fax : 01-60-17-12-00

**DS44698**

Rev	Date	Modification	Dessiné	Visé
D				
C				
B	18/4/16	Marking updated	SCOTT	J.P.M
A	15/12/14	Marking updated	SCOTT	J.P.M