

SAFETY ISOLATING TRANSFORMER

POWER : 2.8VA
 INPUT VOLTAGE : 230V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 2x9V~


INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER
 IP00
 UL94V0
 OPERATING TEMPERATURE : -25°C to 40°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 INHERENT PROTECTION

STANDARDS :

- UL5085 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

mytra 44704
 EIS0618
 PRI: 1-5 230V~ 50/60Hz
 SEC: 6-7 9V~ 1.4VA
 SEC: 9-10 9V~ 1.4VA

 In 4018
 www.mytra.com

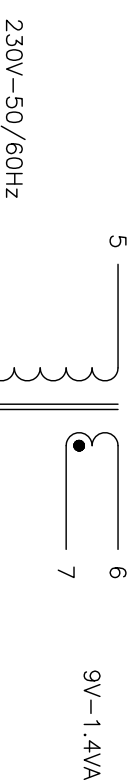

Finitions:		Tolérance générale:
Entonnoir:		General tolerance:

Ech:	1:1	Matière:	
Material:			
Dessiné par:	ROUSSEL.Ch	Date:	18/05/2004
Visé:	J.P.M.		

DATA SHEET 44704
EI 30X18



22, Allée du Clos des Champs
 Z.A. Les Portes de la Forêt
 77090 COLLEBIEN
 Tél : 01-60-57-55-55
 Fax : 01-60-17-12-00

DS44704

Rev	Date	Modification	Dessiné	Visé
A	21/6/16	Marking updated	SCOTT	J.P.M
B				
C				
D				