

**SAFETY ISOLATING TRANSFORMER**

POWER : 6VA  
 INPUT VOLTAGE : 2x115V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x9V

**NON SHORT CIRCUIT PROOF TRANSFORMER**


IPO0  
 UL94HB  
 OPERATING TEMPERATURE : -25°C to 70°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : 315mA FUSE ON EACH SECONDARY

**STANDARDS :**

UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

**CONFORM TO :**

EN61558-1  
 EN61558-2-6

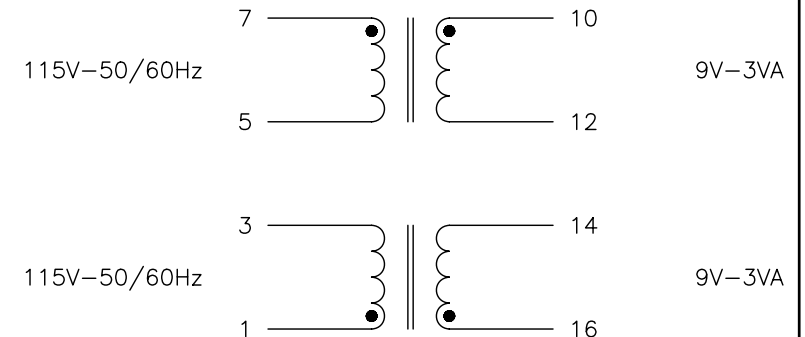

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par: ROUSSEL.Ch	Date: 19/09/2005	Visa:	J.P.M.

**DATA SHEET 45026**  
**UI 30x10.5**

22 Allée du Clos des Charmes  
 Z.A. Les Portes de la Forêt  
 77090 COLLEGIEN  
 Tel : 01-60-37-55-55  
 Fax : 01-60-17-12-00

**DS45026**

Rev	Date	Modification	Dessiné	Visa