

**SAFETY ISOLATING TRANSFORMER**

POWER : 6VA  
 INPUT VOLTAGE : 2x115V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x12V

**NON SHORT CIRCUIT PROOF TRANSFORMER**


IPO0  
 UL94HB  
 OPERATING TEMPERATURE : -25°C to 70°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : 250mA FUSE ON EACH SECONDARY

**STANDARDS :**

UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

**CONFORM TO :**

EN61558-1  
 EN61558-2-6

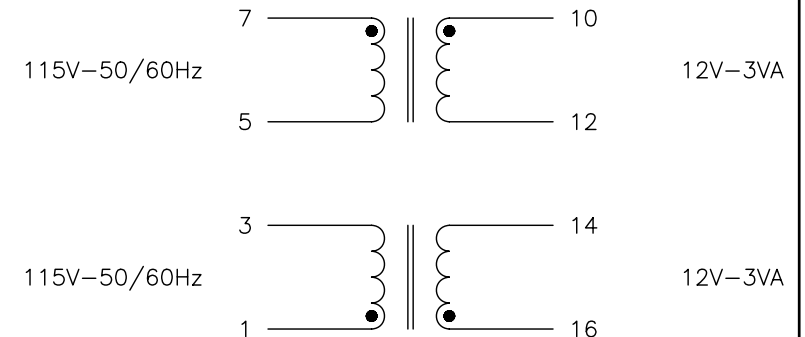

| Rev | Date | Modification | Dessiné | Visa |
|-----|------|--------------|---------|------|
| D   |      |              |         |      |
| C   |      |              |         |      |
| B   |      |              |         |      |
| A   |      |              |         |      |

|                         |                  |  |  |
|-------------------------|------------------|--|--|
| Finition:               |                  | Tolérance générale:  |  |
| Finition:               |                  | General tolerance:   |  |
| Ech: 1:1                | Matière:         |  |  |
|                         | Material:        |  |  |
| Dessiné par: ROUSSEL.Ch | Date: 19/09/2005 | Visa: J.P.M.   |  |
| <b>DATA SHEET 45027</b> |                  |  |  |
| <b>UI 30x10.5</b>       |                  |  |  |
|                         |                  | 22 Allée du Clos des Charmes<br>Z.A. Les Portes de la Forêt<br>77090 COLLEGIEN<br>Tel : 01-60-37-55-55<br>Fax : 01-60-17-12-00 |  |
|                         |                  | <b>DS45027</b>   |  |