

SAFETY ISOLATING TRANSFORMER

POWER : 6VA
 INPUT VOLTAGE : 2x115V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 2x15V

NON SHORT CIRCUIT PROOF TRANSFORMER


IPO0
 UL94HB
 OPERATING TEMPERATURE : -25°C to 70°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 REQUIRED PROTECTION : 200mA FUSE ON EACH SECONDARY

STANDARDS :

UL506 (File E111078)
 CSA 22-2 (File E111078)
 CE

CONFORM TO :

EN61558-1
 EN61558-2-6

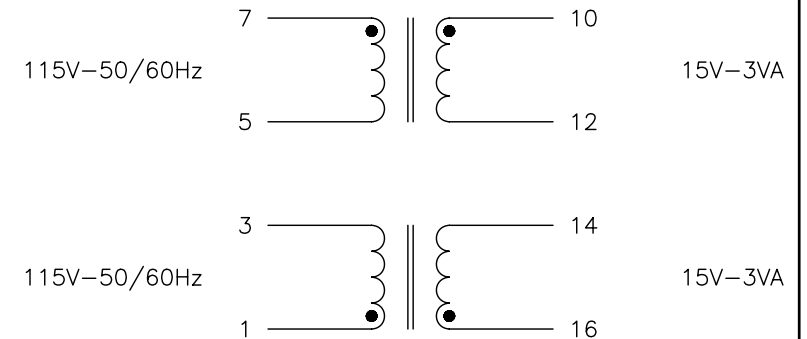

| Rev | Date | Modification | Dessiné | Visa |
|-----|------|--------------|---------|------|
| D | | | | |
| C | | | | |
| B | | | | |
| A | | | | |

| | | | |
|--------------------------------|------------------|--|---------|
| Finition: | | Tolérance générale: | |
| Finition: | | General tolerance: | |
| Ech: 1:1 | Matière: | | |
| | Material: | | |
| Dessiné par: ROUSSEL.Ch | Date: 19/09/2005 | Visa: J.P.M. | |
| DATA SHEET 45028 UI 30x10.5 | | | |
| | | 22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGIEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00 | DS45028 |