

myrra 45039  
 www.myrra.com  
 CE  
 115V 50/60Hz (1-4)  
 115V 50/60Hz (9-6)  
 125mA (115V)  
 63mA (230V)  
 12V 5VA (12-14)  
 12V 5VA (19-17)  
 ① ④ ta 50/B ⑥ ⑨

Rev	Date	Modification	Dessiné	Visa
D				
C				
B				
A				

SAFETY ISOLATING TRANSFORMER


POWER : 10VA  
 INPUT VOLTAGE : 2x115V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x12V

NON SHORT CIRCUIT PROOF TRANSFORMER

IPO0  
 UL94HB  
 OPERATING TEMPERATURE : -25°C to 50°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : ON PRIMARY 125mA (115V)  
 63mA (230V)

STANDARDS :  
 UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

CONFORM TO :  
 EN61558-1  
 EN61558-2-6

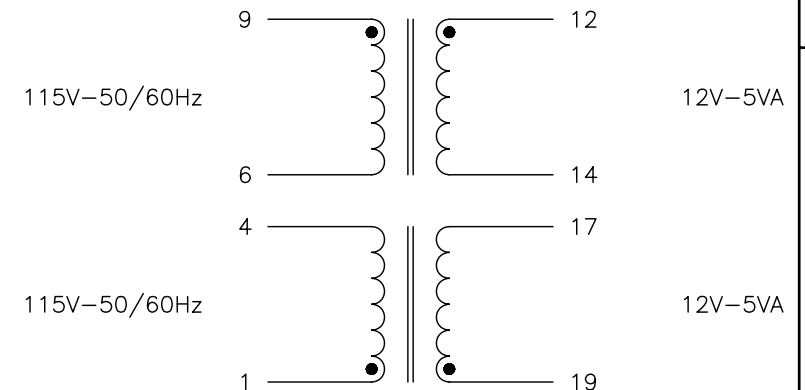

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par: ROUSSEL.Ch	Date: 20/09/2005	Visa: J.P.M.	
<b>DATA SHEET 45039</b>			
<b>UI 39x8</b>			
		22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGIEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	<b>DS45039</b>