

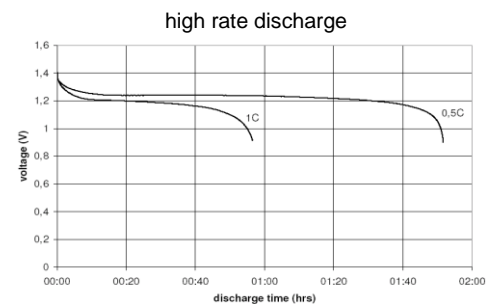
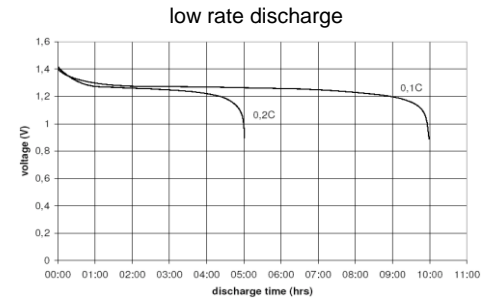
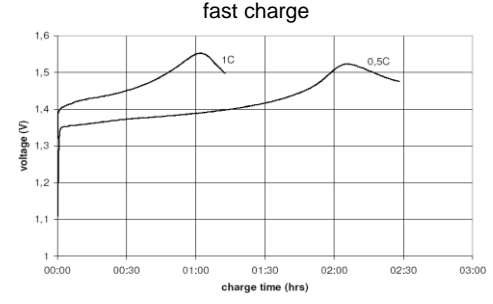


		Conditions	
cell type:		NiMH	
cell size:		AAA	
nominal voltage:	1.2	V	
max. charge voltage:	1.5	V	
at standard charge (0.1C / 20°C)			
capacity			
nominal:	550	mAh	discharge at 0.2C
minimum:	550	mAh	discharge at 0.2C
	500	mAh	discharge at 1C
1.0V end discharge voltage			
ta: 20°C			
max. continuous discharge current:	1650	mA	ta: 0...45°C
charge		current	time
standard charge:	55	mA	14...16hrs
quick charge:	170	mA	4hrs
fast charge:	550	mA	1.1hrs
recommended charge termination control parameters:	0...5	mV	- ΔV (-deltaV)
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	5...15	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 55	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 50	mΩ	at 1KHz battery fully charged
life expectancy:	≥ 500	cycles	acc. IEC standard
self discharge			
charge retention:	≥ 80	%	after 12 months storage at 20°C
initial capacity:	≥ 400	mAh	within 30 days after delivery discharge at 0.2C
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	0...45	°C	discharge (≥1C)
	- 20...65	°C	discharge (<1C)
	- 20...50	°C	storage (≤3months)
	- 20...40	°C	storage (≤6months)
	- 20...30	°C	storage (≤24months)
QCT1:	20/500/50		
QCT2:	30/450/55		

Diagrams

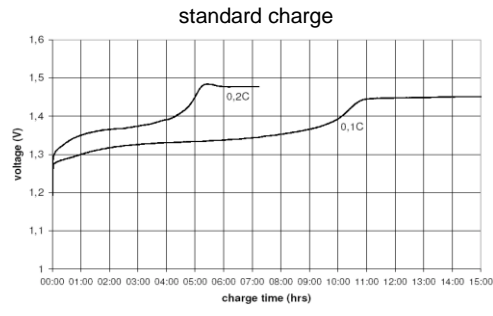

mechanical specifications			
cell dimensions			
diameter d1:	max.	10.5 - 0.7	mm
diameter d2:	max.	3.8	mm
height h1:	min.	44.5 - 1.5	mm
height h2:	min.	0.8	mm
weight:		11.5 ± 2	g



	ANSMANN Specifications for model:	AAA - 550mAh low self discharge bulk package
	data sheet no. / part no.	5030771
	supplier no.	702069
	author / date	Gramlich / 06.02.2012

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice