

D-SUB High Density, Right Angled

Series

599



Rated current	3,0 A
Rated voltage	60 VRMS / VDC
Withstand voltage	500 VRMS for 1 minute
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Operating temperature	-55°C to +85°C
Max. processing temper.	230°C for 10 seconds


termination



max. pincount
062

All dimensions in mm.


Variation / PCB Layout

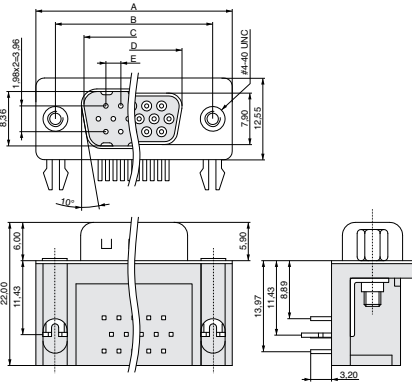


3

Mounting option


M1




N1




N6




NB



Female



Male



n	no. of contacts						
	A	B	C	D	E	F	
015	30,81	24,99	16,92	16,33	2,29	0,25	
026	39,14	33,32	25,50	24,66	2,29	0,51	
044	53,04	47,04	38,96	38,38	2,29	0,51	
062	69,32	63,50	55,42	54,84	2,41	0,58	

Type:
F = Female
M = Male

Colour:
0 = Black
3 = Blue

Plating shell:
N = Ni

Plating contact:
T = Sn
F = Au
S = Selective Au

Variation

No. of contacts

Type (F,M)

Mounting option (M1,N1,...)

Colour (0,3)

Plating shell

Plating contact (T,...)



www.mpe-connector.de

CS59412_V3

Order code: 599-3-2222-2-N2-BS0