

**Motor GM12-N20VA-08220-298-20M3** Art.-Nr.: 860507

**Specification :**


Item	Unit	Specification
Rated voltage	V <sub>DC</sub>	6.0
Gear Ratio		1/298
Rotation		CW
Motor Position		All position in horizontal
Temperature	°C	0~30
Humidity	%	30~95
<b>• Performance of Motor</b>		
No-load Speed	rpm	16.000±10%
No-load Current	mA	35 (max.)
Stall Current	mA	600 (max.)
Stall Torque	g.cm	10
<b>• Performance of Gear motor</b>		
Output Speed	rpm	55±10%
No-load Current	mA	50 (max.)
Stall Current	mA	600 (max.)
Stall Torque	kg.cm	3
Rated Torque	g.cm	750
Rated Current	mA	150 (max.)
Noise	dB	50
<b>• The Dimension</b>		
The Outside Shaft Length	mm	20
Shaft End Play	mm	0.05-0.30
Screw Size		M1.6*0.35
Dia of Shaft	mm	M3 threaded shaft

**Motor GM12-N20VA-08220-298-20M3**

Art.-Nr.: 860507

**Dimensions :**

(Unit : mm)

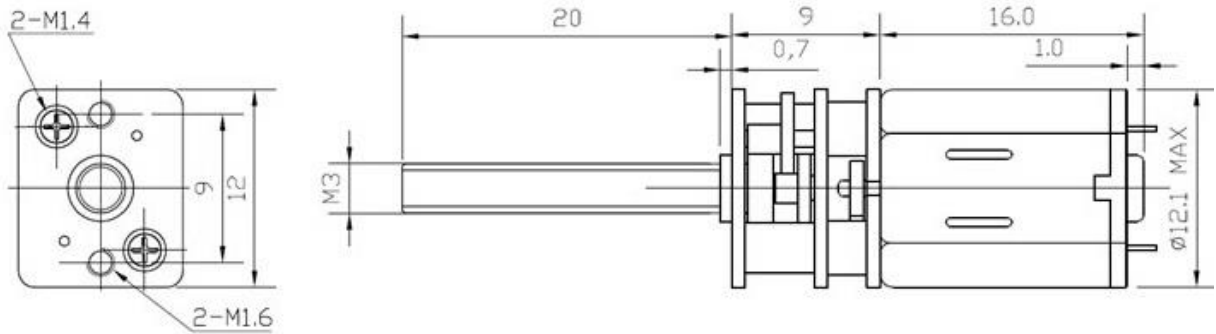

**Curve Drawings :**

