



# FEMALE HEADERS

## Female header


Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Phosphor bronze
Rated current:	3 Amp.
Rated voltage:	150 V <sub>RMS</sub> /V <sub>DC</sub>
Withstand voltage:	500 V <sub>RMS</sub> for one minute
Operating temperature:	-40°C to +105°C
Max. soldering temp.:	260°C for 10 seconds

pitch	rows	row distance	orientation	termination
2,54	1		straight	through hole

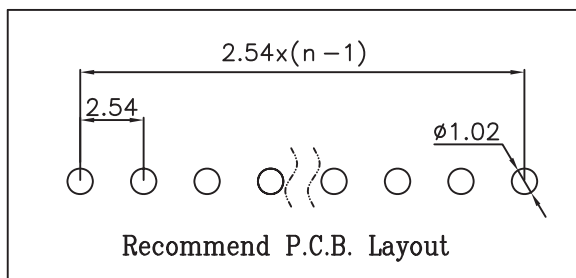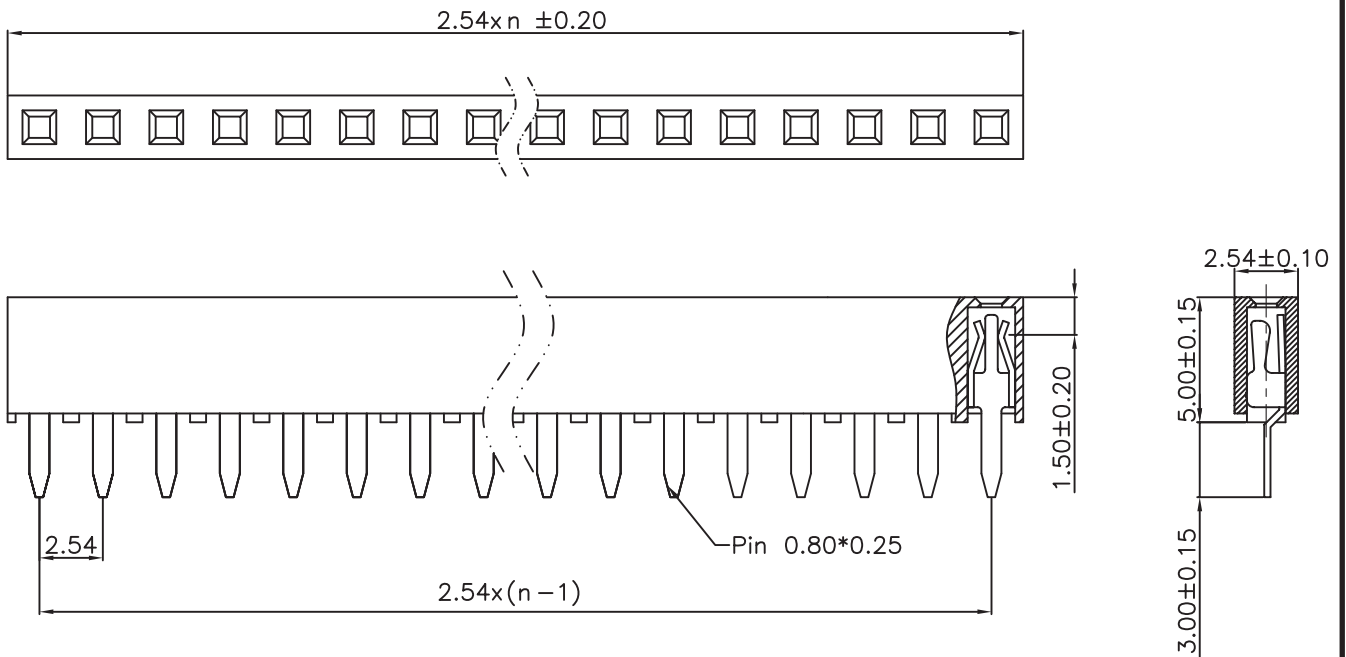

n = No. of contacts



Order code: **904-1-020-0-NFX-XS0-0-0-0-0A79**

Part No.: **12050100066**

CS211011\_V1\_4