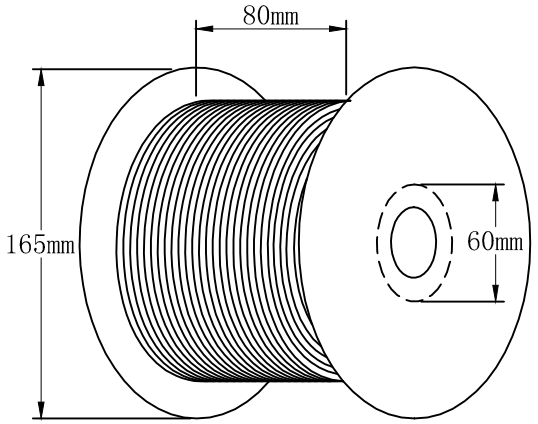

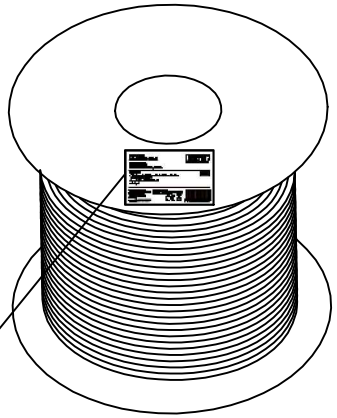

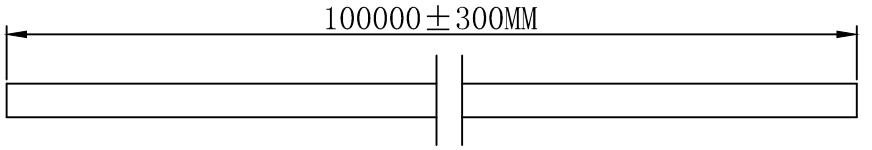

1 ORANGE 2 WHITE 3 BROWN 4 GREEN

Wire section

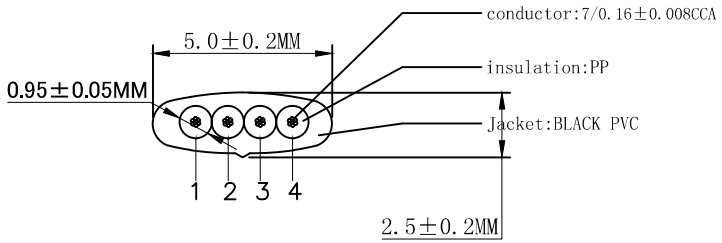

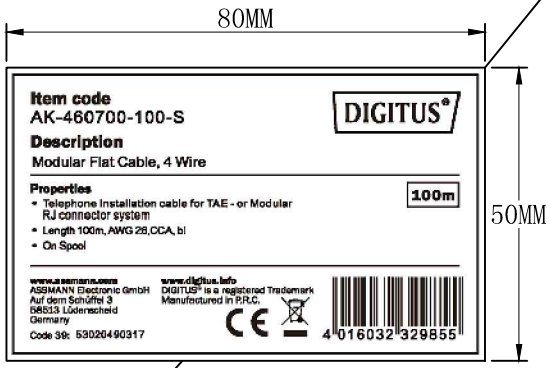

LABEL 1

([Meter]-Marking 001m, 002m, 003m …100m)

Printing: (Printed white word)

DIGITUS® Telephone Cable AWG26 4-wire CPR Eca CE [Meter]

; Assmann Electronic GmbH, 58513 Lüdenscheid, Germany

EAN:
4016032329855

NOTES:

1. Cable: 26AWG*4C CCA Conductor, OD:(2.5±0.2mm)*(5.0±0.2mm)
2. Label WITH BACKGROUD WITH BLACK TEXT:L80*W40mm
3. PACKING:100M/PLASTIC SPOOL,4PCS/OUTER CARTON
4. Percentage of copper used for CCA wires:8%

Resistance max:385Ω/KM
Insulation material:PP,sheath material:PVC BLACK
Resistance of isolation:≧500MΩ.m
Range of working temperature:-20 to +60℃
Operating temperature:-20 to +60℃
Operating Humidity:40%~65%
Storage temperature:-20 to +60℃
Storage Humidity:45%~65%

LABEL 2

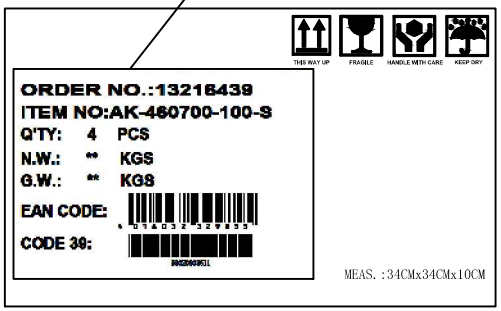

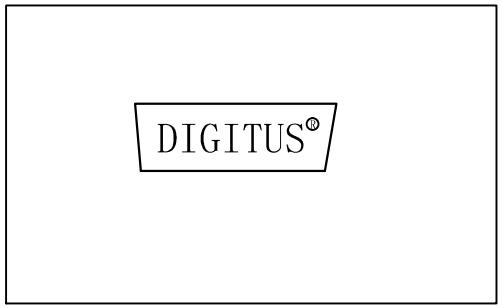

FRONT MARK

SIDE MARK

	Date	Name
Drawn by	2019.11.25	Jerry
Checked by	2019.11.25	Frack
Approved by		

ASSMANN Electronic GmbH

86363

Part No.

AK-460700-100-S

EAN: 4016032329855

Title

MODULAR FLAT CABLE 100M BLACK

Scale	N/A	Sheet
Unit	MM	1/1