


## FEMALE HEADERS


## Female header

## Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Copper Alloy
Rated current:	1,5 Amp.
Rated voltage:	100 V <sub>RMS</sub> /150 V <sub>DC</sub>
Withstand voltage:	min. 500 V <sub>RMS</sub>
Operating temperature:	-40°C to +105°C

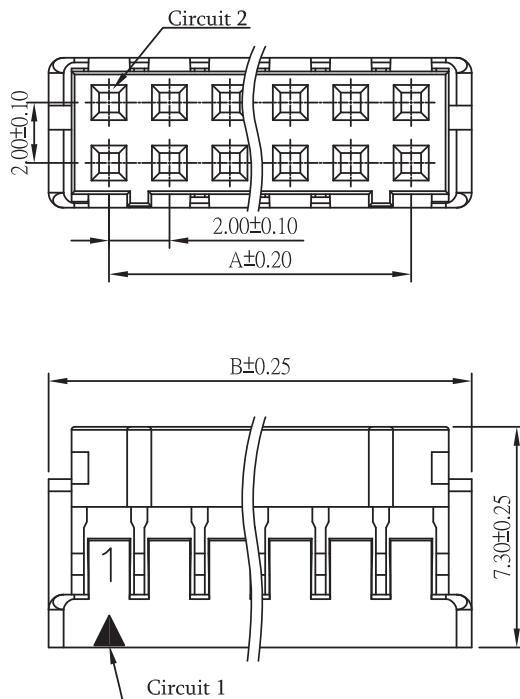

Pincount	Dimensions	
	A	B
004	2.00	6.00
006	4.00	8.00
008	6.00	10.00
010	8.00	12.00
012	10.00	14.00
014	12.00	16.00
016	14.00	18.00
018	16.00	20.00
020	18.00	22.00
022	20.00	24.00
024	22.00	26.00
026	24.00	28.00
028	26.00	30.00
030	28.00	32.00
032	30.00	34.00
034	32.00	36.00
036	34.00	38.00
038	36.00	40.00
040	38.00	42.00

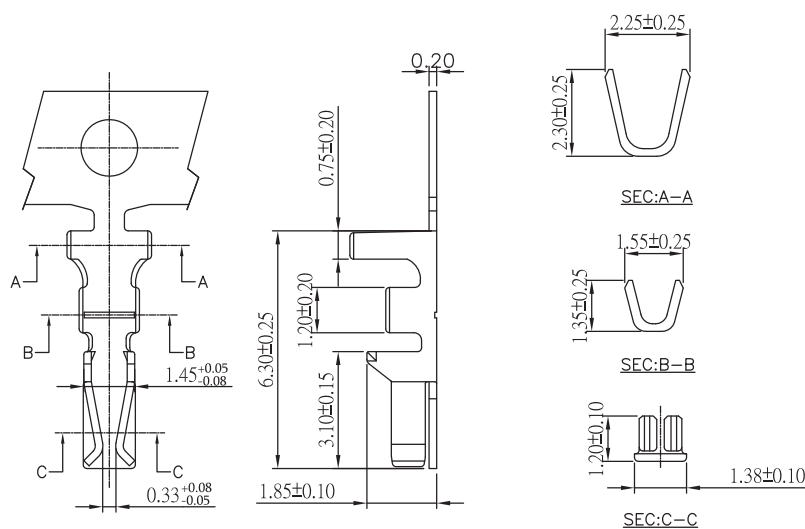

Please order separately:

Crimpcontact

**CC2-22/30-TT-RL**

Plating: Tin

Packsize: 10.000 per Reel

Pincount: see table

Order code:

**906-2-XXX-X-BS0A10**