


Drawing No. : 1027343
 created: SBR 04/10/2016 11:19:00

Page 1 / 1

Typ : ATBIG2,203510030

RoHS Compliant

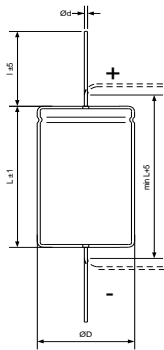

Ø D : 10 mm
 L : 30 mm
 l : 45 mm
 d : 0,8 mm

Bipolar construction

Terminals : Wire

Electrical Parameters

Rated Capacitance (C _R) @ 1000Hz / 20 °C	2,2 μF	
Tolerance	±5 %	
Rated Voltage (U _R)	35 Vac	
Tan δ typ. @ 1000 Hz / 20°C	5 %	
Useful life @ I _R , U _R , 85 °C	5000 h	
IEC Climatic category / Standards	40/085/56	IEC 60384-4
Applications	audio frequency	