


Typ : ATBIG3,303510030

RoHS Compliant

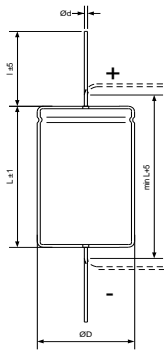

$\varnothing D$: 10 mm
 L : 30 mm
 l : 45 mm
 d : 0,8 mm

Bipolar construction

Terminals : Wire

Electrical Parameters

Rated Capacitance (C_R) @ 1000Hz / 20 °C	3,3 μ F	
Tolerance	± 5 %	
Rated Voltage (U_R)	35 Vac	
Tan δ typ. @ 1000 Hz / 20°C	5 %	
Useful life @ I_R , U_R , 85 °C	5000 h	
IEC Climatic category / Standards	40/085/56	IEC 60384-4
Applications	audio frequency	