REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

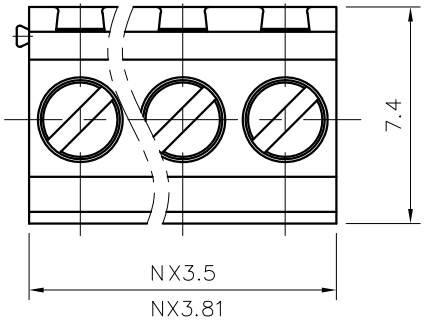

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 10A
2.Torque Value : M2 , 1.77Lb.in
3.Wire Range : 26~16AWG

IEC Standard

1.Rated voltage/current : 130V / 10A
2.Torque Value : M2 , 0.2N.m
3.Wire Range : 0.5~1.0mm^2

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 3.5/3.81mm, Poles : N=02~24P
3.Stripping length : 4~5mm
4.Withstanding voltage : AC1250V/1Min
5.Operating temperature: -40°C~+105°C
6.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					– ∩ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

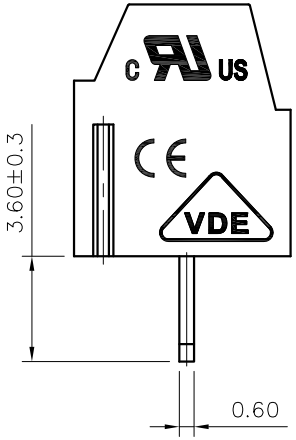

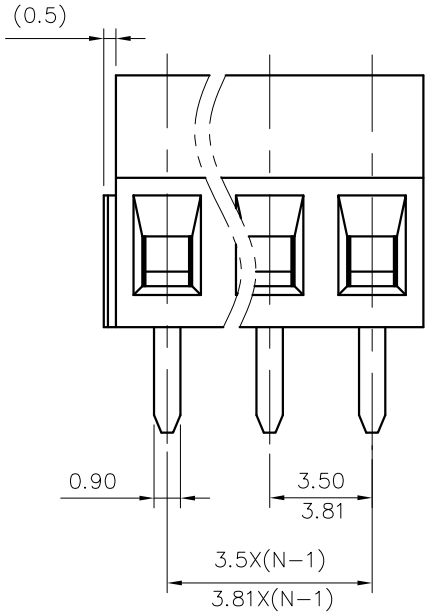

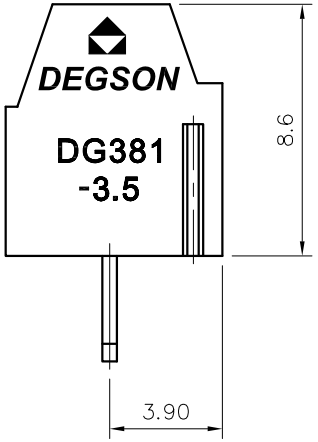

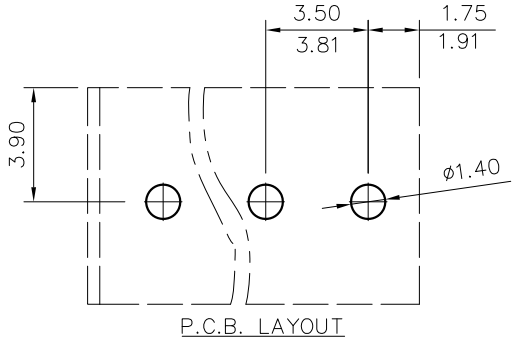

DG381 – 3.5/3.81 – XXP – 1Y – 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) (RoHS)

00A–(Standard)

(Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: /	NAME: DG381-3.5/3.81-XXP-1Y-00A(H)	
	CHKD: /		
	DRFT: /	TITLE: CUSTOMER DRAWING	REV D0
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET 1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE 1:1