

AAA size

eneloop
Ready to use Rechargeable Battery TM



Specifications

Model		BK-4MCDE
Type		AAA size consumer type
Country origin		Japan
Capacity (minimum) ¹⁾		800 mAh
Nominal Voltage		1.2V
Charging Current		Fast Charge ²⁾
		Max. 800 mA
Ambient Temp.	Charge	0°C - 40°C
	Discharge	-20°C - 50°C
	Storage	Less than 90 days
Less than 1 year		-20°C - 30°C
Internal impedance (after discharge to E.V.=1.0V) ³⁾		Approx. 40mΩ (at 1000Hz)

1) Single cell capacity under the following condition.


Charge : 80mA×16h, Discharge : 160mA(E.V.=1.0V) at 25°C

2) Use recommended charging system. 3) After a few charge and discharge cycles under the above 1) condition.

Cell size, weight with tube

Dimensions	D	10.5mm
	H	44.5mm
Weight	Approx. 13g	


10.5mm

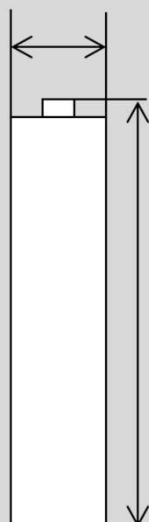

44.5mm

Typical Characteristics

Charge

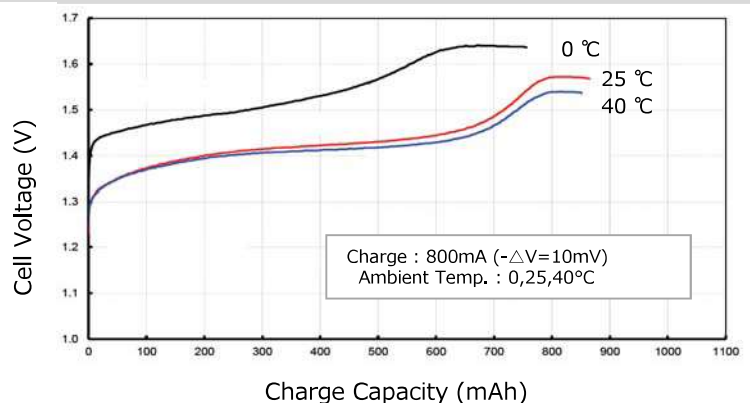

Discharge

