


PART 2

29±0.1MM



3.15MM

**PART1
(RED)**

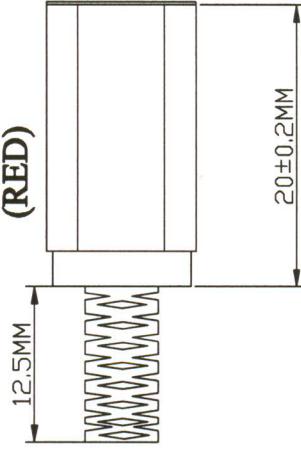



12.5MM

Technical parameters:
 Temperature: -25~+70 °C
 Withstand Voltage: AC 250V
 (50Hz) min
 Rated load: DC 50V 0.5A
 Insertion and Extraction Force: 3~25N
 Contact Resistance: $\leq 0.015 \Omega$
 Life: 1000
 Insulation Resistance: $\geq 100M \Omega$

20±0.2MM

6.8MM

A	REV	ECN NO	ISSUE DESCRIPTION	2014.6.25 DATE
 Ledino Deutschland GmbH <small>the energy saving company</small>				
DESCRIPTION				
GENERAL TOLERANCE		CUS P/N: DR		DRAWING
X.	±0.30 X°	±2.0°	PART NO: CS 1 R	CHECKED
.X	±0.20 .X°	±1.0°	DRAWING NO:	APPROVED
.XX	±0.10 .XX°	±0.5°		
THIRD ANGLE PROJECT			SCALE	SHEET
			NONE	1/1
			UNIT	REV
			MM	A