

**Specification Status: Released**

**Electrical Rating**

**Voltage: 72V MAX**  
**Current: 40A MAX**

**Insulating Material:**


Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements

**Lead Material:**

20 AWG Tin Plated Copper

**Marking:**

- ⊗ 72 — Manufacturer's Mark and Voltage
- XF375 — Part Identification
- □ □ □ — Lot Identification (can be on back)

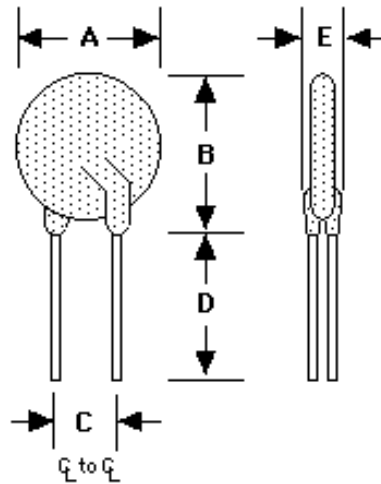

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	27.2	--	31.8	9.4	10.9	7.6	--	--	3.0
in*:	--	(1.07)	--	(1.25)	(0.37)	(0.43)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C		SECONDS AT 20°C, 18.75A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
			MIN	MAX			
3.75	3.75	7.50	0.03	0.05	24.0	0.08	3.2

Agency Recognitions:

UL, CSA, TUV.

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

