



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDF-511-034 REV: 1.0

0.56" Quadruple Digit Displays

MODEL NO : ELF-511SURWA/S530-A2 ECN : _____ Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Description :

- The ELT-511 series is a large 14.22mm (0.56")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light.
- These device is made with white segments and gray surface.

| PART NO | CHIP | | C.C. or C.A. |
|----------------------|----------|---------------|--------------|
| | Material | Emitted Color | |
| ELF-511SURWA/S530-A2 | AlGaInP | Hyper Red | C.C. |

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDF-511-034 REV: 1.0


0.56" Quadruple Digit Displays

MODEL NO : ELF-511SURWA/S530-A2 ECN : _____ Page: 2/5

■ Package Dimension:

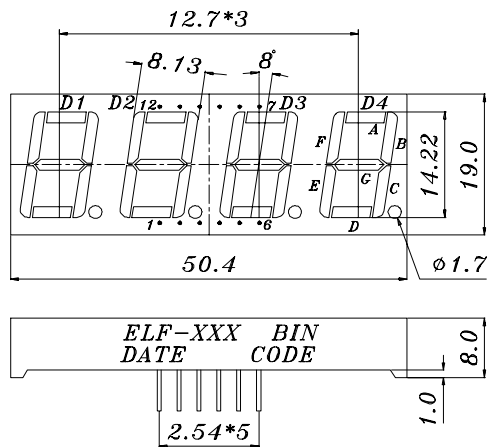

- COMMON CATHODE*
- 1 ANODE E
 - 2 ANODE D
 - 3 ANODE DP
 - 4 ANODE C
 - 5 ANODE G
 - 6 COMMON CATHODE D4
 - 7 ANODE B
 - 8 COMMON CATHODE D3
 - 9 COMMON CATHODE D2
 - 10 ANODE F
 - 11 ANODE A
 - 12 COMMON CATHODE D1

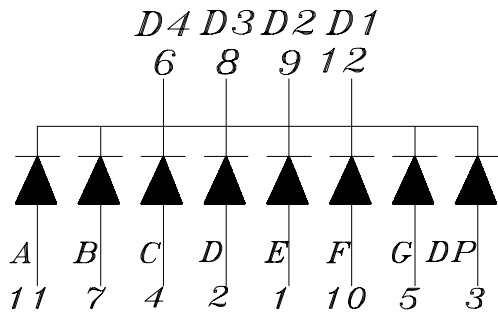

■ NOTES:

1. All dimensions are millimeters, tolerance is 0.25mm unless otherwise noted.
 2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



0.56" Quadruple Digit Displays

■ Absolute maximum ratings at Ta = 25°C :

| Parameter | Symbol | Rating | Unit |
|--|----------|-------------|------|
| Reverse Voltage | Vr | 5 | V |
| Forward Current | If | 25 | mA |
| Operating Temperature | Topr | -40 to +85 | °C |
| Storage Temperature | Tstg | -40 to +100 | °C |
| Soldering Temperature | Tsol | 260 ± 5 | °C |
| Electrostatic Discharge | ESD | 2000 | V |
| Power Dissipation | Pd | 60 | mW |
| Peak Forward Current(Duty 1/10 @ 1KHZ) | If(Peak) | 160 | mA |

■ Electronic optical characteristics :

| Parameter | | Symbol | MIN. | TYP. | MAX. | Unit | Condition |
|------------------------------|-------------|--------|-------------------|------|------|------|-----------|
| Luminous | Per segment | Iv | 0.75 | 2.1 | ---- | mcd | If=2mA |
| | Intensity | | Per decimal point | 5.60 | 14.2 | ---- | mcd |
| Intensity | | | point | 0.28 | 0.75 | ---- | mcd |
| | 2.80 | | | 5.60 | ---- | mcd | If=10mA |
| Peak Wavelength | | λ p | ---- | 632 | ---- | nm | If=20mA |
| Dominant Wavelength | | λ d | ---- | 624 | ---- | nm | If=20mA |
| Spectrum Radiation Bandwidth | | △ λ | ---- | 20.0 | ---- | nm | If=20mA |
| Forward Voltage | | Vf | ---- | 2.0 | 2.4 | V | If=20mA |
| Reverse Current | | Ir | ---- | ---- | 10 | μ A | Vr=5V |



Device Number :

DDF-511-034

REV:

1.0

0.56" Quadruple Digit Displays

MODEL NO:




ELF-511SURWA/S530-A2

ECN :

Page:

4/5

■ Typical Electro-Optical Characteristic Curves:

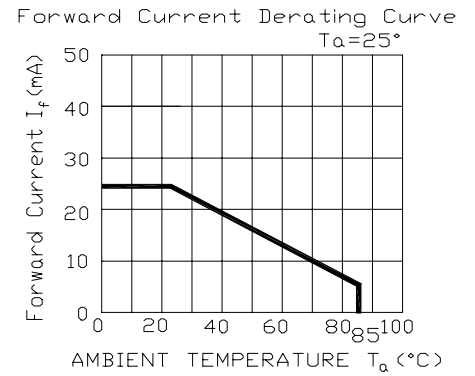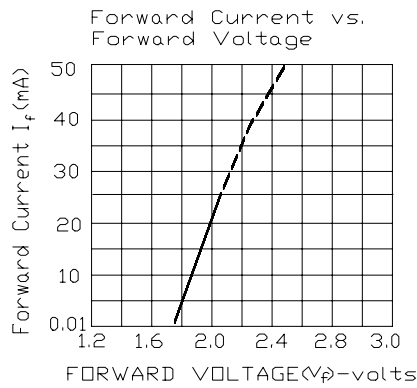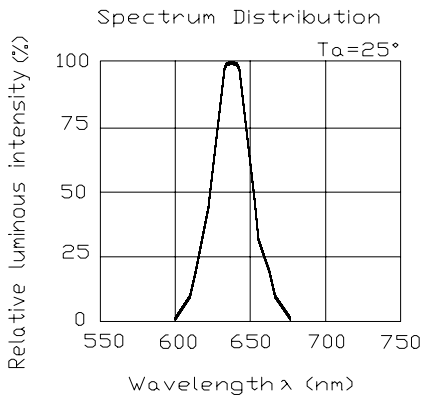



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDF-511-034

REV: 1.0

0.56" Quadruple Digit Displays

MODEL NO : ELF-511SURWA/S530-A2

ECN :

Page: 5/5

■ Reliability test item and condition:

| NO | Item | Test Conditions | Test Hours/Cycle | Sample Size | Ac/Re |
|----|----------------------------------|---|------------------|-------------|-------|
| 1 | Solder Heat | TEMP : 260°C ± 5 °C | 5 SEC | 76 PCS | 0/1 |
| 2 | Temperature Cycle | H : +85°C 30min ∫ 5 min L : -55°C 30min | 50 CYCLE | 76 PCS | 0/1 |
| 3 | Thermal Shock | H : +100°C 5min ∫ 10 sec L : -10°C 5min | 50 CYCLE | 76 PCS | 0/1 |
| 4 | High Temperature Storage | TEMP : 100°C | 1000 HRS | 76 PCS | 0/1 |
| 5 | Low Temperature Storage | TEMP : -55°C | 1000 HRS | 76 PCS | 0/1 |
| 6 | DC Operating Life | If = 10 mA | 1000 HRS | 76 PCS | 0/1 |
| 7 | High Temperature / High Humidity | 85°C/85% RH | 1000 HRS | 76 PCS | 0/1 |

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
|--|--|--|--|--|--|