
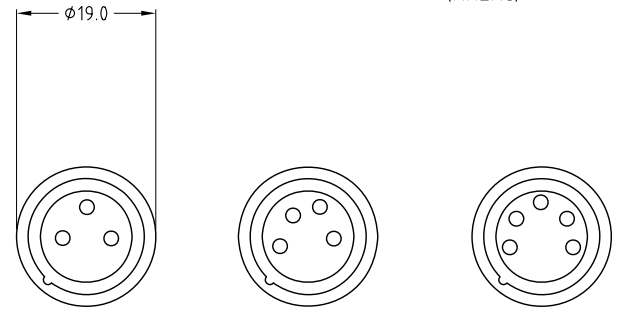


ISS.	AMEND	DATE
1	1st DRAWN	9/7/03

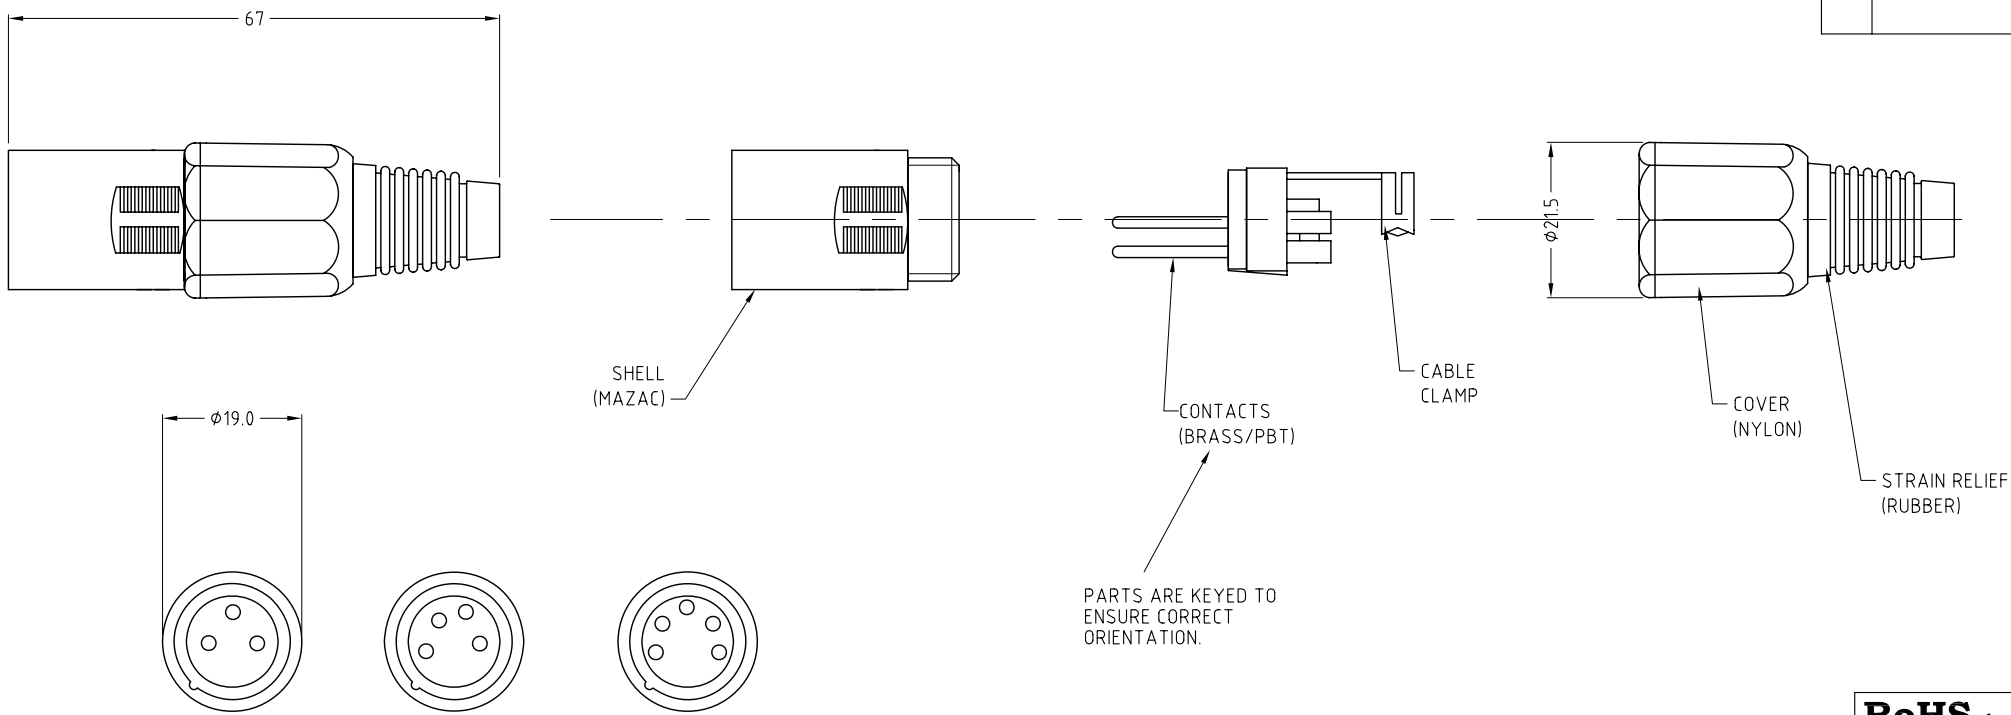

3APM/M FC6130 4APM/M FC6155 5APM/M FC6160

SPECIFICATION						
MODEL	I(A) MAX @25°C	MAX CABLE	C (Pf)	Cr mΩ (MATED)	IR Ω @ 500V	PROOF V 1 MIN
FC6130	16	2.5	<4	<3	>10 ⁶	1500
FC6155	10	1.0	<7	<3	>10 ⁶	1500
FC6160	7.5	1.0	<7	<3	>10 ⁶	1500

RoHS
COMPLIANT

TOLERANCE
 NO DEC. PLACE ± 0.50
 1 DEC. PLACE ± 0.20
 2 DEC. PLACE ± 0.10
 HOLE DIA. ± 0.10
 ANGLES ± 1/2°
 UNLESS OTHERWISE STATED

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. DO NOT SCALE DRAWING. 3rd ANGLE PROJECTION. REMOVE ALL BURRS. IF IN DOUBT ASK.

WHERE USED F.R. SCALE N.T.S.

Cliff Electronic Components Ltd.
 76 Holmethorpe Ave., Holmethorpe Ind. Estate,
 Redhill, Surrey, RH1 2PF, England
 Tel: 01737-771375 Fax: 01737-766012

MATERIAL	COMPOSITE / CONTACTS SILVER PLATED 2μ MIN
FINISH	CLEAN
DRAWN	CAMJ
APPD.	RWT

TITLE	XLR PLUG (MALE) XAPM/M
DRWG. No.	FC 6130
FORM:	A4DRWGH