



ISS.	AMEND	DATE
1	1st DRAWN	9/7/03

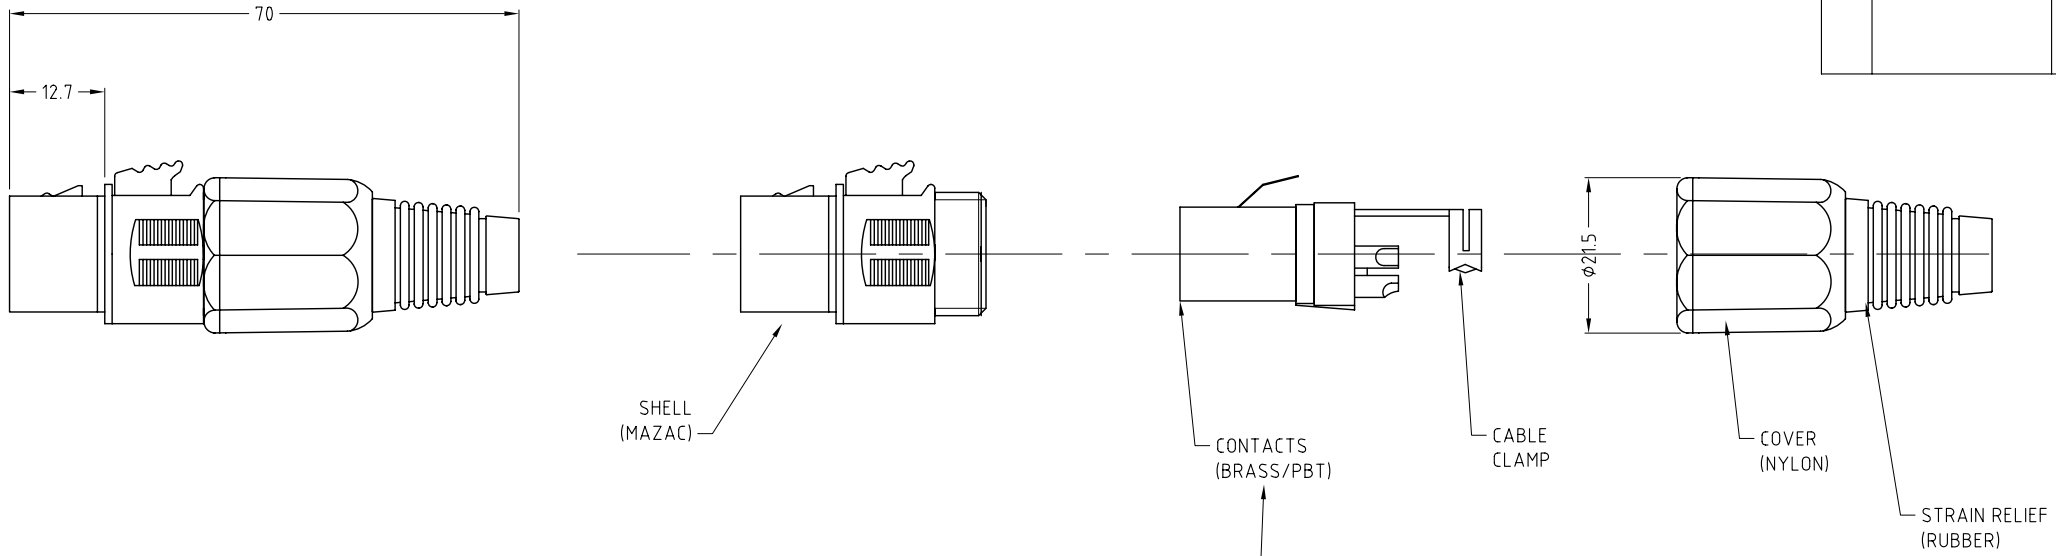

PARTS ARE KEYED TO ENSURE CORRECT ORIENTATION.

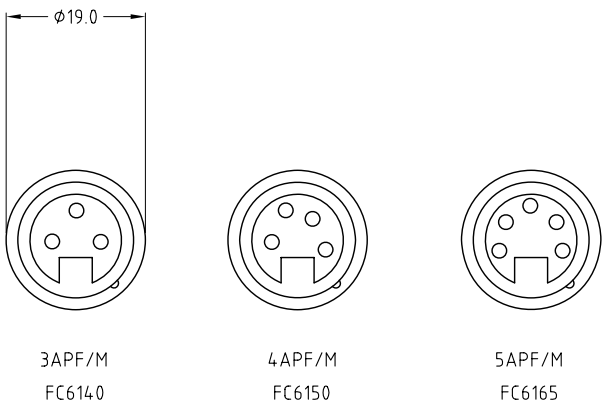

SPECIFICATION						
MODEL	IA MAX @25°C	MAX CABLE	C (Pf)	Cr mΩ (MATED)	IR Ω @ 500V	PROOF V 1 MIN
FC6140	16	2.5	<4	<3	>10 <sup>6</sup>	1500
FC6150	10	1.0	<4	<3	>10 <sup>6</sup>	1500
FC6165	7.5	1.0	<4	<3	>10 <sup>6</sup>	1500

**RoHS COMPLIANT**

TOLERANCE  
 NO DEC. PLACE ± 0.50  
 1 DEC. PLACE ± 0.20  
 2 DEC. PLACE ± 0.10  
 HOLE DIA. ± 0.10  
 ANGLES ± 1/2°  
 UNLESS OTHERWISE STATED

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. DO NOT SCALE DRAWING. 3rd ANGLE PROJECTION. REMOVE ALL BURRS. IF IN DOUBT ASK.

WHERE USED F.R.  
SCALE N.T.S.

<b>Cliff Electronic Components Ltd.</b> 76 Holmethorpe Ave., Holmethorpe Ind. Estate, Redhill, Surrey, RH1 2PF, England Tel: 01737-771375 Fax: 01737-766012	MATERIAL	COMPOSITE / CONTACTS SILVER PLATED 2µMIN		TITLE	XLR PLUG (FEMALE) XAPF/M	
	FINISH	CLEAN		DRWG. No.	FC 6140	
	DRAWN	CAMJ	APPD.	RWT	FORM: A4DRWGH	