

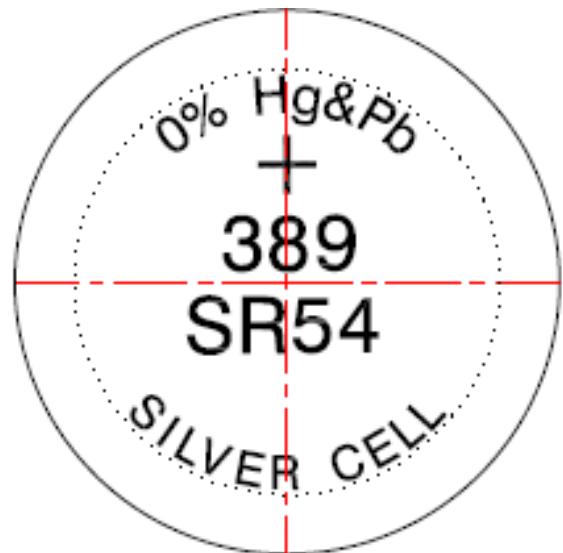


Model No.: **GP389F**

Typical Discharge curve at 20±3°C

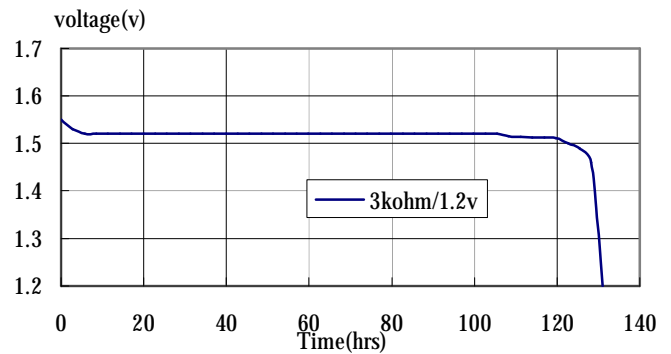

|                          |   |
|--------------------------|---|
| Description              | : Mercury and Lead Free Alkaline Battery  |
| Chemical System          | : Zinc/Silver Oxide   |
| Nominal Voltage          | : 1.55V   |
| Nominal Dimension        | : $\Phi$ 11.60mm×3.05mm   |
| Applications             | : Analog watch  |
| Average Weight           | : 1.10 g  |
| Shelf Life               | : Not less than 90% of the service capacity within first year, Not less than 85% of the service capacity within second year storage at 20 ± 2°C Max 85 %RH. |
| Date Code                | : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.  |
| Close Circuit Voltage    | : 1.30 V (min.) (load resistor 200 $\Omega$ at 20±2°C for 0.1 to 2 seconds)   |
| Nominal Service Life     | : 130hrs (load 3 k $\Omega$ to cut off 1.2V under 20±2°C)   |
| Average Service Capacity | : 70mAh (load 3k $\Omega$ to cut off 1.2V under 20±2°C)   |

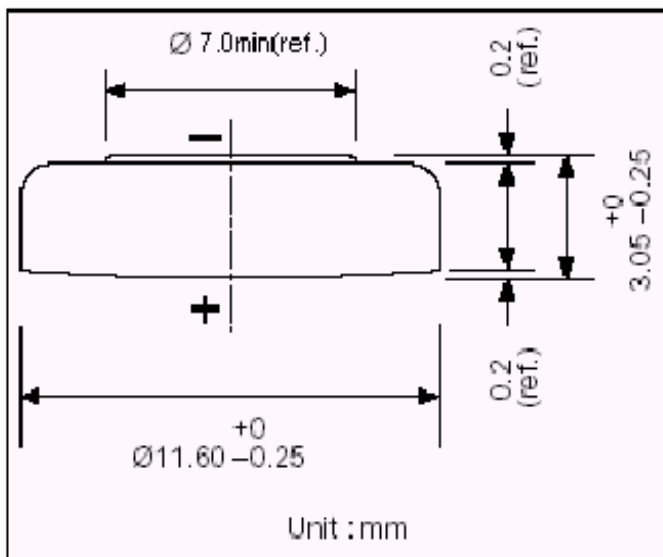

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.