


Notes and materials:

Body	Nylon PA66 UL 94V-0
Terminals	CuZn, Sn plated
Cable	110 ± 10mm, 16 AWG (1.3mm <sup>2</sup> ) red wire
Connector	PVC butt connector, min. 15KG pull-out force
Current rating	Max. 10 Amp for additional circuit
Fuse series	F1500 series normOTO fuse, see table

F1500 series normOTO blade fuse ref. table:

Rating [ A ]	Color	Volt [ V ]	iMaXX Reference
3	Violet	32	F1503
4	Pink	32	F1504
5	Tan	32	F1505
7.5	Brown	32	F1575
10	Red	32	F1510
15	Blue	32	F1515
20	Yellow	32	F1520
25	Natural	32	F1525
30	Green	32	F1530
35	Dark Green	32	F1535
40	Orange	32	F1540

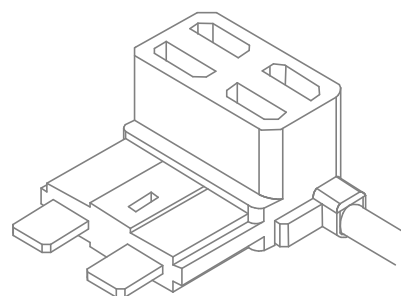

Revisions			Date	Appr.
	Date	Type	Drawn	02/09
a	09/11	updated dimensions	Checked	05/17
b	05/13	updated tables	Standards	
c	05/17	updated notes and materials table	Approved	05/17
				AdH
			Scale	not to scale
			Projection	Tolerance ± 0.2 mm unless otherwise noted
				Title
				H1400 series, Circuit+ normOTO fuse
				Drawing type
				schematic
				Drawing number
				H1400 drawing 1
				Sheet
				1 of 1
				Layers / Sheet
				0 1 2 6 9 11 Sheet 01

