

# Products

Home > Products > DC Type (Pin) > PF-27A35EPDBQ



- SMD Magnetic Buzzer
- SMD Piezo Electric Sounder
- Piezo Electric Sounder
- Magnetic Buzzer
- Piezo Electric Buzzer (PK)
- Piezo Electric Buzzer (PF)**
  - DC Type (Pin)
  - DC Type (Wire)
  - AC / DC Type (Pin)
- Piezo Electric Buzzer (PL)
- Piezo Electric Buzzer (PFD)
- Piezo Electric Buzzer (PLD)
- Piezo Electric Buzzer (PM)
- Mini Microphone
- Piezo Siren / Horn Siren
- Horn Speaker
- Speaker
- Piezo Electric Ceramic Element
- Piezo Electric Speaker
- Wireless LED Siren

## DC Type (Pin)



## PF-27A35EPDBQ

### Material and Weight


|             |                              |
|-------------|------------------------------|
| Housing     | ABS 757 UL94HB Plastic Resin |
| Color       | Hyaline                      |
| Pin         | Tin Plated Brass             |
| Weights (g) | 21                           |



### Electrical Characteristics

|                             |                              |     |
|-----------------------------|------------------------------|-----|
| Oscillation Frequency       | 3.5 ± 0.5                    | KHz |
| Operation Voltage           | 3 ~ 15                       | Vdc |
| Rated Voltage               | 12                           | Vdc |
| Current Consumption (Max.)  | 18 at Rated Voltage          | mA  |
| Sound Pressure Level (Min.) | 95 at 30 cm at Rated Voltage | dB  |
| Tone / Pulse Rate           | Fast Pulse 3.0               |     |
| LED Colour                  | Blue                         |     |
| Operating Temperature       | -20 ~ +70                    | °C  |
| Storage Temperature         | -30 ~ +80                    | °C  |

### Dimensions

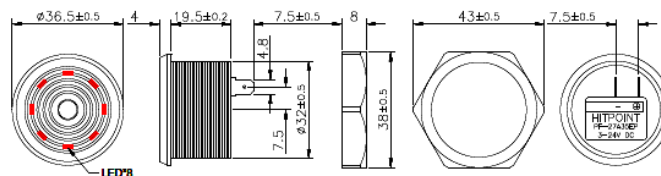

### Contact us

If you need any further information, please don't hesitate to contact us.

### Michael Kuo

Tel: +886-2-2601-3311#120

E-mail: michael@hitpoint.com.tw

Fax: +886-2-2601-3898

E-mail: hitpoint@hitpoint.com.tw