



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

Piezo Electric Buzzer PK-12N40PEDGQ

(RoHS)

DATE:2014.09.18


1 . Electrical Characteristics

VER .:3

| | |
|--------------------------------|-----------------------------|
| Oscillation Frequency (KHz) | 4.1 ±0.5 |
| Operating Voltage (Vdc) | 3.5 ~ 15 |
| Rated Voltage (Vdc) | 12 |
| Current Consumption (mA/max.) | 12t Rated Voltage |
| Sound Pressure Level (dB/min.) | 83 at 10cm at Rated Voltage |
| Tone/Pulse Rate | Constant |
| LED Colour | GREEN |
| Operating Temperature (°C) | -20 ~ +100 |
| Storage Temperature (°C) | -30 ~ +110 |
| Condition by wave (°C) | 260±5°C / within 5sec |
| Condition by hand (°C) | 350±20°C / within 5sec |

2 . Dimensions and Material

2-1Shape

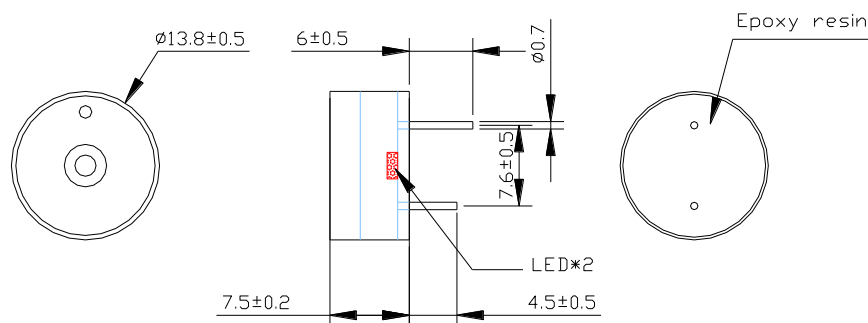

Unit : mm



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

2-2 Material

| | |
|---------------|-----------------------|
| Housing | PBT (Color : Hyaline) |
| Leading Pin | Tin Plated Brass |
| Weight (Gram) | 1.0 |


3 TESTING METHOD

· *Standard Measurement conditions*

Temperature: 25 ± 2 °C Humidity: 45-60%

· *Acoustic Characteristics*

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

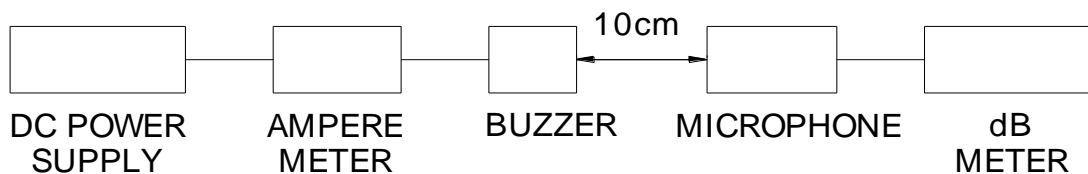



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

4.RELIABILITY

| ITEMS | METHOD OF TEST AND MEASUREMENTS | PERFORMANCE |
|-----------------------------------|---|---------------------------------------|
| <i>Coldness withstanding</i> | <i>After 98 hours of being exposed to -30℃ environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i> | <i>No abnormality shall exist</i> |
| <i>Hotness withstanding</i> | <i>After 98 hours of being exposed to +110℃ environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i> | <i>No abnormality shall exist</i> |
| <i>Humidity withstanding</i> | <i>After 98 hours of being exposed to 40℃ 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.</i> | <i>No abnormality shall exist</i> |
| <i>Durability</i> | <i>Testing after 1,000 hours actual continuous operation.(at standard measurement conditions)</i> | <i>No abnormality shall exist</i> |
| <i>Drop withstanding</i> | <i>A natural drop from 75cm high down to the ground.</i> | <i>No abnormality shall exist</i> |
| <i>Vibration withstanding</i> | <i>Vibration of 2,000 cycles per minute, 2mm amplitude, applied in X, Y and Z directions for 30 minutes each.</i> | <i>No abnormality shall exist</i> |

5 PACKAGE METHOD

<1> 1600pcs per box , total 4 boxes per carton , total 6400pcs per carton;

Volume: L*W*H=520*335*290mm

<2> N . W . : 3.2KGS ; G . W . : 5.2KGS

< 3 > RoHS Mark