
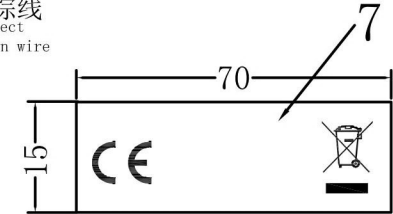



客户料号:R6503

产品图号:

版次	说明	变更日期	变更者
A/0			

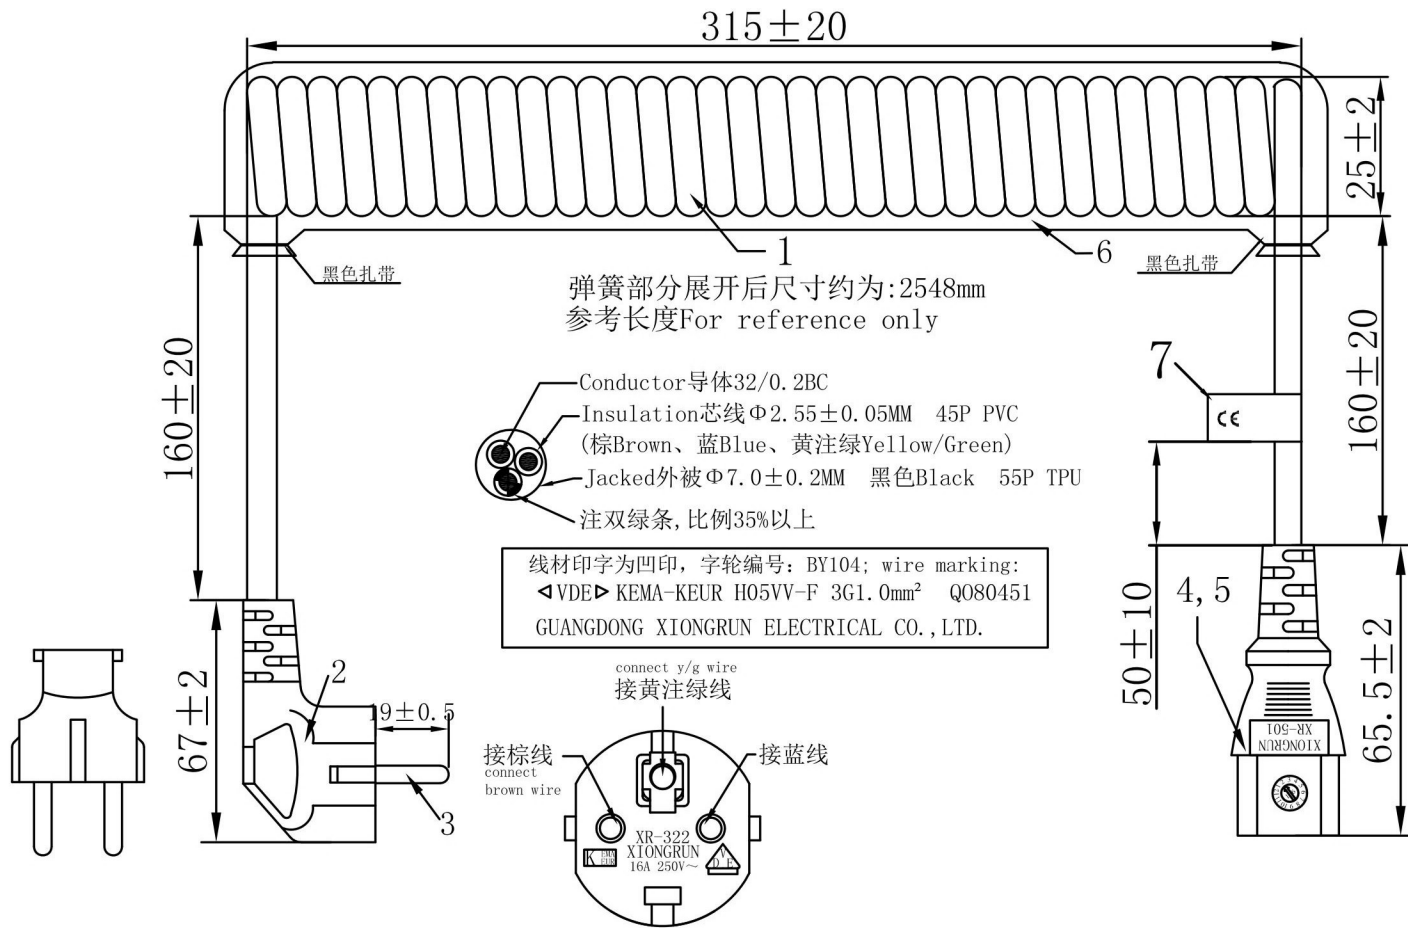

技术要求: requirement:

1: 耐压测试: 外高压4200V/S; 内高压2500V/S;
 Dielectric voltage :between jacket and conductors 4200V/S
 between conductors 2500V/S

2: 绝缘阻抗不小于100兆欧.
 Insulation resistance 100M Ω .

3: 100%导通OK.
 Continuity of lead 100% OK.

4: 符合ROHS.
 RoHS COMPLIANT.

7	线上标签70*15MM(白底黑字不干胶, 防水镀膜) white label with black letter	GB00503	1	EA
6	PE袋	GD40048000501	1	EA
5	一体式品字尾内架+端子, 白色(鸿灏 HC-012Q3-08AW0)	JB5013013-W	1	EA
4	品字尾插座C13(XR-501) COLOR: 黑色black, PVC 55P	BC7055PBK0011	0.0245	Kg
3	$\Phi 4.8$ 法国头端子, 白色, 黄铜镀镍(德昌 DC-0001A-3)	DAFG48001T-1W	1	EA
2	法式插头(XR-322), 16A 250V~ COLOR: 黑色black, PVC 55P	BC7055PBK0011	0.0485	Kg
1	H05VV-F 3G1.0mm ² COLOR: 黑色black, 裁线长:L=2980mm	CV5VV3100A00112	1	EA
NO.	DESCRIPTION	XIONGRUN PN	QTY	UNIT

DESCRIPTION	AC POWER CABLE	DRAW NO.	XR-0672468	UNIT	M M
PARTS NO		SCALE	NONE	DATE	08/05/2019
APPROVED		CHECKED		DRAWING	梁静雅