


Isolier Distanz-Bolzen Kunststoff

Entretoises hexagon. isol.

Insulating spacers

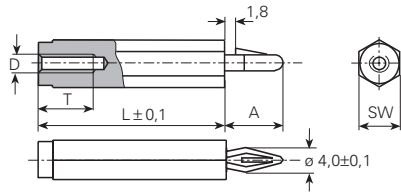

Werkstoff:
pa = Polyamid, schwarz

Matière:
pa = polyamide, noire

Material:
pa = polyamid, black

Temperaturbeständigkeit:
-40°C bis +110°C

Résistant à une température de:
-40°C à +110°C

Temperature range:
-40°C up to +110°C

einschnappbar mit Innengewinde / encliquante avec filet femelle / snap in form with internal thread

øD mm	L mm	SW mm	T mm	A mm	Artikelnummer Numéro d'article Part-No.	øD mm	L mm	SW mm	T mm	A mm	Artikelnummer Numéro d'article Part-No.	
M3	6	8	3	9.5	m30e06.00.pa		30	8	10	9.5	m30e30.00.pa	
	7	8	3.5	9.5	m30e07.00.pa		31	8	10	9.5	m30e31.00.pa	
	8	8	4	9.5	m30e08.00.pa		32	8	10	9.5	m30e32.00.pa	
	9	8	4.5	9.5	m30e09.00.pa		33	8	10	9.5	m30e33.00.pa	
	10	8	5	9.5	m30e10.00.pa		34	8	10	9.5	m30e34.00.pa	
	11	8	5.5	9.5	m30e11.00.pa		35	8	10	9.5	m30e35.00.pa	
	12	8	6	9.5	m30e12.00.pa		36	8	10	9.5	m30e36.00.pa	
	13	8	6.5	9.5	m30e13.00.pa		37	8	10	9.5	m30e37.00.pa	
	14	8	7	9.5	m30e14.00.pa		38	8	10	9.5	m30e38.00.pa	
	15	8	7.5	9.5	m30e15.00.pa		39	8	10	9.5	m30e39.00.pa	
	16	8	8	9.5	m30e16.00.pa		40	8	10	9.5	m30e40.00.pa	
	17	8	8.5	9.5	m30e17.00.pa		41	8	10	9.5	m30e41.00.pa	
	18	8	9	9.5	m30e18.00.pa		42	8	10	9.5	m30e42.00.pa	
	19	8	9.5	9.5	m30e19.00.pa		43	8	10	9.5	m30e43.00.pa	
	20	8	10	9.5	m30e20.00.pa		44	8	10	9.5	m30e44.00.pa	
	21	8	10	9.5	m30e21.00.pa		45	8	10	9.5	m30e45.00.pa	
	22	8	10	9.5	m30e22.00.pa		46	8	10	9.5	m30e46.00.pa	
	23	8	10	9.5	m30e23.00.pa		47	8	10	9.5	m30e47.00.pa	
	24	8	10	9.5	m30e24.00.pa		48	8	10	9.5	m30e48.00.pa	
	25	8	10	9.5	m30e25.00.pa		49	8	10	9.5	m30e49.00.pa	
	26	8	10	9.5	m30e26.00.pa		50	8	10	9.5	m30e50.00.pa	
	27	8	10	9.5	m30e27.00.pa		M4	14	8	9	9.5	m40e14.00.pa
	28	8	10	9.5	m30e28.00.pa			18	8	9	9.5	m40e18.00.pa
	29	8	10	9.5	m30e29.00.pa							

Andere Abmessungen auf Anfrage

Autres dimensions sur demande

Further dimensions on request