


XSA-37 (XSA02) Xicato XSM LED Star Heat Sink ø 50mm

Features & Benefits

- Designed for Xicato XIM series - thermal class C
- Xicato accessory reference XSA-37 - Mechanical compatible with XSA-02
- Thermal resistance Rth 6.9°C/W
- Can be foreseen from M2 or M3 mounting holes
- Diameter 49mm base
- Standard height 35mm - other heights on request
- Extruded from highly conductive aluminium
- Standard colors - clear anodised - black anodised
- Other colors and finishings on request (all RAL/Pantone colors available)

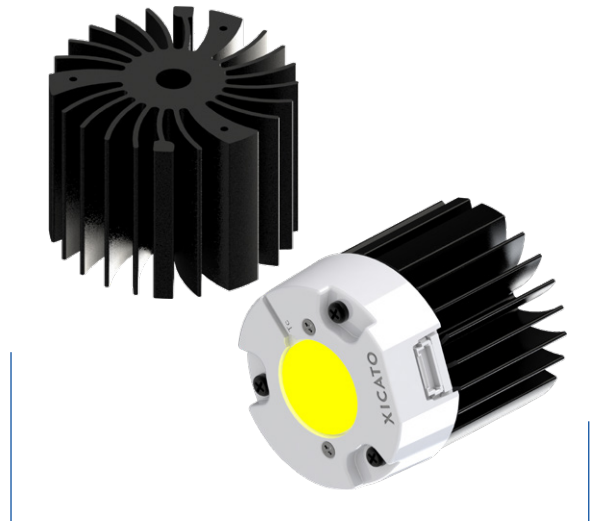

Order Information


xicato[®]

Example : XSA-37-M2-B-13

XSA-37 - **1** - **2** - **3**

- 1** XSM Mounting
 "M2" - M2 screw threads
 "M3" - M3 screw threads
- 2** Anodising color
 "B" - Black Anodised
 "C" - Clear Anodised
 "Z" - Custom (specify)
- 3** Mounting Options - see graphics for details
 Combinations available
 Ex. order code - 13
 means option 1 and 3 combined

MOUNTING OPTION	THREAD	THREAD DEPTH
NONE/BLANC	NONE	NONE
1	M10 x 1.5	20mm MIN.
2	3/8"-16 UNC	0.75" MIN.
3	M3 x 0.5	9mm MIN.
4	#6-32 UNC	0.35" MIN.
5	M2 x 0.4	8mm MIN.
6	M2 x 0.4	8mm MIN.
7	M2 x 0.4	5mm MIN.

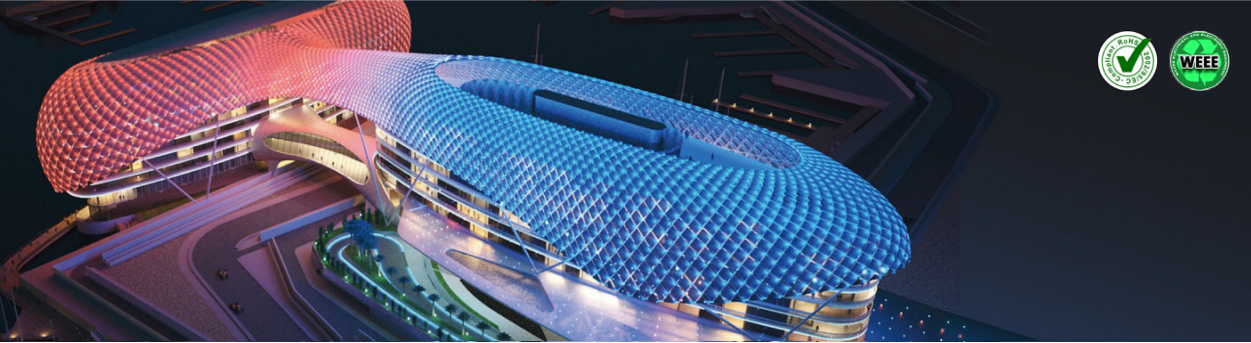

XSA-37 (XSA02) Xicato XSM LED Star Heat Sink ϕ 50mm



Product Details

	Total Height ^{mm}	Rth($^{\circ}$ C/W)	Volume ^{mm³}	Cooling Surface ^{mm²}	Weight ^{gr}
XSA-37	35.00	6.9	27813.42	26807.46	71


Mounting Options

Notes:

1. MechaTronix reserves the right to change products or specifications without prior notice.
2. Mentioned models are an extraction of the full product range. For specific mechanical adaptations please contact MechaTronix.
3. All these types are made by extrusion process from highly conductive aluminum type AL6063 T5 with a typical Thermal Conductivity of 209W/m-K.

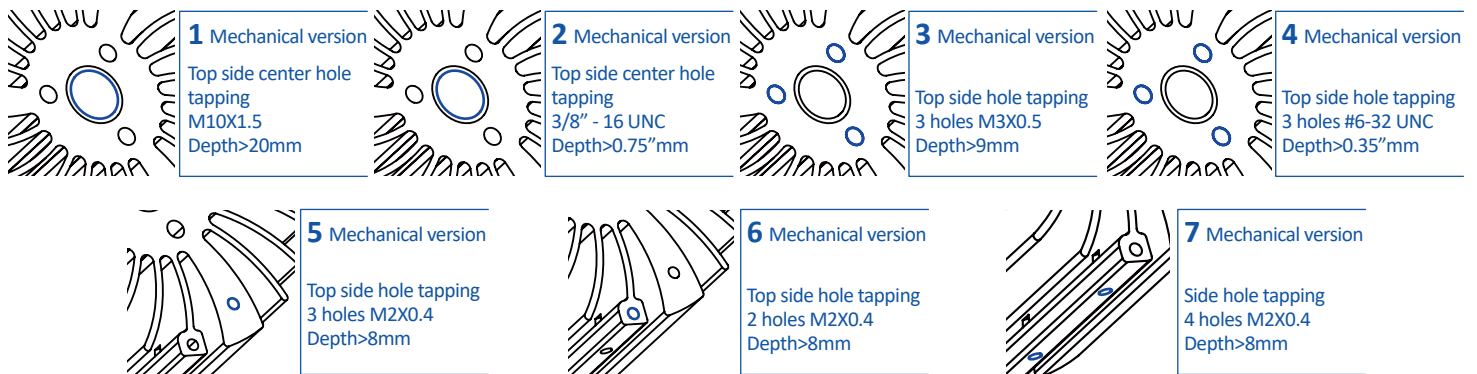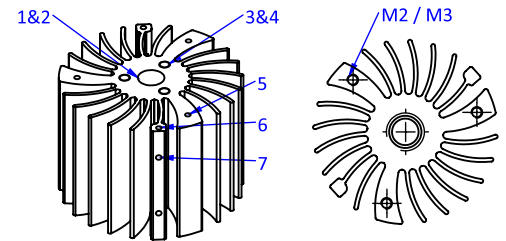


Drawings & Dimensions

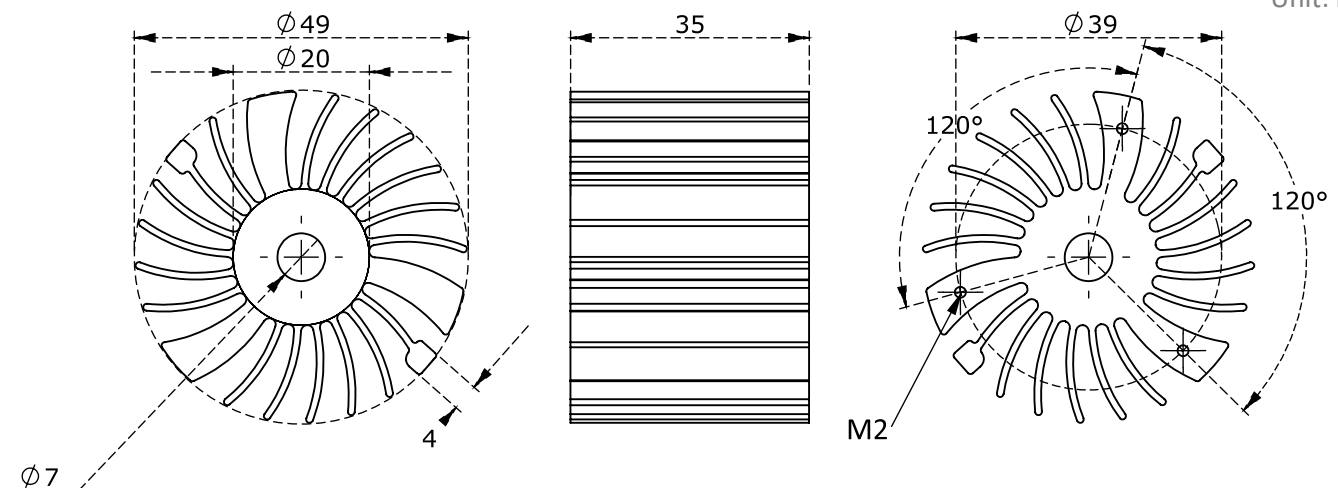

Example : XSA-37-M2

Unit: mm

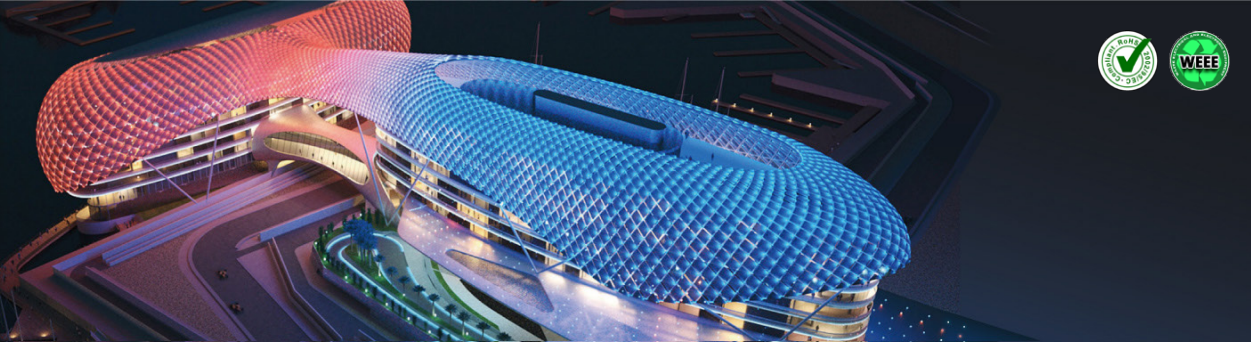


XSA-37 (XSA02) Xicato XSM LED Star Heat Sink ϕ 50mm

Thermal Data

Heat sink base to ambient thermal resistance, R_{hs-amb} [K/W]

Power (W)	XSA-37
3	8.5
5	7.6
7	7.0
10	6.4
Rth Av.	6.9

Heat sink to ambient temperature difference [$^{\circ}$ C]

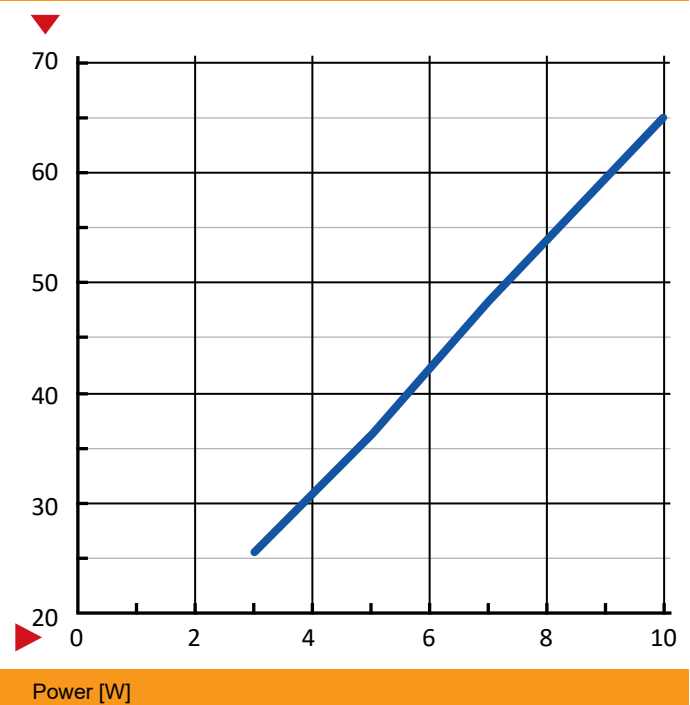

Spreading resistance, R_{sp} [K/W]

Base thickness	Ratio of light engine (LE) area over heat sink base area, ALE/Ahs [%]	t=2mm	t=3mm	t=5mm	t=10mm
		1%	0.87	0.61	0.41
	3%	0.68	0.47	0.30	0.20
	5%	0.54	0.37	0.24	0.15
	8%	0.44	0.30	0.19	0.12
	11%	0.36	0.24	0.15	0.09
	20%	0.24	0.17	0.10	0.06
	32%	0.16	0.11	0.07	0.04
	62%	0.06	0.04	0.03	0.01

Heat sink base spreading resistance, R_{sp} [K/W], based on base thickness, t

