

# ATPH 1850-0250



Alu-Topline  
Enclosure profiles, horizontally-divided

Order no.: 92850250

**Colour of enclosure group**

Natural-coloured anodised aluminium profile; plastic lid quartz grey, similar to RAL 7039 or graphite grey, similar to RAL 7024; special colours on request

**Protection class**


IP 40/DIN EN 60529; IP 54/DIN EN 60529 as an option

**Enclosure material**

Extruded profiles: Al Mg Si 0.5 anodised; plastic lid: ABS; for details see Technical Information

Scope of delivery: Enclosure profile, 2 parts

Note: Special lengths on request.

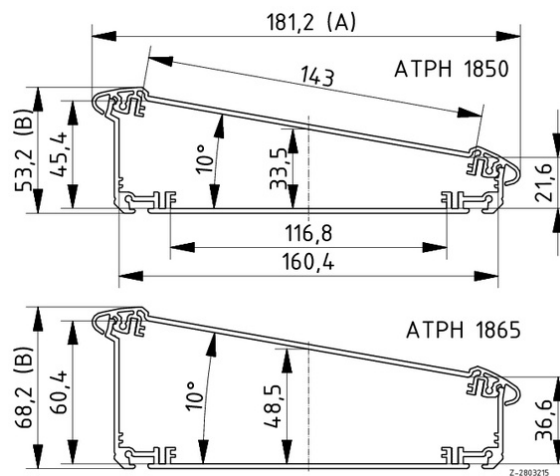

|          |          |
|----------|----------|
| <b>A</b> | 181,2 mm |
| <b>B</b> | 53,2 mm  |
| <b>C</b> | 250 mm   |

**Technical drawings**

3D product data in STEP format:

[Registration necessary](#)

Catalogue drawing in DXF format:

[92850250\\_ATPH-1850-0250.dxf](#) (490 KB)

Basic drawing for processing work:

[92850250\\_ATPH-1850-250-G.dxf](#) (425 KB)

Basic drawing for processing work:

[92850250\\_ATPH-1850-0250-G.dxf](#) (425 KB)

Catalogue drawing in PDF format:

[92850250\\_ATPH-1850-0250.pdf](#) (42 KB)

**Assembly instructions**

[Alu-Topline-AT-0...-7024-UWB.pdf](#) (500 KB)

**Chapter download**

[Alu-Topline\\_GB.pdf](#) (326 KB)


# Accessories



## End cover

92050024 [ATD 1850-7024](#)  
92050039 [ATD 1850-7039](#)

For ATPH 1850 Graphite grey  
For ATPH 1850 Quartz grey



## Seals for ingress protection IP 54

92050000 [AT 1850 DI](#) For ATPH 1850



## Wall fastening, aluminium

92800250 [AT 1800-0250 WB](#) For ATPH ....-0250



## Universal wall fitting

92825024 [AT 0250-7024 UWB](#) For ATPH ....-0250 Graphite grey



## Insulating strip for PCB mounting on the profile

92000100 [AT-IS 00020](#) Length: 101,5 mm



## Rubber feet

84006700 [AB - GF](#) Polyurethane, 65-75 Shore Black

\* = Available on request