



2605061812 Additional Assembly, Test and Ship Site for EFM8BB2x/EFM8UB1x/CP2102N (20-QFN-3x3)

PCN Issue Date: May 06, 2026

Effective Date: Aug 12, 2026

PCN Type: Assembly; Test

Description of Change

Silicon Labs is pleased to announce the successful qualification of UNISEM (M) BERHAD as an additional assembly, test and ship site for EFM8BB2x/EFM8UB1x/CP2102N (20-QFN-3x3). UNISEM is an existing assembly and test site for Silicon Labs, and is certified to ISO9001, ISO14001 and IATF16949.

UNISEM Ship Address:
UNISEM (M) BERHAD
LOT 302285, JALAN INDUSTRI 1/1,
KAWASAN PERINDUSTRIAN GOPENG,
31600 GOPENG, PERAK
MALAYSIA.

As of the effective date of the PCN, Silicon Labs may ship from either of the qualified sites.

Software Impact Description

No impact

Reason for Change

Additional Assembly and Test capacity for supply continuity

Impact on Form, Fit, Function, Quality, Reliability

There is no change on form, fit, function, quality or reliability

Product Identification

Existing Part #
EFM8BB21F16G-C-QFN20
EFM8BB21F16G-C-QFN20R
EFM8BB21F16I-C-QFN20
EFM8BB21F16I-C-QFN20R
EFM8UB10F8G-C-QFN20
EFM8UB10F8G-C-QFN20R
EFM8UB10F16G-C-QFN20
EFM8UB10F16G-C-QFN20R
EFM8UB10P1098F16GM-C
EFM8UB10P1098F16GM-CR
EFM8UB10P1425F16GM-C
EFM8UB10P1425F16GM-CR
CP2102N-A02-GQFN20
CP2102N-A02-GQFN20R

Last Date of Unchanged Product: Aug 12, 2026

Qualification Samples

Available upon request

Customer Response

Lack of acknowledgment of the PCN within 30 days constitutes acceptance of the change, Ref. JEDEC-J-STD-046.

To request further data or inquire about this notification, please contact your Silicon Labs sales representative. A list of Silicon Labs sales representatives is available at <https://www.silabs.com>.

Customers may approve early PCN acceptance by emailing approval, along with PCN # to

User Registration

Register today to create your account on Silabs.com. Your personalized profile allows you to receive technical document updates, new product announcements, "how-to" and design documents, product change notices (PCN) and other valuable content available only to registered users. <https://www.silabs.com/profile>

Qualification Data

Please refer to qualification report below



EFM8BB2x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8BB2x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - 20QFN - CuPd Wire ASECL							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q037190 Q037191 Q037192	0/77 0/80 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037199 Q037200 Q037202	0/81 0/80 0/82	1 1 1	3 lots 0/243	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q037196 Q037197 Q037198	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q037193 Q037194 Q037195	0/30 0/30 0/30	1 1 1	3 lots 0/90	Pass
Test Group A – Accelerated Environment Stress Tests - 20QFN - CuPd Wire UNISEM							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q052900 Q052901 Q052902 Q052903	0/80 0/80 0/80 0/80	1 1 1 1	4 lots 0/320	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q053113 Q053117 Q053121	0/80 0/79 0/80	1 1 1	3 lots 0/239	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q053114 Q053118 Q053122	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q053115 Q053119 Q053123	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Test Group A – Accelerated Environment Stress Tests - 28QFN - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037163 Q037164 Q037165	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q037160 Q037161 Q037162	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q035682 Q037977 Q037159 Q037806	0/30 0/80 0/30 0/45	1 1 1 1	4 lots 0/185	Pass



EFM8BB2x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL_QualitySystems@silabs.com

EFM8BB2x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - 24QSOP - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q036513 Q036515 Q036519	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q036526 Q036527 Q036528	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q036523 Q036524 Q036525	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q036520 Q036521 Q036522	0/28 0/28 0/28	1 1 1	3 lots 0/84	Pass
Test Group A – Accelerated Environment Stress Tests - 24QFN - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037163 Q037164 Q037165	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q036520 Q036521 Q036522	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q036682 Q037977 Q037159	0/30 0/80 0/30	1 1 1	3 lots 0/140	Pass



EFM8BB2x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8BB2x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group B – Accelerated Lifetime Simulation Tests							
HTOL	AEC-Q100, JESD22-A108 T _J ≥ 125°C, Dynamic V _{CC} =3.6V, 1000 hours	3 lots, N=>77	Q035684 Q035685 Q037250	0/84 0/84 0/80		3 lots 0/248	Pass
LTOL	JA108 -10°C, Dynamic V _{CC} =3.6V, 1000 hours	1 lot, N=>32	Q036550	0/35		1 lots 0/35	Pass
ELFR	AEC-Q100-008 T _J ≥ 125°C, Dynamic V _{CC} =3.6V, 48 hours	3 lots, N=>800	Q035681 Q036910 Q037251 Q036509	0/839 0/839 0/836 0/840		4 lots 0/3354	Pass
Data Retention High Temp	AEC-Q100-005 150°C, 1000 hours	3 lots, N=>39	Q035781 Q035783 Q037252	0/45 0/44 0/45		3 lots 0/134	Pass
Data Retention Low Temp	AEC-Q100-005 25°C, 1000 hours	3 lots, N=>38	Q035784 Q035786 Q037253	0/45 0/45 0/45		3 lots 0/135	Pass
NVM P/E Cycling High Temp	AEC-Q100-005 85°C	3 lots, N=>77	Q035787 Q035782 Q037254	0/84 0/84 0/84		3 lots 0/252	Pass
NVM P/E Cycling Low Temp	AEC-Q100-005 55°C	3 lots, N=>77	Q035791 Q035785 Q037255	0/80 0/80 0/84		3 lots 0/244	Pass
Test Group C – Package Assembly Integrity Tests							
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 20QFN	Q037487 Q053132 Q053133 Q053134	0/5 0/5 0/5 0/5	2 6 6 6		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 28QFN	Q037489	0/5	3		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 24QSOP	Q037707	0/5	4		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 24QFN	Q038577	0/5	5		Pass



EFM8BB2x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8BB2x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group E – Electrical Verification							
ESD-HBM	AEC-Q100-002	1 lot, N=>3	Q036561 Q035689 Q037643			2 kV 2 kV 2 kV	Class 2 Class 2 Class 2
ESD-CDM	AEC-Q100-011	1 lot, N=>3	Q036705 Q035688 Q037648 Q036558 Q036512 Q036628 Q052904		2 3 3 3 4 5 6	TC 1500V TC 1250V TC 1250V TC 1500V TC 1500V TC 1500V TC 1000V	Class C3 Class C3 Class C3 Class C3 Class C3 Class C3 Class C3
Latch Up	AEC-Q100-004 ±100mA Overvoltage = 0V?V	1 lot, N=>6	Q037647 Q037674			125 °C 25 °C	Class I.A Class I.A
Electromagnetic Compatibility	SAE J1752	1 lot, N=>1	Q038023				Pass

Notes:

1. Parts are Pre-conditioned at MSL2/260°C
2. 20-QFN
3. 28-QFN
4. 24-QSOP
5. 24-QFN
6. Unisem 20-QFN

This report applies to the following part numbers:

EFM8BB21F16G-C-QFN20	EFM8BB22F16G-C-QFN28
EFM8BB21F16G-C-QSOP24	EFM8BB22F16I-C-QFN28
EFM8BB21F16I-C-QFN20	EFM8BB20F16G-C-QFN20
EFM8BB21F16I-C-QSOP24	EFM8BB20F16I-C-QFN20



EFM8UB1x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8UB1x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - 20QFN - CuPd Wire ASECL							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Vcc=3.6V, 96 hours	3 lots, N=>77	Q037190 Q037191 Q037192	0/77 0/80 0/80	1 1 1	3 lots 0/237	Pass
UHAIST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037199 Q037200 Q037202	0/81 0/80 0/82	1 1 1	3 lots 0/243	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -85°C to 150°C 500 cycles	3 lots, N=>77	Q037196 Q037197 Q037198	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q037193 Q037194 Q037195	0/30 0/30 0/30	1 1 1	3 lots 0/90	Pass
Test Group A – Accelerated Environment Stress Tests - 20QFN - CuPd Wire UNISEM							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Vcc=3.6V, 96 hours	3 lots, N=>77	Q052900 Q052901 Q052902 Q052903	0/80 0/80 0/80 0/80	1 1 1 1	4 lots 0/320	Pass
UHAIST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q053113 Q053117 Q053121	0/80 0/79 0/80	1 1 1	3 lots 0/239	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -85°C to 150°C 500 cycles	3 lots, N=>77	Q053114 Q053118 Q053122	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q053115 Q053119 Q053123	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Test Group A – Accelerated Environment Stress Tests - 28QFN - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Vcc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAIST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037163 Q037164 Q037165	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -85°C to 150°C 500 cycles	3 lots, N=>77	Q037160 Q037161 Q037162	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q035682 Q037977 Q037159 Q037806	0/30 0/80 0/30 0/45	1 1 1 1	4 lots 0/185	Pass



EFM8UB1x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8UB1x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - 24QSOP - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Vcc=3.6V, 96 hours	3 lots, N=>77	Q036513 Q036515 Q036519	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q036526 Q036527 Q036528	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q036523 Q036524 Q036525	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q036520 Q036521 Q036522	0/28 0/28 0/28	1 1 1	3 lots 0/84	Pass
Test Group A – Accelerated Environment Stress Tests - 24QFN - CuPd Wire UTACTH							
HAST	AEC-Q006, JESD22-A110 130°C, 85%RH Vcc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037163 Q037164 Q037165	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q038520 Q038521 Q038522	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q035682 Q037977 Q037159	0/30 0/80 0/30	1 1 1	3 lots 0/140	Pass



EFM8UB1x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8UB1x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group B – Accelerated Lifetime Simulation Tests							
HTOL	AEC-Q100, JESD22-A108 T _j ≥ 125°C, Dynamic V _{cc} =3.6V, 1000 hours	3 lots, N=>77	Q035684 Q035685 Q037250	0/84 0/84 0/80		3 lots 0/248	Pass
LTOL	JA108 -10°C, Dynamic V _{cc} =3.6V, 1000 hours	1 lot, N=>32	Q036550	0/35		1 lots 0/35	Pass
ELFR	AEC-Q100-008 T _j ≥ 125°C, Dynamic V _{cc} =3.6V, 48 hours	3 lots, N=>800	Q035681 Q036910 Q037251 Q036509	0/839 0/839 0/836 0/840		4 lots 0/3354	Pass
Data Retention High Temp	AEC-Q100-005 150°C, 1000 hours	3 lots, N=>39	Q035781 Q035783 Q037252	0/45 0/44 0/45		3 lots 0/134	Pass
Data Retention Low Temp	AEC-Q100-005 25°C, 1000 hours	3 lots, N=>38	Q035784 Q035786 Q037253	0/45 0/45 0/45		3 lots 0/135	Pass
NVM P/E Cycling High Temp	AEC-Q100-005 85°C	3 lots, N=>77	Q035787 Q035782 Q037254	0/84 0/84 0/84		3 lots 0/252	Pass
NVM P/E Cycling Low Temp	AEC-Q100-005 55°C	3 lots, N=>77	Q035791 Q035785 Q037255	0/80 0/80 0/84		3 lots 0/244	Pass
Test Group C – Package Assembly Integrity Tests							
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 20QFN	Q037487 Q053132 Q053133 Q053134	0/5 0/5 0/5 0/5	2 7 7 7		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 28QFN	Q037489	0/5	3		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 24QSOP	Q037707	0/5	4		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 24QFN	Q038577	0/5	5		Pass



EFM8UB1x AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

EFM8UB1x Rev A2/A3/A4, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group E – Electrical Verification							
ESD-HBM	AEC-Q100-002	1 lot, N=>3	Q036561		6	2 kV	Class 2
			Q035689		6	2 kV	Class 2
			Q037643		6	2 kV	Class 2
ESD-CDM	AEC-Q100-011	1 lot, N=>3	Q036705		2	TC 1500V	Class C3
			Q035688		3	TC 1250V	Class C3
			Q037648		3	TC 1250V	Class C3
			Q036558		3	TC 1500V	Class C3
			Q036512		4	TC 1500V	Class C3
			Q038628		5	TC 1500V	Class C3
			Q052904		7	TC 1000V	Class C3
Latch Up	AEC-Q100-004 ±100mA Overvoltage = 0V7V	1 lot, N=>6	Q037647			125 °C	Class I.A
			Q037674			25 °C	Class I.A
Electromagnetic Compatibility	SAE J1752	1 lot, N=>1	Q038023				Pass

Notes:

1. Parts are Pre-conditioned at MSL2/260°C
2. 20-QFN
3. 28-QFN
4. 24-QSOP
5. 24-QFN
6. Five USB-related pins passed 8 kV. They are D+, D-, VBUS, VSS, VREGIN
7. Unisem 20-QFN

This report applies to the following part numbers:	
EFM8UB10F16G-C-QFN20	EFM8UB11F16G-C-QSOP24
EFM8UB10F16G-C-QFN28	EFM8UB11F8G-C-QFN24
EFM8UB10F8G-C-QFN20	
EFM8UB11F16G-C-QFN24	

silabs.com | EFM8UB1x_AEC_Qual_Report

Silicon Labs - Internal use only

Prepared on: 2026-04-30 by Wee Han Poh



CP2102N AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

CP2102N, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests – 20QFN – CuPd Wire ASECL							
HAST	AEC-Q008, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q037190 Q037191 Q037192	0/77 0/80 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037199 Q037200 Q037202	0/81 0/80 0/82	1 1 1	3 lots 0/243	Pass
Temp Cycle	AEC-Q008, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q037198 Q037197 Q037198	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q008, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q037193 Q037194 Q037195	0/30 0/30 0/30	1 1 1	3 lots 0/90	Pass
Test Group A – Accelerated Environment Stress Tests – 20QFN – CuPd Wire UNISEM							
HAST	AEC-Q008, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q052900 Q052901 Q052902 Q052903	0/80 0/80 0/80 0/80	1 1 1 1	4 lots 0/320	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q053113 Q053117 Q053121	0/80 0/79 0/80	1 1 1	3 lots 0/239	Pass
Temp Cycle	AEC-Q008, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q053114 Q053118 Q053122	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q008, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q053115 Q053119 Q053123	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Test Group A – Accelerated Environment Stress Tests – 24QFN – CuPd Wire UTACTH							
HAST	AEC-Q008, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037183 Q037184 Q037185	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q008, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q038520 Q038521 Q038522	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q008, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q035882 Q037977 Q037159	0/30 0/80 0/30	1 1 1	3 lots 0/140	Pass



CP2102N AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

CP2102N, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly

Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - 28QFN - CuPd Wire UTACTH							
HAST	AEC-Q008, JESD22-A110 130°C, 85%RH Voc=3.6V, 96 hours	3 lots, N=>77	Q035792 Q035788 Q035789	0/80 0/77 0/80	1 1 1	3 lots 0/237	Pass
UHAST	AEC-Q100, JESD22-A102 130°C, 85%RH 96 hours	3 lots, N=>77	Q037163 Q037164 Q037165	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
Temp Cycle	AEC-Q006, JESD22-A104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>77	Q037160 Q037161 Q037162	0/80 0/80 0/80	1 1 1	3 lots 0/240	Pass
HTSL	AEC-Q006, JESD22-A103 150°C, 1000hr	1 lot, N=>45	Q035682 Q037977 Q037159 Q037806	0/30 0/80 0/30 0/45	1 1 1 1	4 lots 0/185	Pass
Test Group B – Accelerated Lifetime Simulation Tests							
HTOL	AEC-Q100, JESD22-A108 T _j ≥ 125°C, Dynamic Voc=3.6V, 1000 hours	3 lots, N=>77	Q035684 Q035685 Q037250	0/84 0/84 0/80		3 lots 0/248	Pass
LTOL	JA108 -10°C, Dynamic Voc=3.6V, 1000 hours	1 lot, N=>32	Q036550	0/35		1 lots 0/35	Pass
ELFR	AEC-Q100-008 T _j ≥ 125°C, Dynamic Voc=3.6V, 48 hours	3 lots, N=>800	Q035681 Q036910 Q037251 Q036509	0/839 0/839 0/836 0/840		4 lots 0/3354	Pass
Data Retention High Temp	AEC-Q100-005 150°C, 1000 hours	3 lots, N=>39	Q035781 Q035783 Q037252	0/45 0/44 0/45		3 lots 0/134	Pass
Data Retention Low Temp	AEC-Q100-005 25°C, 1000 hours	3 lots, N=>39	Q035784 Q035786 Q037253	0/45 0/45 0/45		3 lots 0/135	Pass
NVM P/E Cycling High Temp	AEC-Q100-005 85°C	3 lots, N=>77	Q035787 Q035782 Q037254	0/84 0/84 0/84		3 lots 0/252	Pass
NVM P/E Cycling Low Temp	AEC-Q100-005 55°C	3 lots, N=>77	Q035791 Q035785 Q037255	0/80 0/80 0/84		3 lots 0/244	Pass



CP2102N AEC-Q100 Qualification Report Rev.Q

The information contained in this document is CONFIDENTIAL and PROPRIETARY to Silicon Labs and is intended only for the internal use of Silicon Labs. Any other use or reproduction of any part of this document is prohibited without Silicon Labs' written consent. Any use of this document outside of Silicon Labs is solely at the risk of the user. Silicon Labs disclaims all warranties concerning the accuracy of the information contained in this document. This document is version controlled; printed or electronically saved versions of this documents may be obsolete. Any misuse of this document should be reported to DL.QualitySystems@silabs.com

CP2102N, HHGrace Fabrication, ASECL, UTACTH & UNISEM Assembly


Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group C – Package Assembly Integrity Tests							
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 20QFN	Q037487 Q053132 Q053133 Q053134	0/5 0/5 0/5 0/5	2 6 6 6		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 28QFN	Q037489	0/5	3		Pass
Wire Bond Pull	AEC-Q006, M-STD-883 Performed post-TC	5 units, N=>30 24QFN	Q038577	0/5	4		Pass
Test Group E – Electrical Verification							
ESD-HBM	AEC-Q100-002	1 lot, N=>3	Q036561 Q036689 Q037643		5 5 5	2 kV 2 kV 2 kV	Class 2 Class 2 Class 2
ESD-CDM	AEC-Q100-011	1 lot, N=>3	Q036705 Q036688 Q037648 Q036558 Q036628 Q052904		2 3 3 3 4 6	TC 1500V TC 1250V TC 1250V TC 1500V TC 1500V TC 1000V	Class C3 Class C3 Class C3 Class C3 Class C3 Class C3
Latch Up	AEC-Q100-004 ±100mA Overvoltage = OV?V	1 lot, N=>6	Q037647 Q037674			125 °C 25 °C	Class I.A Class I.A
Electromagnetic Compatibility	SAE J1752	1 lot, N=>1	Q038023				Pass

Notes:

- Parts are Pre-conditioned at MSL2/260°C
- 20-QFN
- 28-QFN
- 24-QFN
- Five USB-related pins passed 8 kV. They are D+, D-, VBUS, VSS, VREGIN
- Unisem 20-QFN

This report applies to the following part numbers:

CP2102N-A01-GQFN20/R	CP2102N-A02-GQFN20/R
CP2102N-A01-GQFN24/R	CP2102N-A02-GQFN24/R
CP2102N-A01-GQFN28/R	CP2102N-A02-GQFN28/R

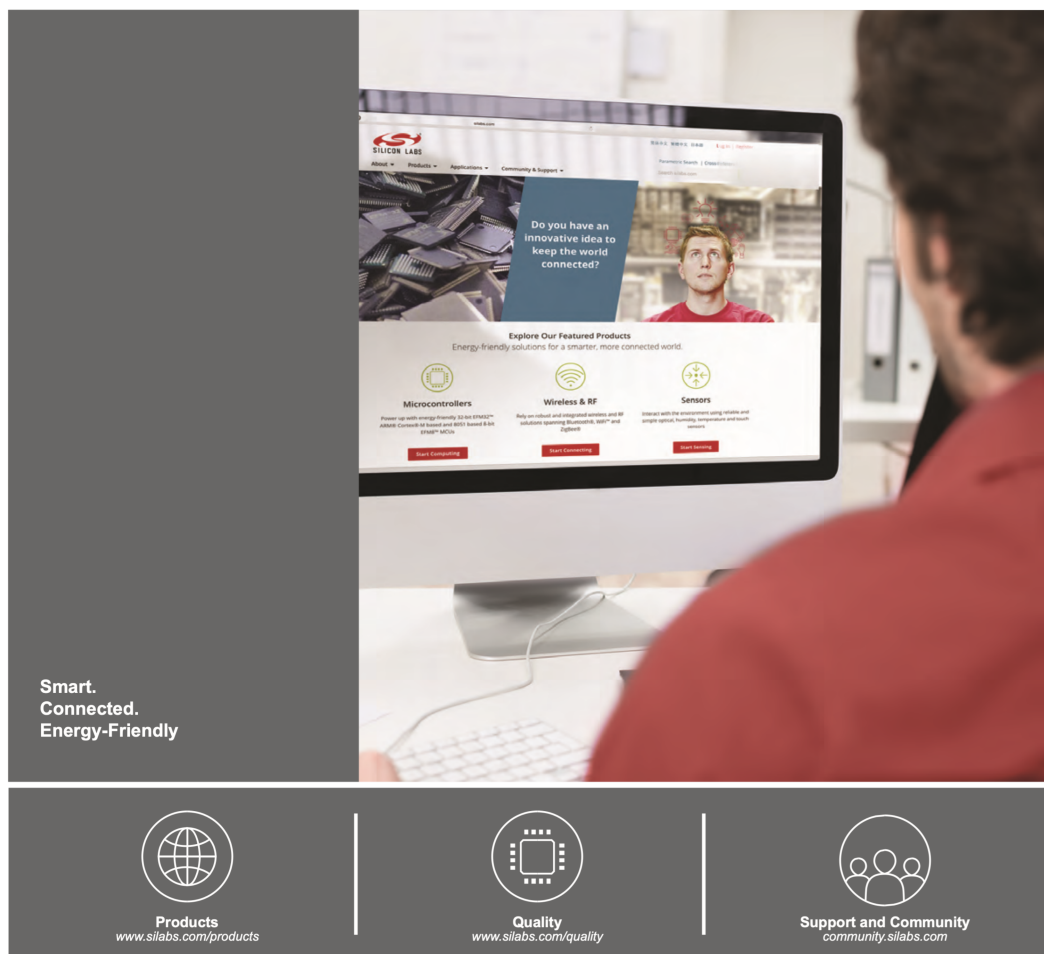

Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Labs shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any Life Support System without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, Clockbuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR®, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, ISOmodem®, Micrium, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.
400 West Cesar Chavez
Austin, TX 78701

<https://www.silabs.com>