
TT Transformers






Parameter	Value
Primary Voltage	230 Vac
Frequency	50 / 60 Hz
Operating mode	Continuous
Protection range	IP00
Cooling	Natural air cooling
Test Voltage	4200 Vac (between primary and secondary)
Maximum temperature rise	80 °C
Wildings	Copper
Magnetic core	Grain-oriented silicon steel (FeSi)
Internal Insulation	Polyester / Polyamide
External Insulation	Polyester
Lead length	200 mm
Applicable standard	EN 61558 and other applicable current standards

Technical Specifications

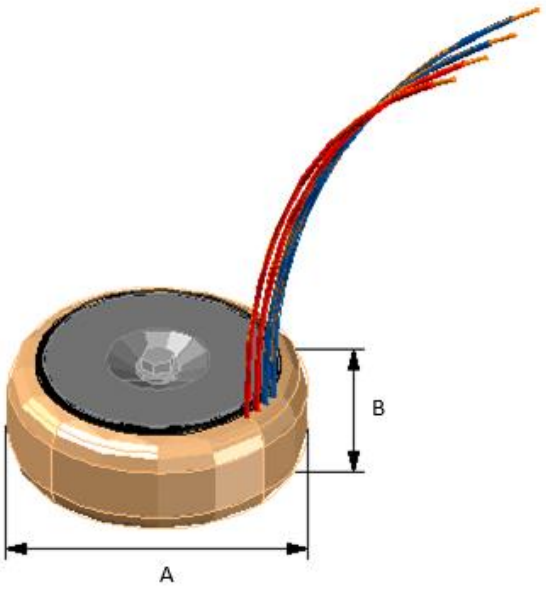

Reference	VA	Secondary (V)	Current (A)	Effic. (%)	Ø (A) (mm)	Height (B)(mm)	Weight (kg)
TT0030209	30	2×9	2×3,33	83	75	32	0,5
TT0030212	30	2×12	2×1,25	83	75	32	0,5
TT0030215	30	2×15	2×1,00	83	75	32	0,5
TT0030218	30	2×18	2×0,83	83	75	32	0,5
TT0030222	30	2×22	2×0,68	83	75	32	0,5
TT0050212	50	2×12	2×2,08	85	79	34	0,7
TT0050215	50	2×15	2×1,67	85	79	34	0,7
TT0050218	50	2×18	2×1,39	85	79	34	0,7
TT0050222	50	2×22	2×1,14	85	79	34	0,7
TT0080210	80	2×10	2×4,00	86	89	35	0,9
TT0080212	80	2×12	2×3,33	86	89	35	0,9
TT0080215	80	2×15	2×2,67	86	89	35	0,9
TT0080218	80	2×18	2×2,22	86	89	35	0,9
TT0080222	80	2×22	2×1,82	86	89	35	0,9
TT0120212	120	2×12	2×5,00	87	110	38	1,4
TT0120215	120	2×15	2×4,00	87	110	38	1,5
TT0120222	120	2×22	2×2,73	87	110	38	1,6
TT0150218	150	2×18	2×4,17	87	120	44	1,6
TT0160212	160	2×12	2×6,67	87	113	43	1,7
TT0160215	160	2×15	2×5,33	87	113	43	1,7
TT0160218	160	2×18	2×4,44	87	113	43	1,7
TT0160222	160	2×22	2×3,64	87	113	43	1,7
TT0160222	160	2×22	2×3,64	87	113	43	1,7
TT0220212	220	2×12	2×9,17	87	120	52	2,0
TT0220215	220	2×15	2×7,33	87	120	52	2,0
TT0220218	220	2×18	2×6,11	87	120	52	2,0
TT0220222	220	2×22	2×5,00	87	120	52	2,0
TT0220224	220	2×24	2×4,58	87	120	52	2,0
TT0220230	220	2×30	2×3,67	87	120	52	2,0
TT0225225	225	2×25	2×5,00	87	120	52	2,1
TT0225230	225	2×30	2×4,17	87	120	52	2,1
TT0300212	300	2×12	2×12,5	87	123	58	2,3
TT0300218	300	2×18	2×8,33	87	123	58	2,3
TT0300222	300	2×22	2×6,82	87	123	58	2,3
TT0300225	300	2×25	2×6,00	87	123	58	2,3
TT0300230	300	2×30	2×5,00	87	123	58	2,3

Technical Specifications

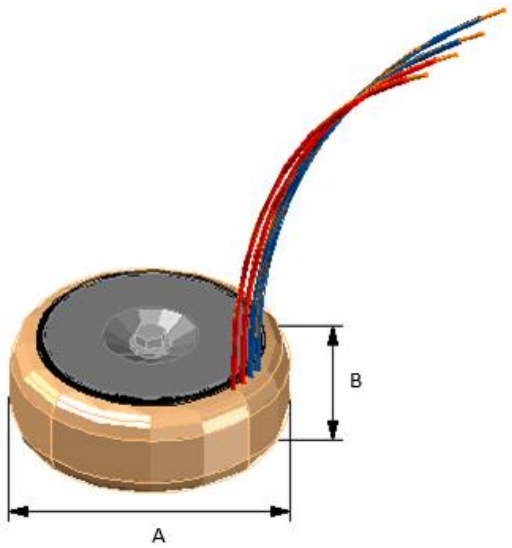

Reference	VA	Secondary (V)	Current (A)	Effic. (%)	Ø (A) (mm)	Height (B)(mm)	Weight (kg)
TT0500218	500	2×18	2×13,89	88	150	60	2,7
TT0500220	500	2×20	2×12,5	88	150	60	2,7
TT0500225	500	2×25	2×10,00	88	150	60	2,7
TT0500240	500	2×40	2×6,25	88	150	60	2,7
TT0500255	500	2×55	2×4,55	88	150	60	2,7
TT0625212	625	2×12	2×26,04	89	150	70	3,0
TT0625218	625	2×18	2×17,36	89	150	70	3,0
TT0625222	625	2×22	2×14,20	89	150	70	3,0
TT0625240	625	2×40	2×7,81	89	150	70	3,0
TT0625250	625	2×50	2×6,25	89	150	70	3,0
TT1000218	1000	2×18	2×27,78	90	165	77	4,5
TT1000222	1000	2×22	2×22,73	90	165	77	4,5
TT1000240	1000	2×40	2×12,50	90	165	77	4,5
TT1000250	1000	2×50	2×10,00	90	165	77	4,5
TT1000255	1000	2×55	2×9,09	90	165	77	4,5

Accessories

VA	Disc	Rubber Pad	Bolt	Nut	Washer
30	2×55	2×60	1×M5×40	2×M5	3×M5
50	2×55	2×60	1×M5×45	2×M5	3×M5
80	2×65	2×70	1×M6×50	2×M6	3×M6
120-160	2×80	2×85	1×M6×55	2×M6	3×M6
220-225	2×80	2×85	1×M6×70	2×M6	3×M6
300	2×80	2×85	1×M6×80	2×M6	3×M6
500	2×100	2×110	1×M8×80	2×M8	3×M8
625	2×100	2×110	1×M8×90	2×M8	3×M8
1000	2×140	2×130	1×M8×100	2×M8	3×M8

TORIVAC.

Specialists in Voltage Regulators and Transformers.

C/Potosí, 2
08030 Barcelona
España

0034 933 120 161

torivac@torivac.com