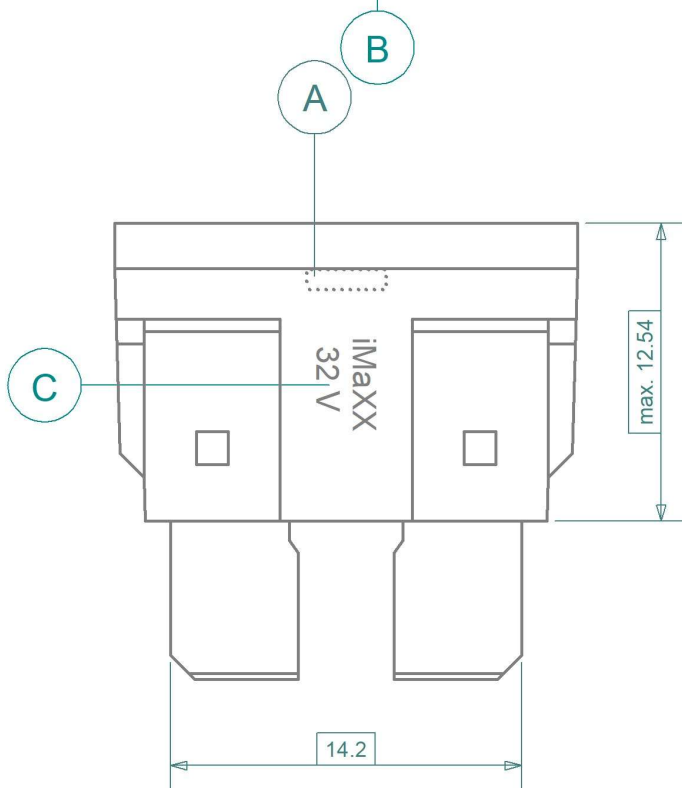
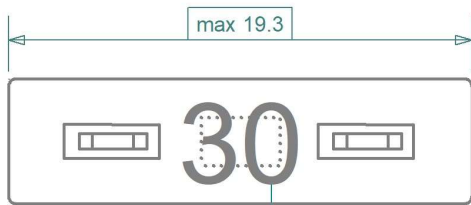



Rating	Color	Volt	iMaXX Reference
[A]		[V]	
2	Gray	32	F1902
3	Violet	32	F1903
4	Pink	32	F1904
5	Tan	32	F1905
7.5	Brown	32	F1975
10	Red	32	F1910
15	Blue	32	F1915
20	Yellow	32	F1920
25	Natural	32	F1925
30	Green	32	F1930
40	Orange	32	F1940

Notes	
A	LED / PCB placement
B	Amperage rating printed on fuse body
C	iMaXX marking and rated voltage
*	Fuse series for after market use

Fusing time SAE J-1284 [s]		
Load [%]	Minimum [s]	Maximum [s]
110 %	360,000	-
135 %	0.75	1,800
200 %	0.15	5
350 %	> 0.08	

Revisions				Date	Appr.			
	Date	Type	Drawn	03/26	GRH			
a	08/11	rating print on top added	Checked	04/26	EB			
b	10/12	updated dimensions	Standards					
c	04/24	added note	Approved	04/26	SS			
d	03/26	re-drawn, new tooling and marking						
e	04/26	updated fuse blades & top view	Scale	Not to scale		Title	F1900 series, ShoBlo normOTO blade fuse	
			Projection	Tolerance ± 0.2 mm unless otherwise noted		Drawing type	schematic	
						Drawing number	F1900 (LED) drawing 1	
						Sheet	1 of 1	
						Layers / Sheet	0 1 2 6 9 Sheet 01	