
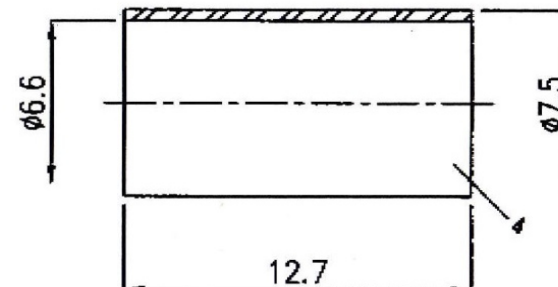
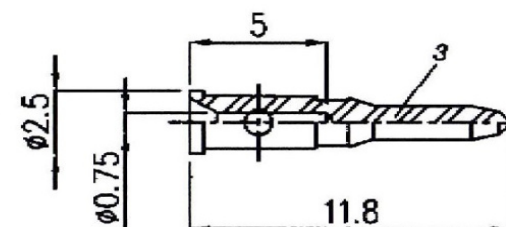


crimp type
for cable up to Ø 6,2mm
Teflon insulation

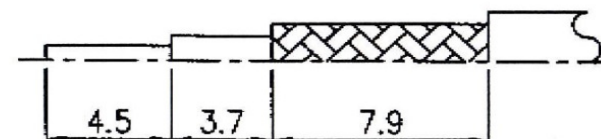

NO	DESCRIPTION	Q'TY	MATERIAL	PLATING
1	BODY	1	BRASS	NICKEL 100μ" MIN.
2	DIELECTRIC	1	PTFE	-
3	CENTER PIN	1	BRASS	GOLD 3-5μ" MIN.
4	FERRULE	1	BRASS	NICKEL 100μ" MIN.
5	SHELL	1	BRASS	NICKEL 100μ" MIN.
6	WASHER	1	BRASS	NICKEL 100μ" MIN.
7	WASHER	1	SEE HIGH CARBON STEEL	NICKEL 100μ" MIN.
8	RETAINING RING	1	BRASS	NICKEL 100μ" MIN.
9	GASKET	1	RUBBER	-

1st N is Nickel for body.
2nd G is Gold for pin.
3rd T is PTFE for insulation.

Tolerance:

0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm
8-30mm ± 0.40mm	30-120mm ± 0.50mm

Prep.:	Date:	Rev.	Date:	Remark:	Prep.:	Check.:	Item No.:
J.A.	29.07.11						
Check.:	Date:						Customer Item No.:
							EAN Bar Code:
Approv.:							<i>All rights reserved</i>
							Page 1 of 1