

45 Series 60V·1a/2a

AEC-Q101 / Hi-Temp (105°C) Available

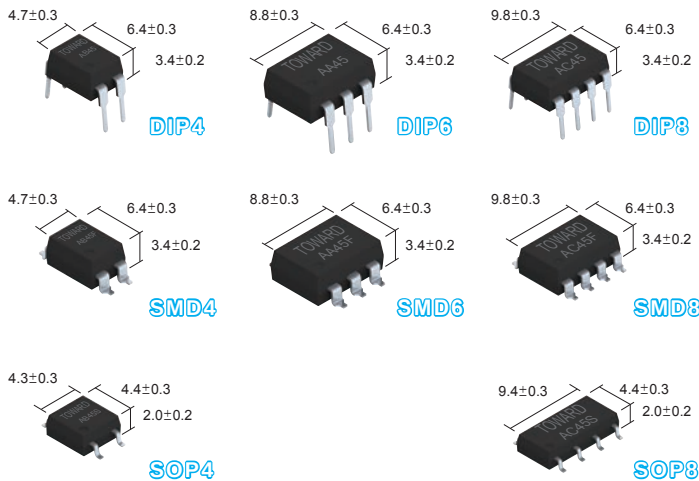


Features

- Contact Form 1a / 2a
- Load Voltage 60V
- Operation LED Current 3.0mA
- Load Current 200mA
- On-Resistance 3 Ω
- Output Capacitance 20pF
- Low Off-State Leakage Current 1.0μA

Application


- Modem
- Telephone Equipment
- Security Equipment
- Sensing Equipment
- Automatic Test Equipment
- I/O Modules
- Electric Vehicle



PART NO	PACKAGE	PACKING
AB45	DIP-4	Tube 90pcs
AA45	DIP-6	Tube 50pcs
AC45	DIP-8	Tube 45pcs
AB45F	SMD-4	Tube 90pcs
AA45F	SMD-6	Tube 50pcs
AC45F	SMD-8	Tube 45pcs
AB45S	SOP-4	Tube 100pcs
AC45S	SOP-8	Tube 50pcs
AB45F-R1	SMD-4	Reel 1000pcs
AA45F-R1	SMD-6	
AC45F-R1	SMD-8	
AB45S-R1	SOP-4	
AC45S-R1	SOP-8	


Terminal Identification

AB45(F)(S)




- 1: Anode (LED)
 2: Cathode (LED)
 3, 4: Drain (MOS FET)

AA45(F)



- 1: Anode (LED)
 2: Cathode (LED)
 3: NC
 4, 6: Drain (MOS FET)
 5: Source (MOS FET)

AC45(F)(S)



- 1, 3: Anode (LED)
 2, 4: Cathode (LED)
 5, 6, 7, 8: Drain (MOS FET)

為了持續的改進，敝司有權在不影響規格範圍的情況下修改設計。

In the interest of continuous development, our companies reserve the right to alter designs within specification range.

Absolute Maximum Ratings 絕對最大定格 (Ambient Temperature 周圍溫度 : 25°C)


Item		Symbol	Value				
Outline Package			AB45S	AC45S	AB45(F)	AC45(F)	AA45(F)
			1CH	2CH	1CH	2CH	1CH
Input 輸入	Continuous LED Current 連續的 LED 電流	I_F	50mA				
	Peak LED Current LED 的峰值電流 (f=100 Hz,duty=1%)	I_{FP}	500mA				
	LED Reverse Voltage 逆向的 LED 電壓	V_R	5V				
	Input Power Dissipation 容許損失	P_{IN}	75mW				
Output 輸出	Load Voltage 負荷電壓	V_L	60V (AC peak or DC)				
	Load Current 負荷電流 (mA)	I_L	200	200	200	200	200
	Peak Load Current 峰值負荷電流 (1 ms,1 shot) (mA)	I_{PEAK}	600	600	600	600	600
	Output Power Dissipation 輸出損耗 (mW)	P_{OUT}	300	450	450	600	450
Total Power Dissipation 全損耗 (mW)		P_T	350	500	500	650	500
I/O Breakdown Voltage 入 / 出力間絕緣電壓 (Vrms)		V_{IO}	1500	1500	3750	3750	3750
I/O Breakdown Voltage 入 / 出力間絕緣電壓 (Suffix-H) (Vrms)		V_{IO}	3750	3750	5000	5000	5000
Operating Temperature 使用時周圍溫度		T_{OPR}	-40°C ~ +85°C				
Storage Temperature 周圍保存溫度		T_{STG}	-40°C ~ +100°C				

Electrical Specifications 電性規格 (Ambient Temperature 周圍溫度 : 25°C)


Item		Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input 輸入	LED Forward Voltage LED 順向電壓	V_F	1.0	1.17	1.5	V	$I_F=10mA$
	Operation LED Current LED 的動作電流	$I_{F ON}$		0.9	3.0	mA	
	Recovery LED Voltage LED 的復位電壓	$V_{F OFF}$	0.5	1.0		V	
Output 輸出	On-Resistance 導通電阻 Drain to Drain	R_{ON}		3	14	Ω	$I_F=5mA, I_L=Rating$ Time to flow is within 1sec.
	Off-State Leakage Current 開路狀態時的電流	I_{LEAK}			1.0	μA	$V_L=60V$
	Output Capacitance 輸出端容量	C_{OUT}		20		pF	
Transmission 傳達	Turn-On Time 動作時間	T_{ON}		0.1	1.0	ms	$I_F=5mA$ $I_L=Rating$ (for SOP type)
	Turn-Off Time 復位時間	T_{OFF}		0.03	0.5	ms	
	Turn-On Time 動作時間	T_{ON}		0.07	1.0	ms	$I_F=10mA$ $I_L=Rating$ (for DIP/SMD type)
	Turn-Off Time 復位時間	T_{OFF}		0.03	0.5	ms	
Coupled 結合	I/O Insulation Resistance 輸入 / 出間的絕緣阻抗	R_{IO}	10^9			Ω	
	I/O Capacitance 輸入 / 力端的靜電容量	C_{IO}		1.3		pF	f=1MHz

General-Purpose

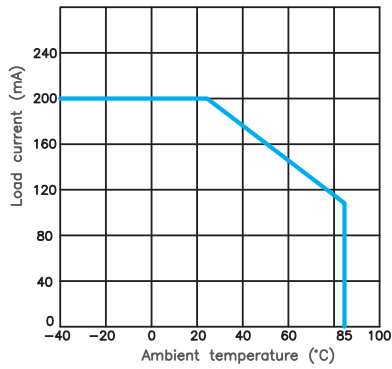
Load current Vs.
Ambient temperature




On resistance Vs.
Ambient temperature

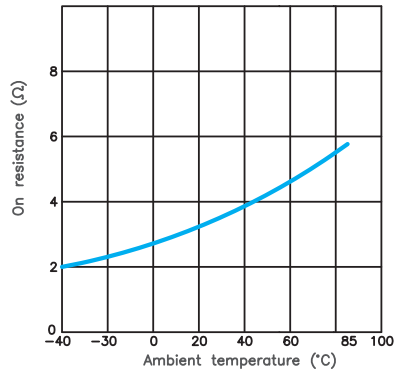


Turn on time Vs.
Ambient temperature

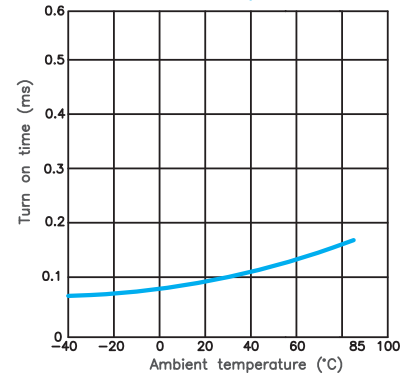


Turn off time Vs.
Ambient temperature

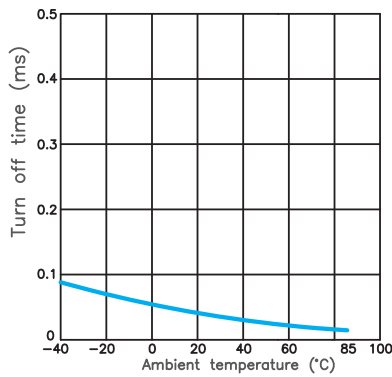

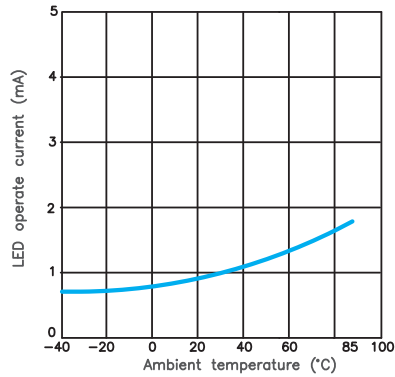
LED operate current Vs.
Ambient temperature



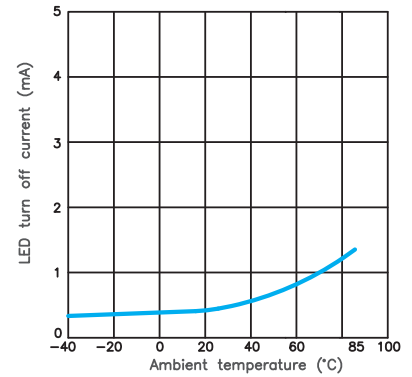
LED Turn off current Vs.
Ambient temperature



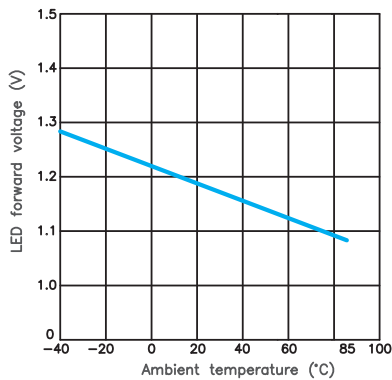
LED forward voltage Vs.
Ambient temperature




Voltage Vs. current characteristics
of output at MOS portion




Off state leakage current

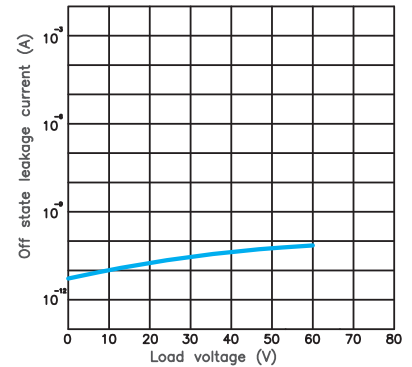

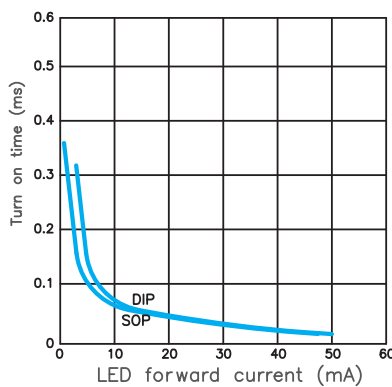
LED forward current Vs.
turn on time characteristics

















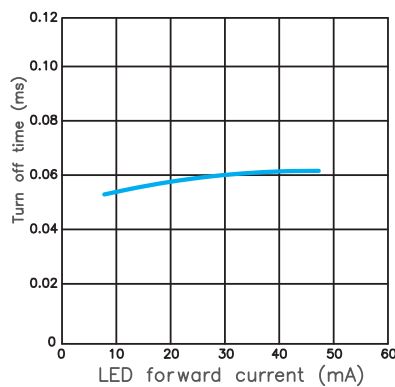
LED forward current Vs.
turn off time characteristics












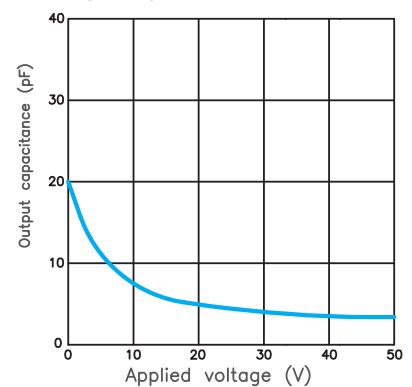
Applied voltage Vs.
output capacitance characteristics



Package & PC Board Pattern

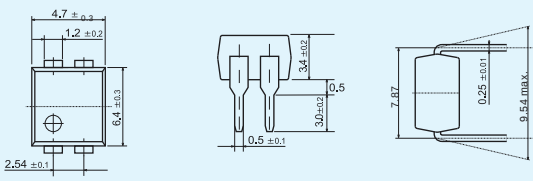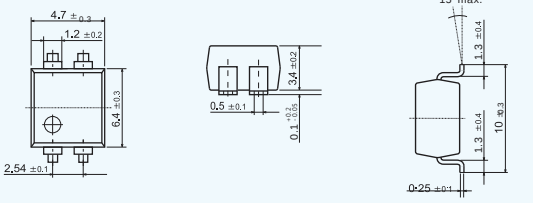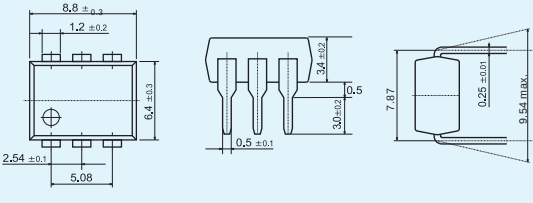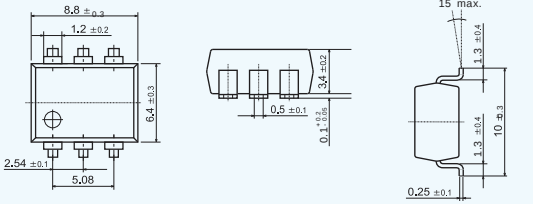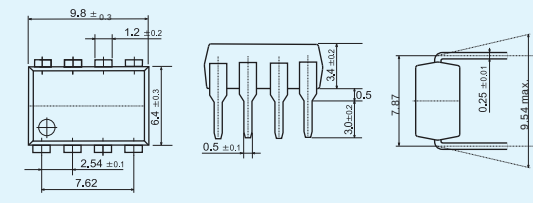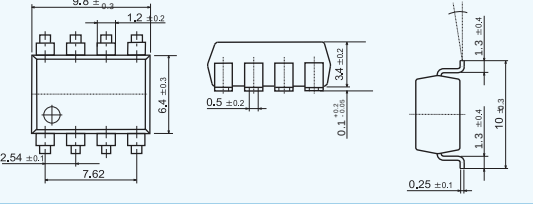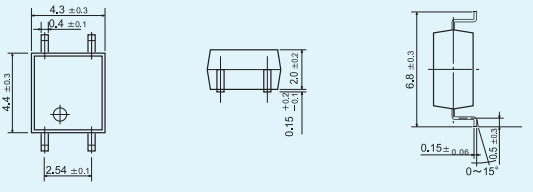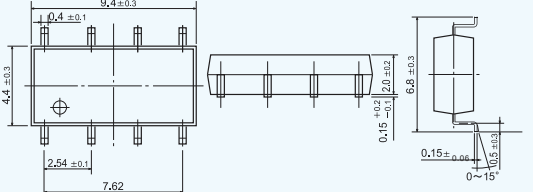Package 包裝	Dimensions 外型尺寸圖	PC Board pattern PC 板加工圖
 DIP4		 (Bottom View)
 SMD4		 (Top View)
 DIP6		 (Bottom View)
 SMD6		 (Top View)
 DIP8		 (Bottom View)
 SMD8		 (Top View)
 SOP4		 (Top View)
 SOP8		 (Top View)

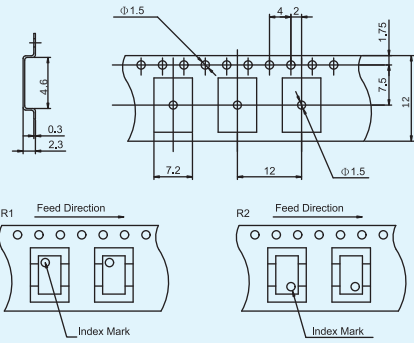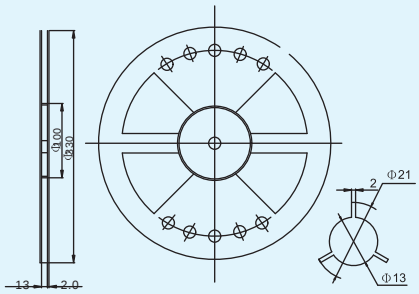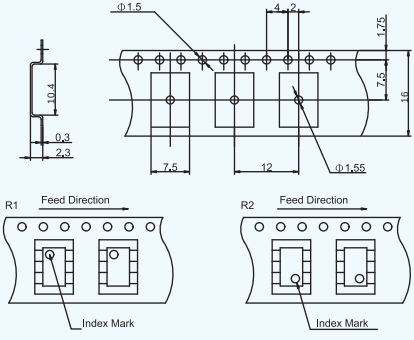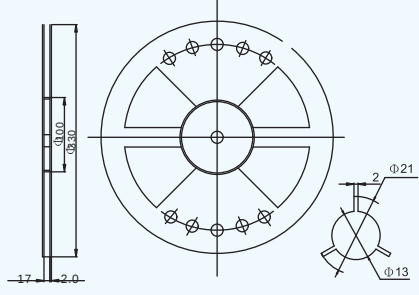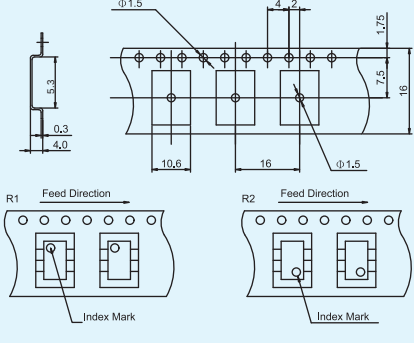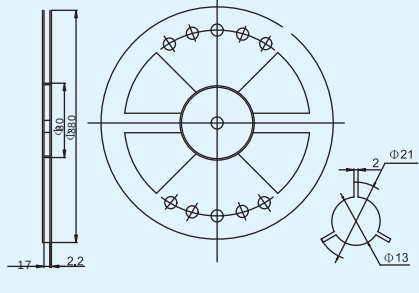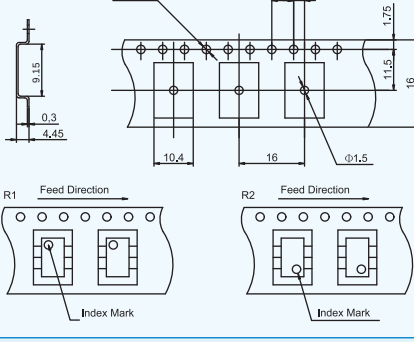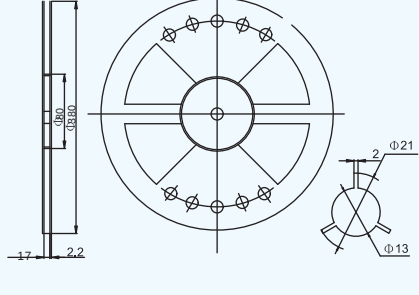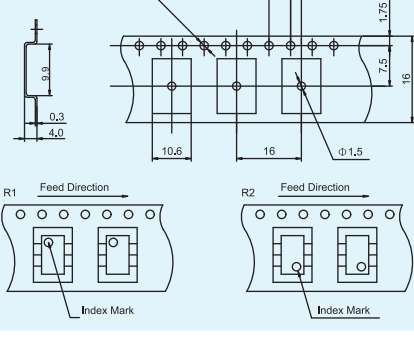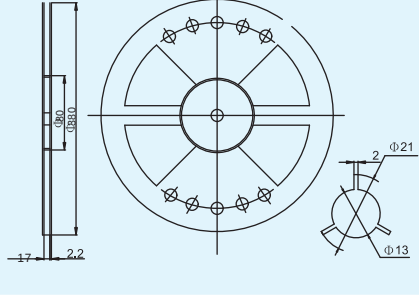Packing Specifications

Package Type 包裝類型	Tape shape & dimensions 形狀和尺寸	Reel shape & dimensions 圈帶形狀和尺寸	Quantity 數量
4 Pin SOP			1000 pcs
8 Pin SOP			1000 pcs
4 Pin SMD			1000 pcs
6 Pin SMD			1000 pcs
8 Pin SMD			1000 pcs

Load Connecting Method

Type 類型	Load 負荷	Connection 接續方法	Feature 特長
4 pin	AC or DC		Control bi-directional signal 可控制雙向信號
6 pin	A AC or DC		Control bi-directional signal 可控制雙向信號
	B DC		On-Resistance is 1/2 of A-connection 導通電阻值是 A 接法的 1/2 2-Make-contacts (Source Common)
C DC	DC		On-Resistance is 1/2 of B-connection 導通電阻值是 B 接法的 1/2
8 pin	AC or DC		2 input and 2 output 2 入力和 2 出力回路
			1 input and 2 output 1 入力和 2 出力回路