


Breitbandlautsprecher LSM-36M/F Art.-Nr.: 115075

Specification :


1. 1	Use Type	36 x17.2mm
1. 2	Rating Power	3 W
1. 3	Voice Coil Impedance	4 Ω $\pm$ 15% at 1000Hz 1.0 V
1. 4	Resonance Frequency	400 Hz $\pm$ 20% at 1.0 V (25°C, 60% RH)
1. 5	Sound Pressure	85 $\pm$ 3dB 0.5m / 1 W at 600, 800, 1000, 1200Hz average
1. 6	Response Range	Fo – 20K Hz deviation 10 dB Max.
1. 7	Distortion	5% max at 1K Hz 1 W
1. 8	Max Input Power	5 W must be normal at a white noise for one min
1. 9	Voice Coil	$\varnothing$ 13.28
1. 10	Magnet Size	Size $\varnothing$ 12.5*3.5
1. 11	Buzz Rattle	Must be normal at sine wave 3.46 V (400~5KHz)
1. 12	Load Test	White noise 3 W 24 Hours
1. 13	Heat Test	55°C $\pm$ 2°C 20-25% H.M. 24 Hours
1. 14	Humidity Test	40°C $\pm$ 2°C 90-95% H.M. 24 Hours
1. 15	Cold Test	-20°C 24 Hours
1. 16	Polarity	When a positive D.C current is applied to the voice coil terminal marked(+). The diaphragm shall move forward

Breitbandlautsprecher LSM-36M/F Art.-Nr.: 115075

Frequency Measuring Circuit :

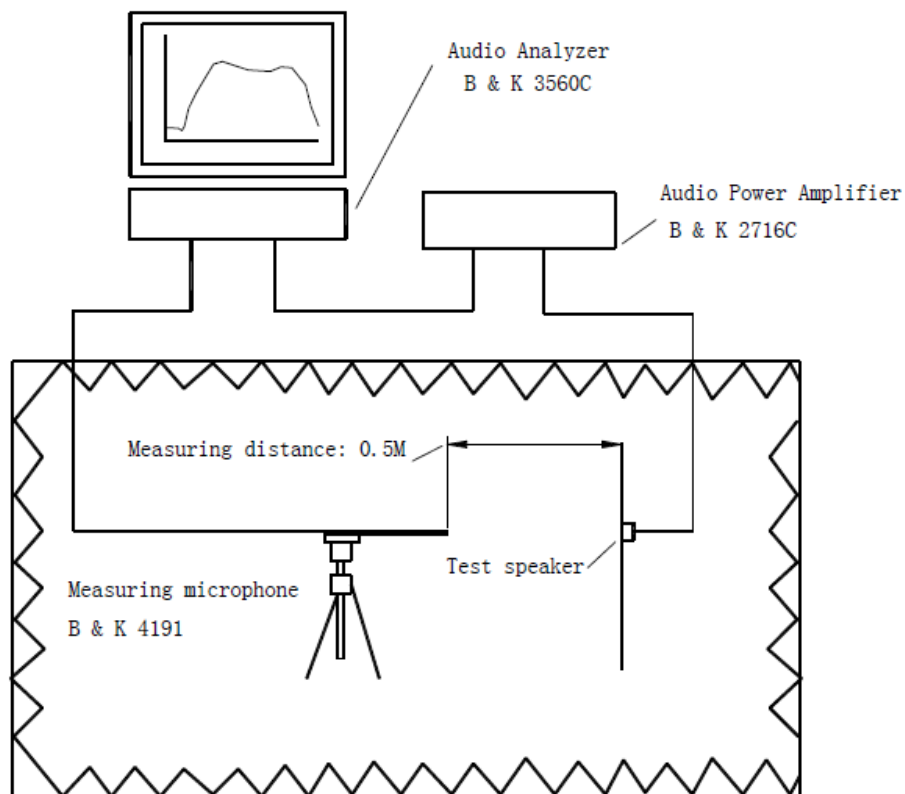

Pulse Report:

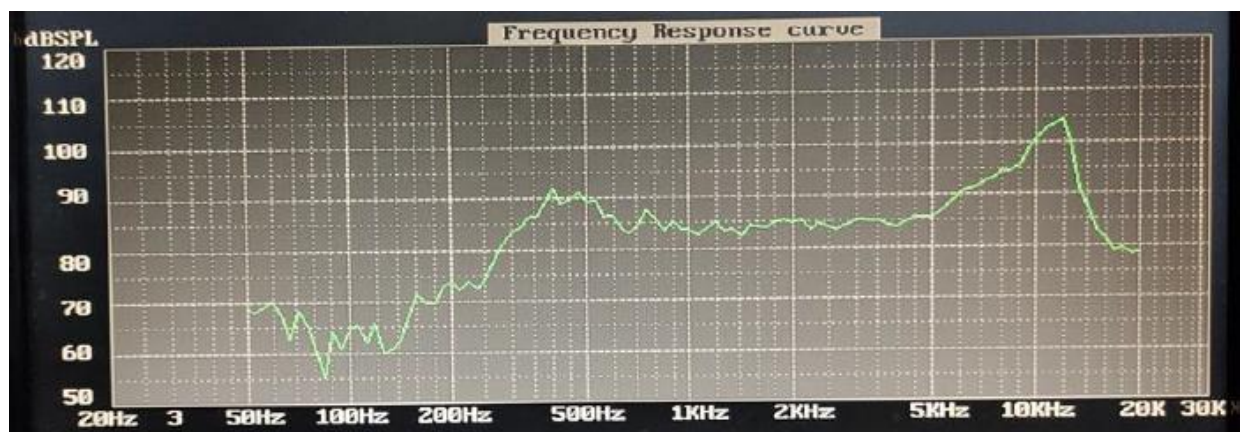

Breitbandlautsprecher LSM-36M/F Art.-Nr.: 115075

Dimensions :

(Unit :mm unless otherwise specifid, tolerance : ± 0.5)

