


BNC plug 75 Ohm

crimp type, Delrin insulation
for cable up to Ø6,2mm

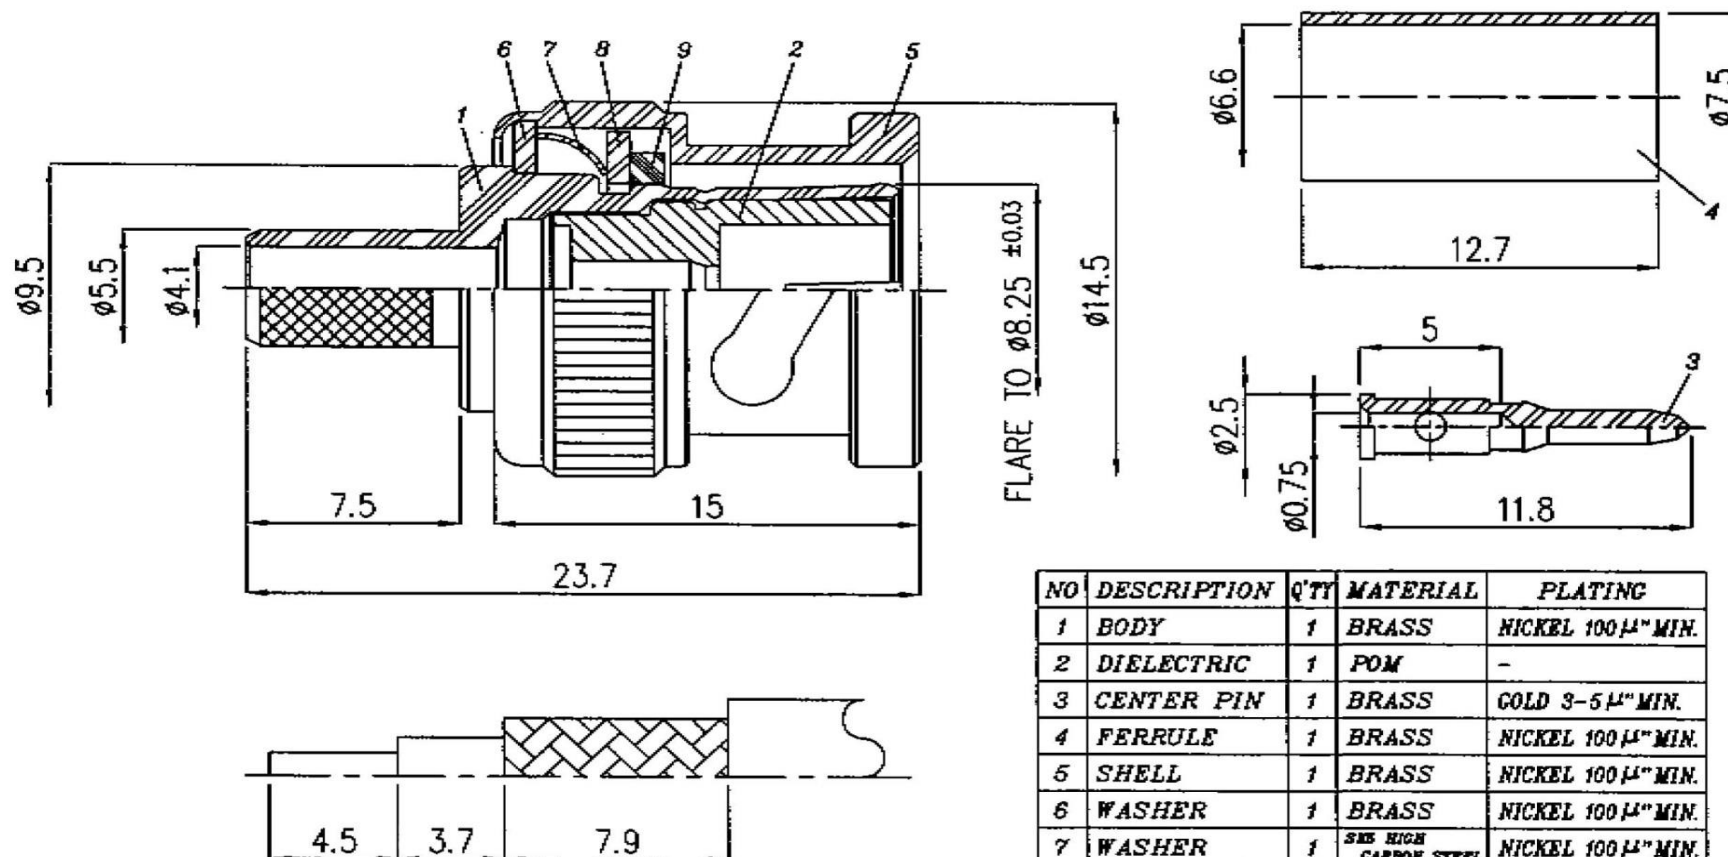

NO	DESCRIPTION	QTY	MATERIAL	PLATING
1	BODY	1	BRASS	NICKEL 100 µ" MIN.
2	DIELECTRIC	1	POM	-
3	CENTER PIN	1	BRASS	GOLD 3-5 µ" MIN.
4	FERRULE	1	BRASS	NICKEL 100 µ" MIN.
5	SHELL	1	BRASS	NICKEL 100 µ" MIN.
6	WASHER	1	BRASS	NICKEL 100 µ" MIN.
7	WASHER	1	SEE HIGH CARBON STEEL	NICKEL 100 µ" MIN.
8	RETAINING RING	1	BRASS	NICKEL 100 µ" MIN.
9	GASKET	1	RUBBER	-

General Tolerances

0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm
8-30mm ± 0.40mm	30-120mm ± 0.50mm

Unit: mm

NCD: 1st N is Nickel for body.
2nd G is Gold for pin.
3rd D is POM for insulation.

All material in accordance with RoHS!

Prep.:	Date:	Rev.:	Date:	Remark:	Prep.:	Check.:	Item No.:
J.A.	02.09.13						B.89 K G
Check.:	Date:						Customer Item No.:
							EAN Bar Code:
Approv.:							All rights reserved