


WIRE TO BOARD

Housing


Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Copper Alloy
Rated current:	3 Amp.
Rated voltage:	250 V _{RMS} /V _{DC}
Withstand voltage:	1000 V _{RMS} min.
Operating temperature:	-40°C to +85°C

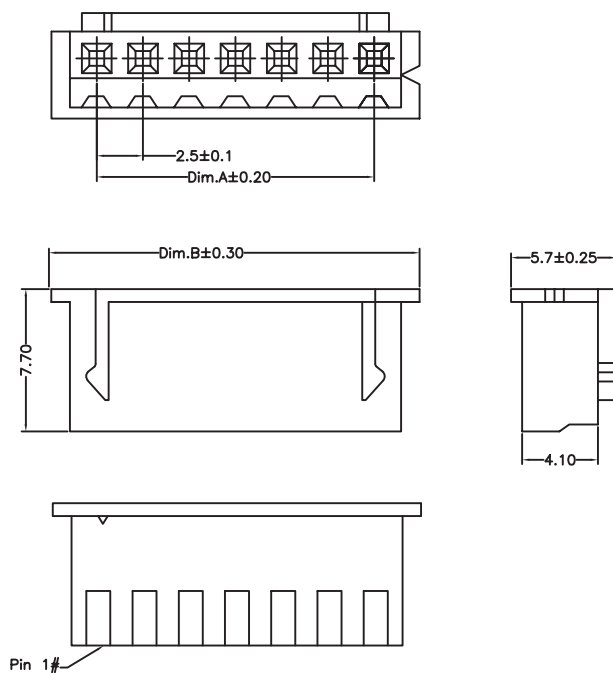

Dimension:

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
002	2.5	7.40	012	27.50	32.40
003	5.00	9.90	013	30.00	34.90
004	7.50	12.40	014	32.50	37.40
005	10.00	14.90	015	35.00	39.90
006	12.50	17.40	016	37.50	42.40
007	15.00	19.90	017	40.00	44.90
008	17.50	22.40	018	42.50	47.40
009	20.00	24.90	019	45.00	49.90
010	22.50	27.40	020	47.50	52.40
011	25.00	29.90			

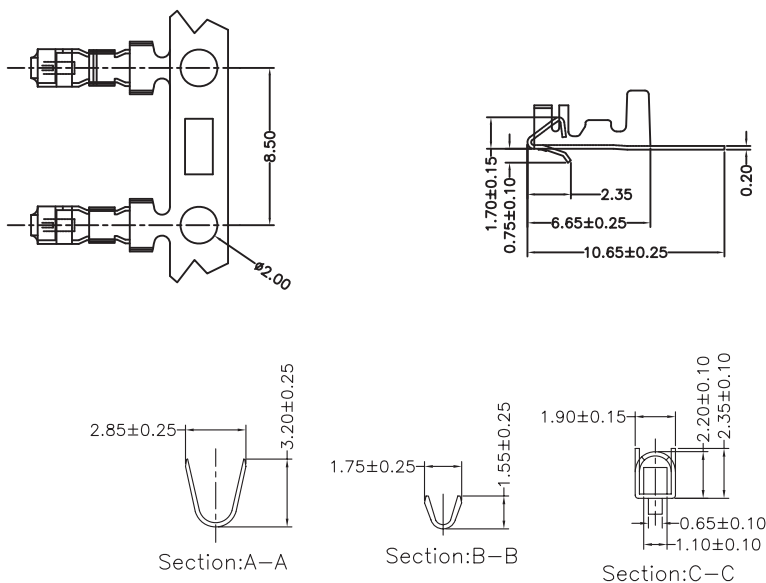

Order code for contact:
CC25-22/30-TT-RL

Plating: Tin
Packaging: 8000 pcs / reel

Pincount: see table

Order code:

906-1-XXX-X-KS0A04