


Data Sheet


Type Number 6025
Designation IEC CR 2025
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH 13654
Nominal Voltage 3 V
Typical Capacity C 157 mAh
 Load 10 kOhm, at 20°C down to 2 V

Weight (approx.) 2,5 g
Volume 0,75 ccm
Coding..... Date of Manufacturing DWWY

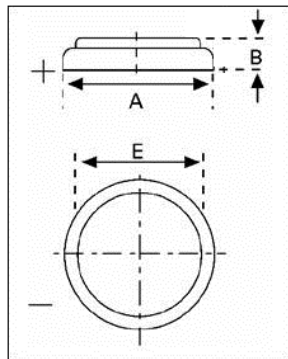

Temperature Ranges
 Storage min -55°C max. 70°C
 Discharge min -40°C max. 85°C*

Dimensions
 Diameter (A) min max.
 Height (B) 19,7 20,0
 Shoulder Diameter[E]..... 2,2 2,5
 18,3

Segment

Main Applications Photo

Watch
 Photo
 Electronic

Typical Capacities (at 20°C)


Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w	10000 Ω	Time: Capacity [mAh]: Energy [mWh]:	552 h 157 440

* Contact VARTA if the application is intended to be outside the range of -20°C to 70°C.


Data Sheet

Performance Data:

• Temperature Characteristics

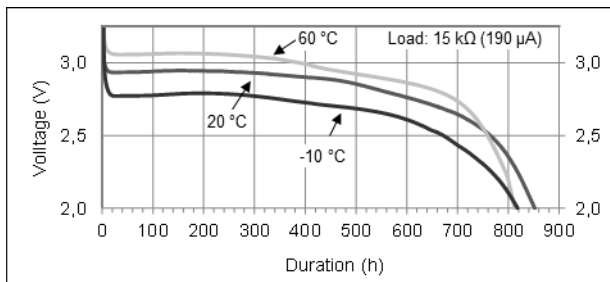


• Operating Voltage vs. load resistance *

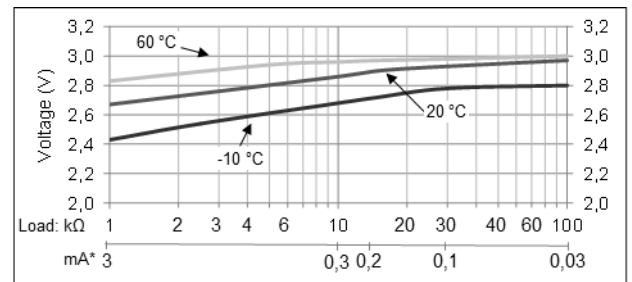

* Voltage at 50% discharge depth

• Capacity vs. load resistance

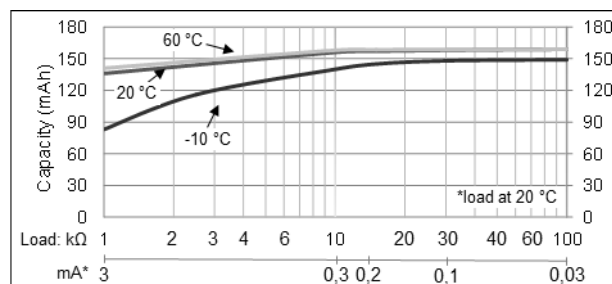

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life* > 10 years

* depending on environmental condition and energy consumption

Information and contents in this data sheet are for reference purpose only.

They do not constitute any warranty or representation and are subject to change without notice.

For most current information and further details, please contact your VARTA representative.

VARTA Microbattery GmbH, VARTA-Platz 1, D-73479 Ellwangen/Jagst

Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-2553

Date of issue: 2022-08-12

Subject to change without prior notice!