
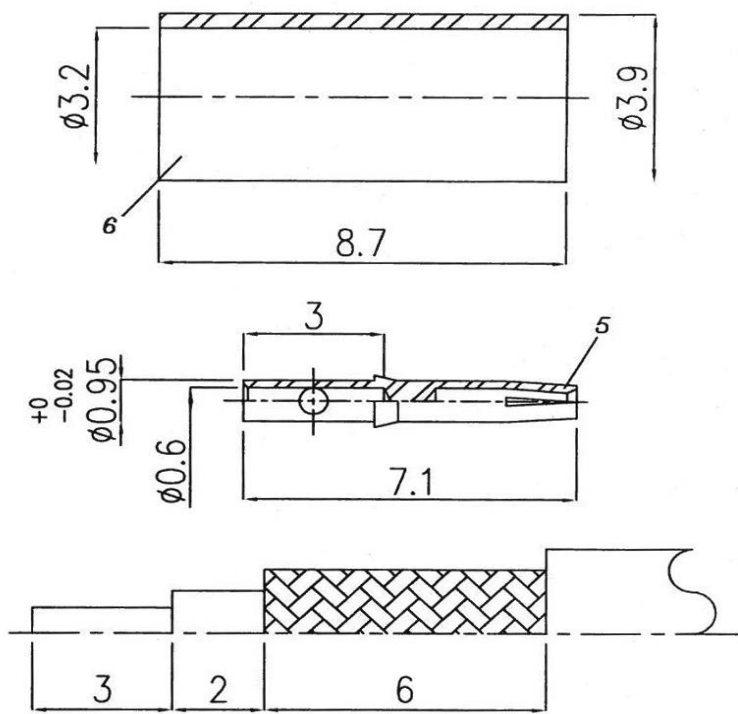


SMB cable jack (female), crimp type, for cable upto Ø 2.65 mm (f.e. RG174U, RG316U), teflon insulation

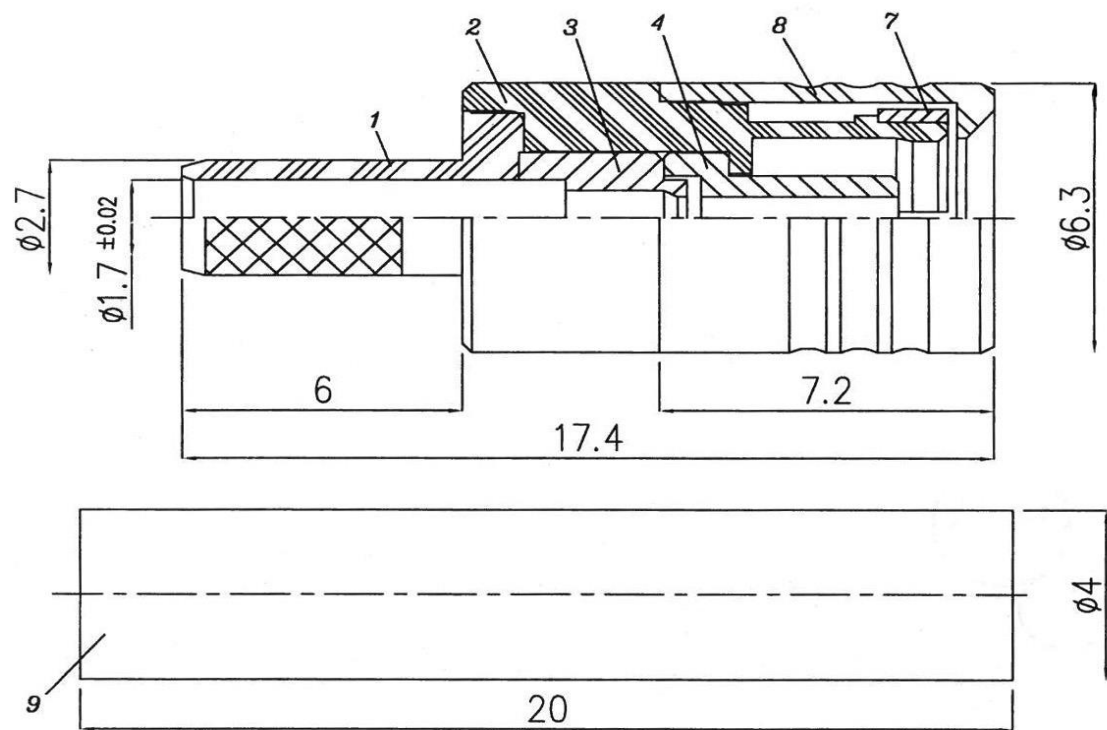

NO	DESCRIPTION	Q'TY	MATERIAL	PLATING
1	BODY 1	1	BRASS	GOLD
2	BODY 2	1	BRASS	GOLD
3	DIELECTRIC 1	1	PTFE	-
4	DIELECTRIC 2	1	PTFE	-
5	CENTER PIN	1	BERYLLIUM COPPER	GOLD
6	FERRULE	1	BRASS	GOLD
7	RETAINING RING	1	BERYLLIUM COPPER	
8	SHELL	1	BRASS	GOLD
9	SHRINK TUBING	1	-	-

TOLERANCES			
0-0.5mm	± 0.10mm	0.5-8mm	± 0.20mm
8-30mm	± 0.40mm	30-120mm	± 0.50mm
UNIT		mm	

All Material in accordance with REACH and RoHS!

	Prep.:	Date:	Rev.:	Date:	Remark:	Prep.:	Check.:	Item No.:	SMBC 74
	J.A.	25.01.19							
	Check.:	Date:						Customer Item No.:	
								EAN Bar Code:	
Approv.:								All rights reserved	Page 1 of 1