



DATASHEET

**Technical data:**

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Phosphor bronze
Plating:	Au
Rated current:	3 Amp.
Rated voltage:	250 V _{RMS} /V _{DC}
Withstand voltage:	500 V _{RMS} for one minute
Operating temperature:	-40°C to +105°C
Max. processing temp.:	260°C for 10 seconds

RoHS compliant

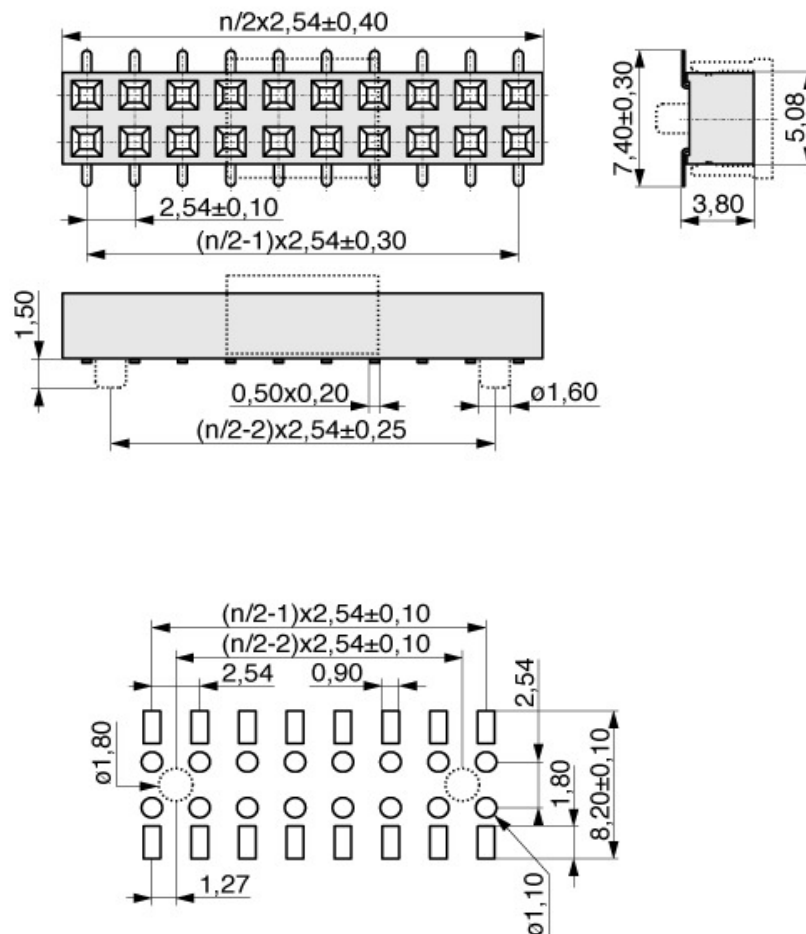

Pincount: 050

Plating: F = Au

Packaging: T = Tube

Order code: **098-3-050-0-NFX-YT0**Part No. : **12 0098 002 35**