



Winkelstifte, Winkel-Wrap-Stifte für gedruckte Schaltungen

Chevilles angulaires, Chevilles angulaires Wire-Wrap pour circuits imprimés

Angle pins, Wire-Wrap angle pins for printed circuitry

Werkstoff:

BZ = Bronze
 MS = Messing
 NS = Neusilber

Matière:

BZ = bronze
 MS = laiton
 NS = maillechort

Material:

BZ = bronze
 MS = brass
 NS = german silver

Oberflächenbehandlung: Code

bl = blank (0)
 ag = versilbert (1)
 au = vergoldet (2)
 sn = verzinkt (8)

Traitements de surface: Code

bl = brut (0)
 ag = argenté (1)
 au = doré (2)
 sn = étamé (8)

Surface-plating: Code



bl = clean (0)
 ag = silver-plated (1)
 au = gold-plated (2)
 sn = tin-plated (8)

Bestellbeispiel:
Exemple de commande:
Example of order:

1080V.68 lose / en vrac / in bulk
 (1080V MS sn)

magaziniert / emmagasiné / wired

01080V.68
 (01080V MS sn)



lose / en vrac / in bulk

magaziniert / emmagasiné / wired

Artikel-Nr. Numéro d'article Part-No.	1080U.6() MS	1081L.6() MS	01081L.6() MS	1080Q.6() MS	1080H.6() MS	1080C.6() MS	1080P.6() MS
Print Bohrung → Trou Hole	Ø 0.8 T 2.1 H 3.5 L 9.5 C 6.7 A 2.5 B1 0.6 B 0.8 S 0.5	Ø 0.8 T 2.4 H 5.8 L 11.85 C - A 2.5 B1 0.7 B 0.7 S 0.6	Ø 0.8 T 2.4 H 5.8 L 11.85 C - A 2.5 B1 0.7 B 0.7 S 0.6	Ø 0.8 T 3.0 H 4.4 L 8.5 C 5.0 A 2.5 B1 0.7 B 0.7 S 0.6	Ø 0.8 T 3.0 H 4.4 L 11.2 C 5.0 A 2.5 B1 0.7 B 0.7 S 0.6	Ø 1.0 T 2.5 H 4.5 L 8.0 C 3.5 A 3.0 B1 1.0 B 1.0 S 0.5	Ø 1.0 T 2.5 H 4.5 L 8.8 C 3.5 A 3.0 B1 1.0 B 1.0 S 0.5
Stand.-Packg.	5000	2000	5400	5000	2000	5000	5000
Werkzeuge Outils / Tools	1037/34	1037/34	1051B	1037/34	1037/34	1037/25	1037/25


Artikel-Nr. Numéro d'article Part-No.	1080V.6() MS	01080V.6() MS	1080S.6() MS	01080S.6() MS	1080Y.6() MS	1080W.6() MS	1080R.6() MS
Print Bohrung → Trou Hole	Ø 1.0 T 2.5 H 5.5 L 7.2 C 2.3 A 2.5 B1 1.0 B 1.0 S 0.5	Ø 1.0 T 2.5 H 5.5 L 7.2 C 2.3 A 2.5 B1 1.0 B 1.0 S 0.5	Ø 1.0 T 2.5 H 5.5 L 8.8 C 2.3 A 2.5 B1 1.0 B 1.0 S 0.5	Ø 1.0 T 2.5 H 5.5 L 8.8 C 2.3 A 2.5 B1 1.0 B 1.0 S 0.5	Ø 1.1 T 3.0 H 4.6 L 18.5 C - A 5.0 B1 1.6 B 0.9 S 0.8	Ø 1.1 T 3.0 H 5.0 L 18.5 C 5.5 A 5.0 B1 1.6 B 0.9 S 0.8	Ø 1.1 T 3.0 H 5.0 L 28.0 C 5.5 A 5.0 B1 1.6 B 0.9 S 0.8
Stand.-Packg.	5000	4800	5000	4800	2000	2000	1000
Werkzeuge Outils / Tools	1037/25	1051V	1037/25	1051S	1037/44	1037/39	1037/39




Winkelstifte, Winkel-Wrap-Stifte für gedruckte Schaltungen

Chevilles angulaires, Chevilles angulaires Wire-Wrap pour circuits imprimés


Angle pins, Wire-Wrap angle pins for printed circuitry

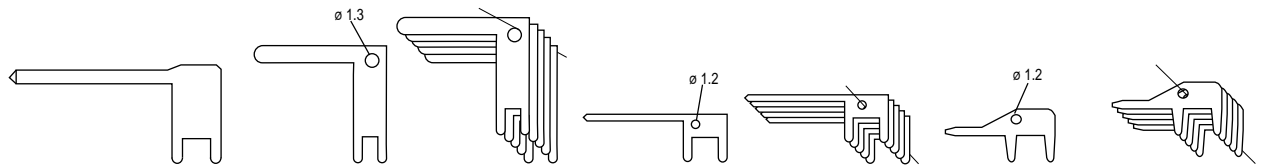

Artikel-Nr. Numéro d'article Part-No.	1080E.6 () MS	1080G.6 () MS	01080G.6 () MS	1080T.6 () MS	01080T.6 () MS	1080M08.6 () MS	01080M08.6 () MS
Print Bohrung Trou Hole	Ø 1.1 T 3.0 H 13.0 L 28.0 C 5.5 A 5.0 B1 1.6 B 0.9 S 0.8	Ø 1.1 T 3.0 H 17.5 L 15.5 C - A 2.5 B1 1.6 B 0.8 S 1.0	Ø 1.1 T 3.0 H 17.5 L 15.5 C - A 2.5 B1 1.6 B 0.8 S 1.0	Ø 1.1/1.2 T 3.0 H 6.3 L 19.0 C - A 5.0 B1 0.8 B 1.0 S 0.8	Ø 1.1/1.2 T 3.0 H 6.3 L 19.0 C - A 5.0 B1 0.8 B 1.0 S 0.8	Ø 1.2 T 3.5 H 7.0 L 14.5 C 4.4 A 5.0 B1 1.0 B 1.1 S 0.8	Ø 1.2 T 3.5 H 7.0 L 14.5 C 4.4 A 5.0 B1 1.0 B 1.1 S 0.8
Stand.-Packg.	2000	2000	1600	2000	2000	2000	2000
Werkzeuge Outils / Tools	1037/24	1037/24	1051C	1037/39	1051T	1037/24	1051G

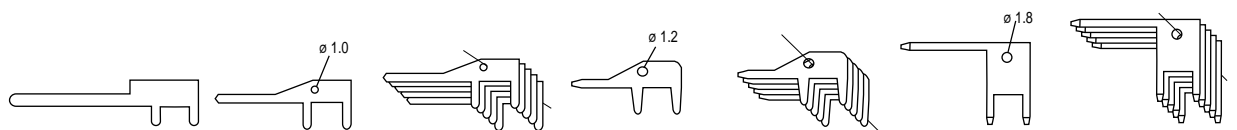

Artikel-Nr. Numéro d'article Part-No.	1080K.6 () MS	1080A.6 () MS	01080A.6 () MS	1080M.6 () MS	01080M.6 () MS	1080X.6 () MS 1080X.9 () ST	01080X.6 () MS 01080X.9 () ST
Print Bohrung Trou Hole	Ø 1.2/1.3 T 2.5 H 6.0 L 25.0 C 9.0 A 5.0 B1 1.5 B 1.0 S 0.8	Ø 1.3 T 3.5 H 6.5 L 18.0 C 4.5 A 5.0 B1 1.0 B 1.1 S 1.0	Ø 1.3 T 3.5 H 6.5 L 18.0 C 4.5 A 5.0 B1 1.0 B 1.1 S 1.0	Ø 1.3 T 3.5 H 7.0 L 14.5 C 4.4 A 5.0 B1 1.0 B 1.1 S 1.0	Ø 1.3 T 3.5 H 7.0 L 14.5 C 4.4 A 5.0 B1 1.0 B 1.1 S 1.0	Ø 1.3 T 4.2 H 10.8 L 17.0 C - A 5.0 B1 1.0 B 1.0 S 1.0	Ø 1.3 T 4.2 H 10.7 L 17.0 C - A 5.0 B1 1.0 B 1.0 S 1.0
Stand.-Packg.	1000	2000	1600	2000	1600	2000	1600
Werkzeuge Outils / Tools	1037/39	1037/24	1051A	1037/24	1051M	1037/24	1051X

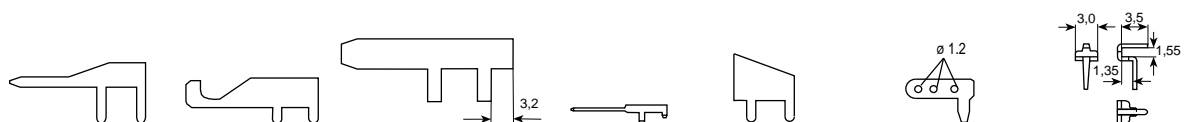

Artikel-Nr. Numéro d'article Part-No.	1080B.2 () BZ 1080B.6 () MS	1080L.6 () MS	1080D.6 () MS	1080Z.2 () BZ	1082.6 () MS	1084.6 () MS	1081.7 () NS
Print Bohrung Trou Hole	Ø 1.3 T 5.0 H 8.0 L 18.0 C 4.5 A 5.0 B1 1.0 B 1.1 S 1.0	Ø 1.2/1.3 T 2.5 H 6.0 L 17.5 C 9.0 A 5.0 B1 3.5 B 1.0 S 0.8	Ø 1.65 T 4.8 H 8.3 L 22.8 C - A 6.4 B1 3.5 B 1.6 S 0.8	Ø 0.8 T 0.9/1.7 H 2.45 L 12.7 C 5.4 A 3.0 B1 0.6 B 0.55 S 0.65	Ø 1.2 T 3.0 H 9.0 L 8.0 C - A 5.0 B1 - B 1.0 S 0.8	Ø 1.4/1.5 T 3.2 H 5.7 L 9.0 C - A - B1 2.5 B 1.45 S 0.6	Ø 1.1 T 3.5 H 6.05 L 4.0 C - A - B1 - B 1.1 S 0.5
Stand.-Packg.	2000	1000	1000	2000	2000	2000	5000
Werkzeuge Outils / Tools	1037/24	1037/39	-	-	-	-	-



Gabelkontaktfedern

Pièces de raccord à ressort

Spring contacts

Werkstoff:

BZ = Bronze
 MS = Messing
 NS = Neusilber

Oberflächenbehandlung: Code

bl = blank (0)
 ag = versilbert (1)
 au = vergoldet (2)
 sn = verzinkt (8)

Bestellbeispiel:
Exemple de commande:
Example of order:

1335.28 lose / en vrac / in bulk
 (1335 BZ sn)

magaziniert / emmagasiné / wired
01335.28
 (01335 BZ sn)

Matière:

BZ = bronze
 MS = laiton
 NS = maillechort

Traitements de surface: Code



bl = brut (0)
 ag = argenté (1)
 au = doré (2)
 sn = étamé (8)

Material:


BZ = bronze
 MS = brass
 NS = german silver

Surface-plating: Code


bl = clean (0)
 ag = silver-plated (1)
 au = gold-plated (2)
 sn = tin-plated (8)



magaziniert / emmagasiné / wired

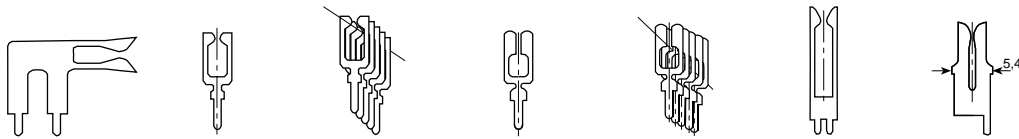

Artikel-Nr. Numéro d'article Part-No.	1341G.2() BZ	1335.2() BZ	01335.2() BZ	1335L.2() BZ	01335L.2() BZ	1341Z.7() NS	1341E.2() BZ
Print Bohrung Trou Hole	Ø 0.8 T 3.0 L 13.0 B1 4.4 Z 1.0 A 5.0 C 17.0 B 0.6 S 0.8	Ø 0.8 T 4.2 L 12.8 B1 3.8 Z 0.45 A - C - B 0.8 S 0.5	Ø 0.8 T 4.2 L 12.8 B1 3.8 Z 0.45 A - C - B 0.8 S 0.5	Ø 0.8 T 4.2 L 12.8 B1 3.8 Z 0.6 A - C - B 0.8 S 0.5	Ø 0.8 T 4.2 L 12.8 B1 3.8 Z 0.6 A - C - B 0.8 S 0.5	Ø 1.0 T 1.8 L 16.8 B1 3.6 Z 0.5 A 2.0 C - B 0.8 S 0.8	Ø 1.0 T 2.5 L 14.9 B1 3.4 Z 0.6 A - C - B 0.8 S 0.8
Stand.-Packg.	500	2000	4800	2000	4800	500	2000
Werkzeuge Outils / Tools	1037/26	1035/12	1041G	1035/12	1041G	1035/6	1035/6

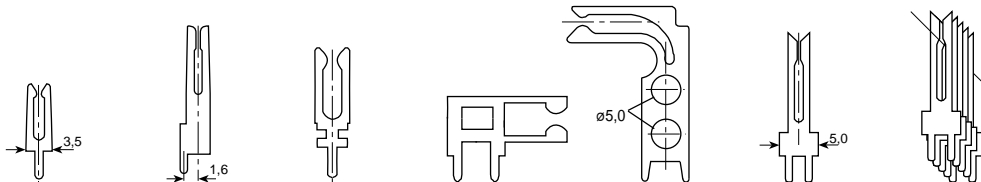



Artikel-Nr. Numéro d'article Part-No.	1338.6() MS	1341D.2() BZ	1347.6() MS	1341F.2() BZ	1341V.2() BZ	1341R.2() BZ	01341R.2() BZ
Print Bohrung Trou Hole	Ø 1.0 T 3.5 L 12.6 B1 3.0 Z 1.0 A - C - B 1.0 S 0.7	Ø 1.1 T 2.5 L 19.5 B1 2.8 Z 0.55 A - C - B 1.0 S 0.8	Ø 1.1 T 4.2 L 17.8 B1 4.6 Z 1.7 A - C - B 1.0 S 0.7	Ø 1.2 T 3.3 L 11.3 B1 5.5 Z 0.85 A 5.0 C 15.9 B 1.0 S 0.8	Ø 1.2 T 3.2 L 29.6 B1 5.6 Z 1.4 A 7.0 C 20.7 B 1.2 S 0.8	Ø 1.2 T 3.5 L 20.0 B1 3.0 Z 0.5 A 2.5 C - B 1.0 S 0.8	Ø 1.2 T 3.5 L 20.0 B1 3.0 Z 0.5 A 2.5 C - B 1.0 S 0.8
Stand.-Packg.	2000	2000	1000	1000	5000	2000	5000
Werkzeuge Outils / Tools	1035/65	-	1037/22	1037/26	1037/24	-	1041R




Steck-Kontakte

Pièces de raccord enfichables

Contacts to push-on

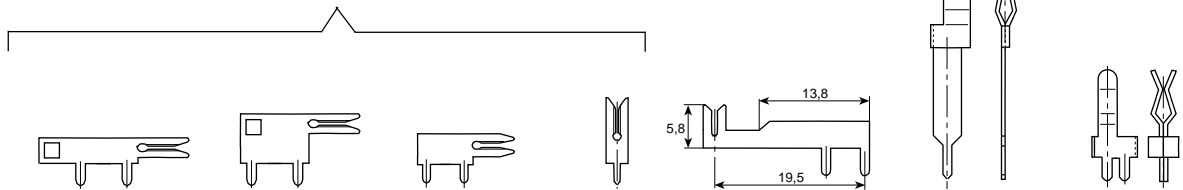

Artikel-Nr. Numéro d'article Part-No.	1006G.2() BZ	1005G.2() BZ	1004G.2() BZ	1003G.2() BZ	1356.2() BZ	1341P.7() NS	1341K.2() BZ 1341K.7() NS
Print Bohrung Trou Hole	Ø 1.2 T 3.0 L 6.5 B1 2.6 Z 0.4 A 5.0 C 18.7 B 1.1 S 0.6	Ø 1.2 T 3.0 L 9.5 B1 2.6 Z 0.4 A 5.0 C 15.8 B 1.1 S 0.6	Ø 1.3 T 3.0 L 6.5 B1 2.6 Z 0.5 A 5.0 C 12.8 B 1.1 S 0.6	Ø 1.3 T 3.1 L 11.5 B1 2.9 Z 0.3 A - C - B 1.2 S 0.7	Ø 1.0/1.1 T 4.0 L 7.5 B1 2.5 Z 0.6 A 5.0 C 22.0 B 1.0 S 0.6	Ø 1.2 T 4.5 L 28.5 B1 3.0 Z 0.1 A - C 4.8 B 1.2 S 0.3	Ø 1.3 T 3.0 L 14.7 B1 2.5 Z 0.1 A 2.5 C 6.0 B 1.3 S 0.3
Stand.-Packg.	500	2000	500	2000	1000	1000	1000
Werkzeuge Outils / Tools	-	1037/26	1037/24	1035/13	-	-	-

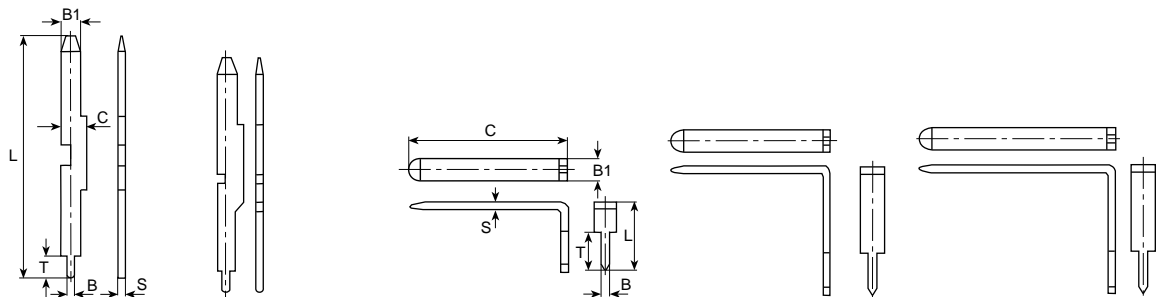

Artikel-Nr. Numéro d'article Part-No.	1026.6() MS	1026B.6() MS	1026F.6() MS	1026T.6() MS	1026G.6() MS
Print Bohrung Trou Hole	Ø 1.2/1.3 T 3.0 L 32.0 B1 2.5 Z - A - C 3.5 B 1.0 S 1.0	Ø 1.2/1.3 T 3.0 L 31.0 B1 2.5 Z - A - C 3.5 B 1.0 S 1.0	Ø 1.2 T 5.5 L 10.0 B1 3.0 Z - A - C 21.0 B 1.0 S 1.0	Ø 1.2 T 5.5 L 17.0 B1 3.0 Z - A - C 21.0 B 1.0 S 1.0	Ø 1.2 T 5.5 L 17.0 B1 3.0 Z - A - C 26.0 B 1.0 S 1.0
Stand.-Packg.	500	500	500	500	200
Werkzeuge Outils / Tools	-	-	-	-	-