

**SAFETY ISOLATING TRANSFORMER**


POWER : 18VA  
 INPUT VOLTAGE : 2x115V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x18V

**NON SHORT CIRCUIT PROOF TRANSFORMER**

IP00  
 UL94HB  
 OPERATING TEMPERATURE : -25°C to 50°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : ON PRIMARY 200mA (115V)  
 100mA (230V)

**STANDARDS :**  
 UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

**CONFORM TO :**  
 EN61558-1  
 EN61558-2-6

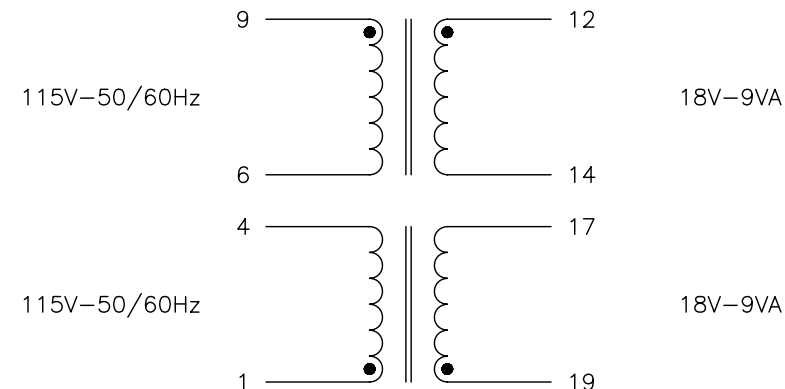

Rev	Date	Modification	Dessiné	Visa
D				
C				
B				
A				

<b>Finition:</b>		<b>Tolérance générale:</b>	
<b>Finition:</b>		<b>General tolerance:</b>	
<b>Ech:</b> 1:1	<b>Matière:</b>		
	<b>Material:</b>		
<b>Dessiné par:</b> ROUSSEL.Ch	<b>Date:</b> 20/09/2005	<b>Visa:</b>	J.P.M.
<b>DATA SHEET 45053</b>			
<b>UI 39x13.5</b>			
		22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGIEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	
		<b>DS45053</b>	